ENGINEERING NEWS-RECORD

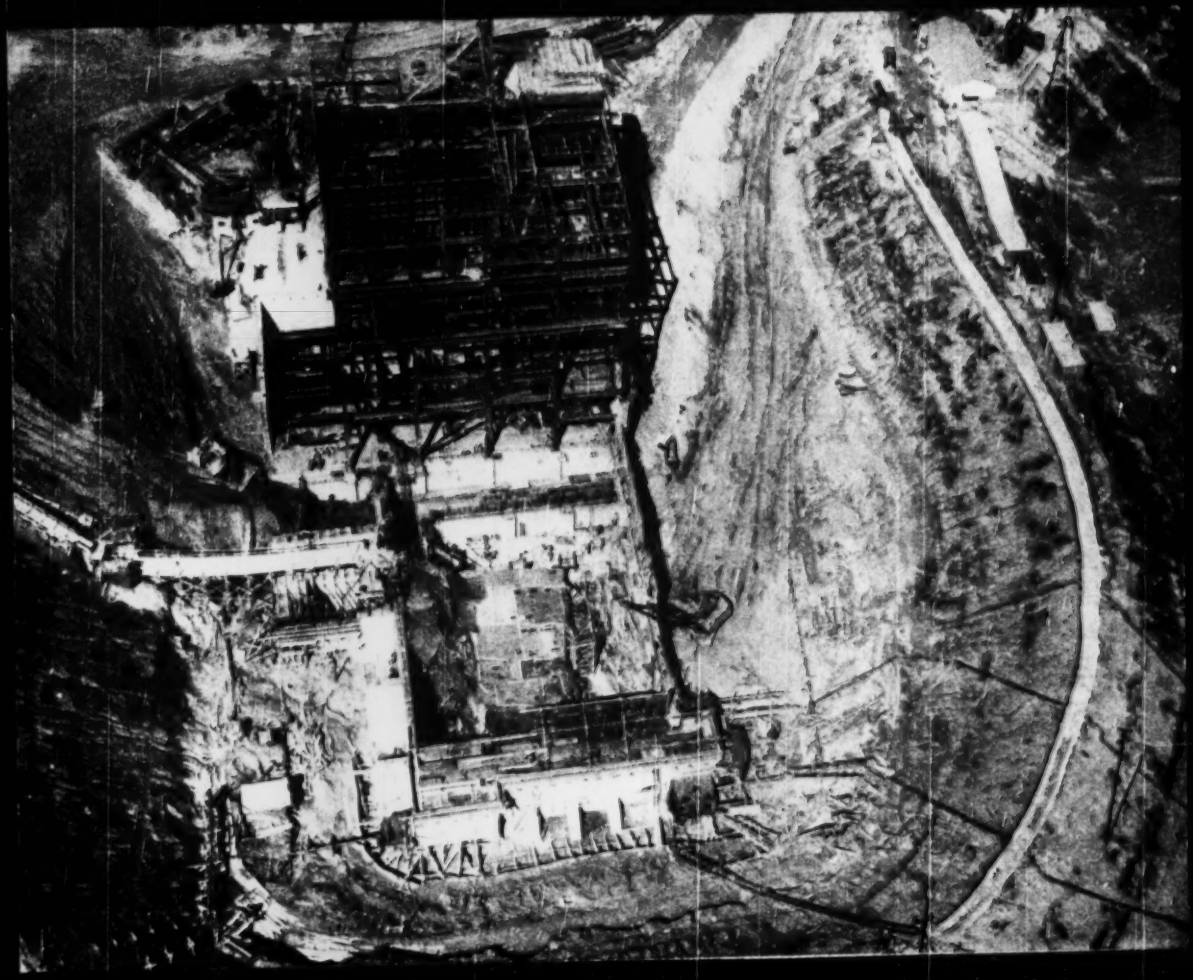

A McGRAW-HILL PUBLICATION

Wieboldt's New Store has COMPLETE FIRE PROTECTION

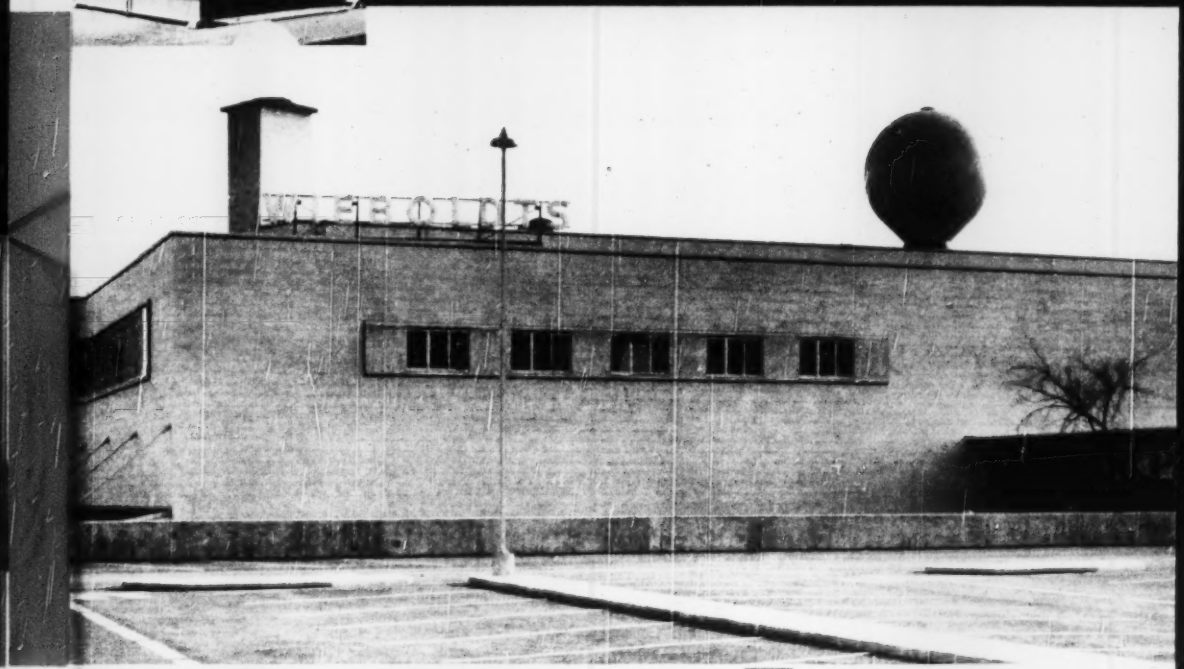

WATERSPHERE Provides Gravity Pressure

The fire protection system in the new Evanston, Illinois branch of Wieboldt Stores, Incorporated, has *both* the features it needs—automatic sprinklers *and* a water reserve stored in a Horton tank.

Here's why its good, common sense to have a reserve like this. Water flows from the tank under fool-proof gravity pressure the *instant* a sprinkler head opens. The flames are extinguished before they can reduce your building to a shell of twisted girders framing a gutted interior.

Wieboldt's—one of the Chicago area's largest merchandising chains—values this complete protection so highly that they "wouldn't think of building a store without it . . ."

When you make plans for fire protection, be sure to include a gravity water supply for the sprinklers. Write our nearest office for a quotation stating tank capacity required, height to bottom, location, and type of insurance you carry.

The Wieboldt Watersphere provides gravity pressure by holding a reserve of water above the building it protects. Where ground space is available, Waterspheres are usually erected as separate structures. Waterspheres are furnished in standard capacities from 25,000 to 150,000 gallons.

We also build ellipsoidal-bottom elevated tanks for industrial and commercial fire protection systems in standard capacities from 15,000 to 500,000 gallons. They are usually erected as part of a separate structure. Contact our nearest office for information about the type of tank you need.

CHICAGO BRIDGE & IRON COMPANY

Atlanta, 3	2125 Healey Building	Detroit, 26	1506 Lafayette Building	Philadelphia, 3	1623—1700 Walnut Street Building
Birmingham, 1	1520 North 50th Street	Houston, 2	2109 National Standard Building	Salt Lake City, 4	512 West 17th South Street
Boston, 10	1012—201 Devonshire Street	Havana	402 Abreu Building	San Francisco, 11	1230—22 Battery St. Building
Chicago, 4	2101 McCormick Building	Los Angeles, 17	1511 General Petroleum Building	Seattle, 1	1312 Stuart Building
Cleveland, 15	2201 Guildhall Building	New York, 6	3311—165 Broadway Building	Tulsa, 3	1617 Hunt Building

Plants in BIRMINGHAM, CHICAGO, SALT LAKE CITY, and GREENVILLE, PA. In Canada: HORTON STEEL WORKS, Limited, FORT ERIE, ONT.

Need a new building?

Get exactly what you want—when you want it —at lowest possible cost!

with Standard Buildings by Luria



This Port of New York Authority marine cargo terminal building at Port Newark (interior shown above) consists of five 40-foot Luria units in multiple, each 460 feet long — providing a total of 92,000 square feet of floor space.



This large fertilizer plant shows how the specialized requirements of a specific industry can easily be met with simple adaptations of Luria Standard Buildings.

A large telephone company found that this Luria Standard Building, with masonry walls and corrugated steel roofing, met all their requirements for a low-cost service garage.

No matter how special your building requirements may be, chances are they're *standard* with Luria. For Luria Buildings have been designed to permit far greater *flexibility* than has ever before been available from a standard line. In fact, they can easily be adapted to practically *any type* of single-story structure.

This means that you can have all the cost-saving, time-saving *advantages* of standardization, without the usual limitations. Luria Buildings are already engineered for you — made from standard members, produced by cost-cutting, mass-production methods. There is no sacrifice of quality in any detail. Luria Buildings are rugged, permanent, heavy steel-frame structures designed to meet the most exacting building codes. Furthermore, they're *available now* — many sizes carried in stock, ready for prompt delivery to your building site.

For complete information, send in the coupon below.

Standard Buildings by LURIA

LURIA ENGINEERING CORPORATION
500 Fifth Ave., New York 18, N.Y. Dept. E 56

Gentlemen: Please send me a copy of your new catalog on Standard Buildings.

NAME .....

COMPANY .....

ADDRESS .....

CITY ..... STATE .....

ENGINEER'S FILE ON HYDROGRAPHIC INSTRUMENTS

STEVENS
HYDROGRAPHIC INSTRUMENTS

A wide range of precision measuring instruments to record and indicate head, flow, and totalize flow; for waterworks, sewerage, irrigation and industrial uses. New, low cost methods of liquid level recording.

These methods and instruments for all liquid measuring problems are listed in a complete Engineer's Data folder for your convenience. This information folder is *FREE* and can be had by filling in the coupon below. The folder includes data on instruments to record fluctuations of liquids in oil production, stream gaging, deep wells, sewage, irrigation, etc., both accurately and economically.

STAFF GAGES



An inexpensive, dependable means of measuring liquid levels. They are designed so as not to affect the flow of liquid. Porcelain enameled for easier reading . . . accurately graduated in English or metric system . . . will not rust or discolor. Staff gages are available in a wide range of lengths and widths — Staff gages for as little as $1.00. Complete information in the Engineer's Data Folder.

Leupold and Stevens pioneered the field of water level recording 43 years ago, and since then have developed precision measuring instruments of all types and descriptions to meet many specific needs.

Write for the complete file. There may be a measuring device that exactly suits your specific requirements. Use the coupon below.

Please send me the Engineer's Data Folder with complete information on Hydrographic instruments.

Name _____

Address _____

City _____ State _____

LEUPOLD & STEVENS INSTRUMENTS, INC.
4445 N.E. Glisan • Portland 13, Oregon

ENGINEERING NEWS-RECORD

Volume 144 MAY 4, 1950 No. 18

WALDO G. BOWMAN
Editor

FEATURES IN THIS ISSUE

Cheap Repairs for Damaged Bridges 32
Flat-Slab Design Speeds Construction 34
Will My Blasting Damage Property? 36
Graphic Method for Widening Channels at Bends. T. G. Thorgeson 38
Print Machine Speeds Road Planning 39
The Volumeter 40
Machine Lining Applied to Large Pipe 41
Experiment With Wood Reinforcing Bars 42
Office Employee Parking 43
Perspective—"... And Damned if You Don't" 124

DEPARTMENTS

Construction Week 17
Scoreboard 19
Editorials 21
News of the Week 25
Notes on Legal Decisions 44
Field and Office 45
Reader Comment 46
Developments Ahead 50
Municipal Affairs 54
Men and Jobs 57
Education and Research 60
Election and Activities 65
Obituaries 66
Material Prices 70
Construction Reports 78
New Products 108

Number of copies of this issue printed: 45,834

Managing Editor Elmore D. Hollings, Jr.

Associate Editors New York: A. T. Baughman (on leave) and associates; J. C. Bransford, E. H. Boddie, R. N. Larkins, E. S. Merritt, Cleveland; J. R. Carr, San Francisco; S. A. Bowers, L. E. Wise, Washington; V. B. Smith.

Assistant Editors New York: Melvin Dean, Arthur J. Fox, Jr., T. D. MacGregor.

Staff Assistants Ruth Becker, Roderick; Ethel Lyon, Makeup; Henry Lebr, Production; Debi Pratt Zajac, Louise Barker, Ruth McCarthy, Madaleine Smith, Editorial.

Business News Elsie Eude, Manager; F. M. Huber, Jane Lucke, J. A. Mahoney, Frederick Lee Moore, Jr., M. W. Rowland, M. Weindel.

Contributing Editor Edward A. Cleary.

Domestic News Bureau Atlanta, Chicago, Cleveland, Detroit, Houston, Los Angeles, San Francisco, Washington. Correspondents in 43 cities in the United States, Canada and Mexico.

Foreign News Bureaus London, Frankfurt, Paris, Moscow, Tokyo, Bombay, Melbourne, Rio de Janeiro, Mexico City. Correspondents in Athens, Beirut, Caracas, Buenos Aires, Santiago, Shanghai, Zurich, Johannesburg and 40 other cities.

Member ABP Member ABP

HOWARD F. BOSEN
Publisher

May 4, 1950 ENGINEERING NEWS-RECORD Vol. 144—No. 18

Publication Office 99-129 N. Broadway, Albany 1, N. Y.
Executive and Editorial Offices 330 West 42nd St., New York 36, N. Y.

Copyright 1950 by McGraw-Hill Publications Co. The Accuracy Standard. Published every Thursday by McGraw-Hill Publishing Co. Inc. James H. McGraw (1860-1948), Founder. CURTIS W. McGRAW, President and Treasurer. WILLIAM CHEVALIER, Executive Vice President. JOSEPH A. GERARDI, Secretary and Vice President. EARL MONTGOMERY, Senior Vice President. Publication Director. NELSON BOND, Vice President. JAMES H. McGRAW, JR., Vice President. J. E. BLACKBURN, JR., Vice President and Director of Circulation. Member, Audit Bureau of Circulations. McGraw-Hill Building, 330 West 42nd St., New York 36, N. Y.

Subscriptions to ENGINEERING NEWS-RECORD are solicited only from those engaged in the design, construction, or management of engineering projects. Position and company connection must be indicated on subscription orders. Subscription rates: U. S. and Possessions, Canada, Mexico, Central and South America, $10 a year; $20 for 3 years. Other countries, $20 a year; $40 for 3 years. Single copies, 35 cents. Entered as second class matter at Albany, N. Y., under Act of March 3, 1879. Printed in U. S. A.

It's Your Cost-Cutting Combination!

Here's how to really step up the usefulness and profit-making ability of your Oliver Wheel Tractor-Loader. Simply add an Oliver Hydraulic Mower and you get a cost-cutting combination that will be busy virtually all year round. You can install the mower quickly and easily for those few days or weeks of work per mowing month . . . pull it off for the regular run of loading jobs. It's the ideal combination to cut your operating costs.

This powerful mower fits right into your tractor-loader. Cutter bar is driven by the hydraulic pump of the loader so no separate power units are required. Mower will cut anything from thick matted grass to moderate brush—in fact, almost anything that will pass between the knife guards. Hydraulic safety mechanism practically eliminates knife damage. Operator can cut right up to an obstruction . . . hydraulically raise the cutter bar to clear the obstruction . . . go right on mowing.

For all the facts on this cost-cutting combination that gives you year-round work with a tractor-loader-mower economically, see your Oliver Distributor or write us direct.

THE **OLIVER** CORPORATION

Industrial Division: 19300 Euclid Avenue, Cleveland 17, Ohio

A complete line of Industrial Wheel and Crawler Tractors

PRESSURE TREATED **AMCRECO** CREOSOTED PRODUCTS

PROTECT THE DANGER LINE!

Here's enduring protection at the ground line . . . where the greatest danger exists. Amcreco Creosoted Products, made from selected timber chosen to withstand heavy, severe driving, are pressure treated by the Lowry Process, refined and improved by Amcreco research, to assure maximum strength. For every job, Amcreco's advanced treating techniques assure longer service life and low maintenance. Take advantage of Amcreco's experience on your next job . . our engineers will gladly work with you.

TIMBERS • PILES • PLANKING

FRAMED BRIDGE TIMBERS

POLES • CROSS ARMS • CONDUIT

ADZED AND BORED CROSS TIES

BRIDGE TIES

Pressure treated by the Lowry Process for strength that lasts!

AMERICAN CREOSOTING COMPANY

INCORPORATED

COLONIAL CREOSOTING COMPANY

GEORGIA CREOSOTING COMPANY

LOUISVILLE KENTUCKY

MURPHY DIESEL

blankets the nation

SALES . . PARTS . . SERVICE



MURPHY DIESEL DEALERS, strategically and conveniently located throughout the United States, are ready to assist you. Backing these dealers are direct factory sales engineers located in the field whose sole purpose it is to aid the dealers in serving you. This complete field organization is fully qualified to help analyze and handle your complete power requirements promptly and efficiently. This is another of the many good reasons for using Murphy Diesel power.

Further, Murphy Diesel simplicity of design and rugged, heavy duty construction means—

More Power — Greater Dependability
Greater Economy — Longer Life

Get acquainted with your Murphy Diesel Dealer, now, and let him show you how Murphy Diesels can deliver more horsepower for fewer dollars. If you do not know your dealer's name, we'll be happy to send it to you.

MURPHY DIESEL COMPANY
5311 W. Burnham St. Milwaukee 14, Wis.

MURPHY DIESEL

Heavy duty power
for all services

Murphy Diesel engines and power units are made in sizes from 90 to 220 H. P.; generator sets from 60 to 133 K. W.

PAY LOADS THAT PAY OFF

Quick, big, constant loads . . . they spell **Speed, Volume, Production**. And it's the tractor that plays the biggest part in the pay-off. You get the very tops in results when you sign up the *power, capacity,* and *dependability* that "Caterpillar" Diesel Tractors offer—the kind you see working on the state highway construction project pictured and described above.★

Says Contractor O. D. Cowart: "From my experience, 'Caterpillar' Diesel Tractors are unbeatable. Their ability to take punishment with a minimum of repairs makes them unquestionably the leader in the construction field."

That's putting it broadly. It's *sustained slugging power* that counts. Like the prize fighter who can stay on his feet round after round, it's the tractor which day after day can "take it and give it" that's the real profit-maker in the long run. "Caterpillar" Diesel Tractors are made of that kind of stuff. They're tough! They don't need "long counts" (down time). They're quick on the comeback . . . should a new part or fix-up be in order, there's an efficient and quick-acting dealer service standing by. "Caterpillar" leaves nothing undone toward building—and keeping—60-second minutes, 60-minute hours, 24-hour days of *fighting performance* into every unit that bears its name. *Ask your "Caterpillar" dealer for the proof—in mechanical evidence, in user experiences, in demonstrations.*

★ **New Mexico**, near Silver City. Two "Caterpillar" D8 Tractors push-and-pull-loading a "Caterpillar" No. 80 Scraper with 11½ yards of tough rock in a trifle over a minute—thanks to matched equipment and 130 horsest drawbar horsepower. On 800-ft. one-way hauls the hauling team averaged 8 trips and 90 pay yards an hour. Total excavation (5.6 miles) 130,000 yards—about 60% rock. Two other "Caterpillar" Diesel Tractors, with Scrapers and Bulldozers, were also used on this work.

CATERPILLAR TRACTOR CO. • PEORIA, ILLINOIS

LOOK UNDER THE HIDE *for the qualities that pay off in tractor performance and long life . . . you'll find them in every "Caterpillar" detail. For example:*

Hard Chrome-Faced Compression Rings are standard on all models of "Caterpillar" Diesel Tractor Engines —increasing life and performance at critical point of engine design.



Alloy Iron Wet Type Cylinder Liners are "Hi-Electro" hardened — giving exceptionally long life. Wearing surface is chemically treated for proper break-in.

Solid Aluminum Alloy Connecting Rod and Main Bearings are exclusively "Caterpillar." Advantages: low rate of wear; fine heat-transfer characteristics; high corrosion resistance.

Air-Cooled "Lube" Oil. Air cooling lowers oil temperatures — reducing carbon, minimizing gum formations, and adding to the efficient serviceable life of working parts.



Independent Starting Engine of exclusive "Caterpillar" design gives safe-and-sure starts at all times, and allows the Diesel to build up full oil pressure before starting.



"Caterpillar"-Built Fuel Injection System is perfectly matched for "Cat" Engines. Pumps and valves require no adjustments, and are replaceable in the field—like spark plugs.

Tapered Splines—specially developed by "Caterpillar"— lock sprockets securely to shafts. So effective have they proved that the principle is similarly applied to other vital parts.

"Hi-Electro" Hardened Final Drive Gears. Teeth are three times harder after treatment and gear life is further boosted by the favorable compressive stress this process supplies.



Bellows Seals are self-aligning, self-adjusting and self-lubricating—keep oil in, dirt and water out without need for take-up adjustment or periodic attention.

Correct Track Alignment, both vertically and laterally, is assured with this rigid roller frame. Heavy diagonal brace and widely spaced bearings add life to tracks and rollers.



Counterbored Track Links — to provide a tighter, better sealed joint and greater bearing surface between bushings and track pins. Extra assurance of long life in abrasive soils!

Hour Meter to give user the facts on tractor performance and life. Hour meters have always been standard on "Cat" Engines because "Caterpillar" has nothing to hide.

CATERPILLAR

DIESEL ENGINES · TRACTORS · MOTOR GRADERS

EARTHMOVING EQUIPMENT

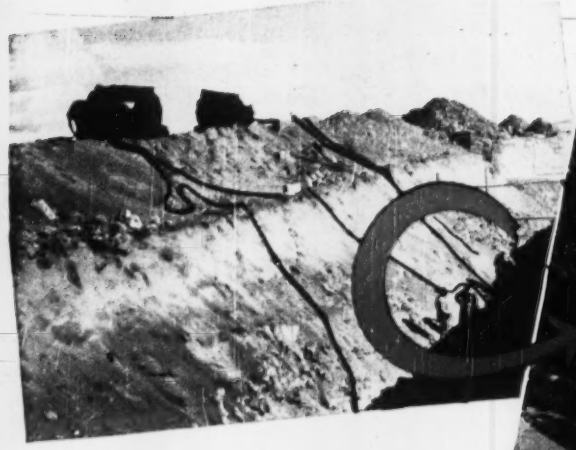

REPORT FROM OREGON: *"SPLENDID PERFORMANCE"*

Blue Brute team-mates — three of a battery of WJ-45 Rock Drills, powered by Portable Air Compressors — used by the Del R. Beebe Construction Co. of Eugene, Oregon, excavating for a big housing project's sewerage system. The Beebe Co. reports "splendid performance" in every detail of Blue Brute operation.

Oregon and Ohio Agree: BLUE BRUTE AIR TOOLS ARE TOP COST-CUTTERS!

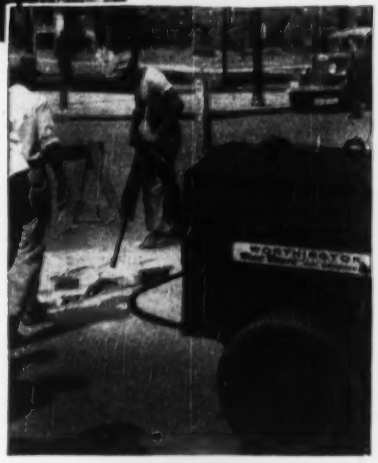

REPORT FROM OHIO: *"VERY MUCH PLEASED"*

A Blue Brute construction team in Toledo, Ohio, removing street paving. Owner John V. Rush of Toledo says: "Our WB-85 Paving Breakers and 50 Portable Compressors make ideal combinations. In four months' continuous operation, removing and replacing 6" and 8" concrete base, *we have had absolutely no maintenance trouble on this equipment.* We are very much pleased with it."

Put Blue Brute teams to work for you — and count on big savings from then on! Starting with Blue Brute Portable Compressors — 60% to 500% — you've got the most dependable and economical air suppliers ever made — tireless, trouble-free performers, with the easy breathing Feather* Valves that get *all* the air out of every drop of fuel.

Then hook up their famous Blue Brute team mates — Hand Held Rock Drills, Clay and Trench Diggers, Tampers, Sheeting Drivers, Wagon Drills — and you're making air go farther and do more than it ever did before. That's because these Worthington air tools not only hit harder and last longer — they have the lightness, compactness and *precision balance* that means easier handling — faster, smoother progress — hours and dollars saved on every job.

Learn how Blue Brute teamwork can save you time and money. See your nearby Blue Brute Distributor for more reasons why *there's more worth in a Blue Brute*, or write us direct.

*Reg. U. S. Pat. Off.

WORTHINGTON

WORTHINGTON PUMP AND MACHINERY CORPORATION
Construction Equipment Department, Harrison, New Jersey
Distributors in all principal cities

BUY BLUE BRUTES

IF IT'S A CONSTRUCTION JOB, IT'S A BLUE BRUTE JOB

NEWS BRIEFS

Neat Budgeting—Georgia's Gov. Herman Talmadge wants to repeal state property taxes which bring in $6,700,000 and up highway spending $20,000,000. He wants a constitutional amendment which would allocate motor revenues to the highway department, reversing a 7-year-old state practice. The proposal, which will go to the legislature in January, would raise highway funds from today's $30,000,000 to $50,000,000 yearly.

Boston Buys Belgian—Some Boston builders discovered they can buy Belgian nails for $7.50 a keg. Domestic nails selling for $9, foreign nails are coming in by the boatload.

Any Color but Red—Ontario's highway department is considering coloring the salt it strews on highways each winter. That's so motorists will know the department's been on the job. "It's very discouraging," Deputy Minister J. D. Millare said, "after a hard night's work to receive complaints of unsalted highways. We are seriously considering coloring it green or something so that it will show up." The department used 50,000 tons last year.

Make 'em and Break 'em—Contractors on Georgia's Clark Hill Dam set a new concrete pouring record in February, proceeded to break it substantially in March, when they placed 95,000 cu yd on a three-shift, five-day basis.

New Roadbuilders—Gov. John W. Bonner, of Montana, has appointed Nels N. Bach, rancher; John R. Graham, businessman, and Harry Soderberg, mayor of Havre, to the state highway commission, replacing three members who resigned. (ENR April 27, p 26).

Building for Trade—British Columbia has undertaken a two-year, $5,000,000 program of wharf construction and harbor improvement. About $3,000,000 is earmarked for new wharves and breakwaters at Vancouver Island and along the coast. There's $1,230,000 for a new jetty being built at the mouth of the Fraser River. The remainder is for Fraser River and Vancouver harbor improvements.

Jobs for Juniors—U. S. Civil Service Commission will hold examinations soon for positions as engineering aide in the Reclamation Bureau's Region 6. Paying from $2,200 to $2,875, the jobs will be concerned with [illegible]

(Continued on page 12)

Announcing THE New UNIT 614 ½ Yd.

a HEAVIER and BETTER machine ...at no increase in price!

Sturdy, box section side members . . . Cast steel hinges . . . Single, square structural steel dipper stick . . . Cast steel saddle block with adjustable and replaceable wear plates . . . Direct UNIT chain-crowd mechanism — eliminates cables, racks, and pinions . . . Special equalizer insures even pull on both strands of the double crowd chain.

Twin hook-rollers equalized and mounted on front and rear of rotating frame. Quickly adjusted by means of eccentric pin. 4 upper-load rollers and 4 hook-rollers — all conical shaped and made of drop-forged steel.

The completely new UNIT 614 — ½ yard offers the same rugged construction usually found only in machines of greater capacity. Twenty-five years of engineering skill and craftsmanship have gone into the production of this model — an outstanding product resulting from specializing in sizes under one yard. Compare its construction features and design with any ½ yard machine in the market today. We are confident that your judgment will favor the UNIT 614.

Get the facts — Write today for literature.

UNIT CRANE & SHOVEL CORP.
6315 W. Burnham Street • Milwaukee 14, Wisconsin, U. S. A.

SHOVELS • DRAGLINES • CLAMSHELLS
CRANES • TRENCHOES • MAGNETS

ELLICOTT

DREDGES ANY TYPE ANY SIZE ANY SERVICE

Only Ellicott offers: **65 years of experience** in dredge building; a **complete line** in all sizes; **undivided responsibility** — your dredge is designed, built and delivered under *one* contract.

Write for catalog: **ELLICOTT MACHINE CORPORATION**
1603 Bush St., Baltimore 30, Md.

Meet The BIG

Matched for Championship Dirt Moving

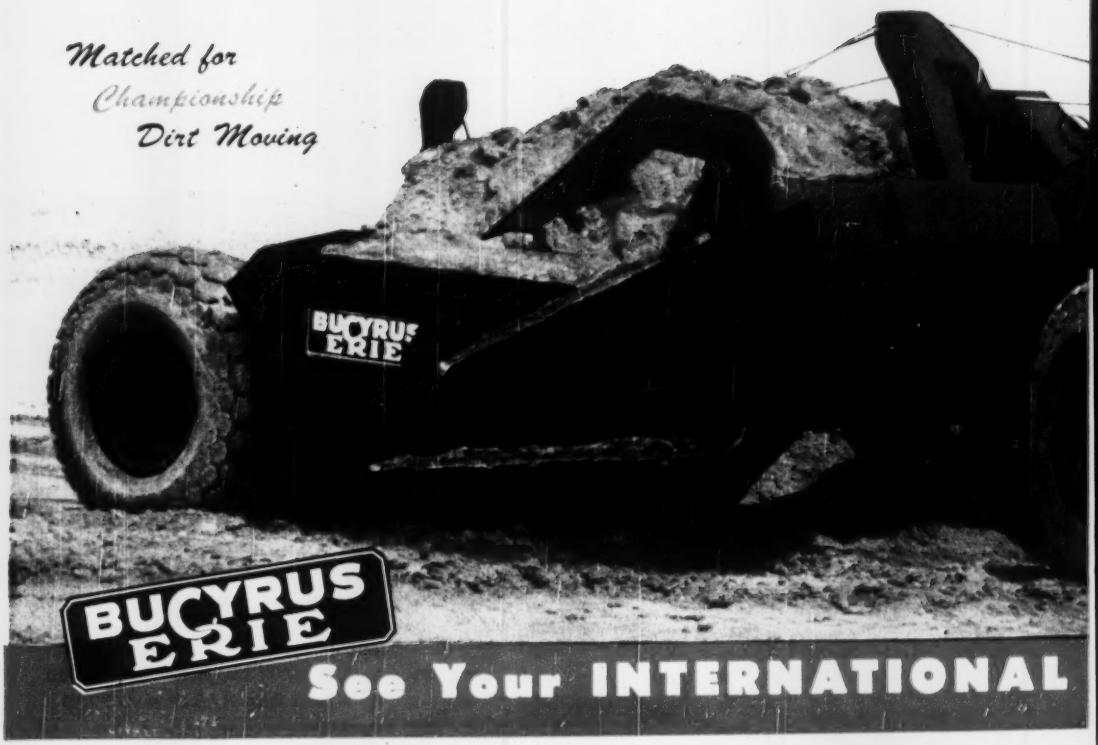

BUCYRUS ERIE

See Your INTERNATIONAL

RED' Team

Get acquainted with the combination that's matched for championship dirt moving: the "BIG RED" team — new International TD-24 tractor and Bucyrus-Erie B-type scraper. Owners are proving its superior performance on earthmoving jobs everywhere . . . are completely revising accepted time cycles for crawler tractor-scraper combinations.

Look over this team of matched equipment. See for yourself what the "BIG RED" team can do to cut your dirt costs. The tractor is the most powerful in the world; it is built by the largest company manufacturing crawler tractors. The scraper takes full advantage of tractor power, is built by the world's largest and oldest manufacturer of earthmoving equipment. This unequalled experience means sound design, money-making "BIG RED" performance!

184T50C

BUCYRUS-ERIE COMPANY, South Milwaukee, Wis.

Industrial Tractor Distributor

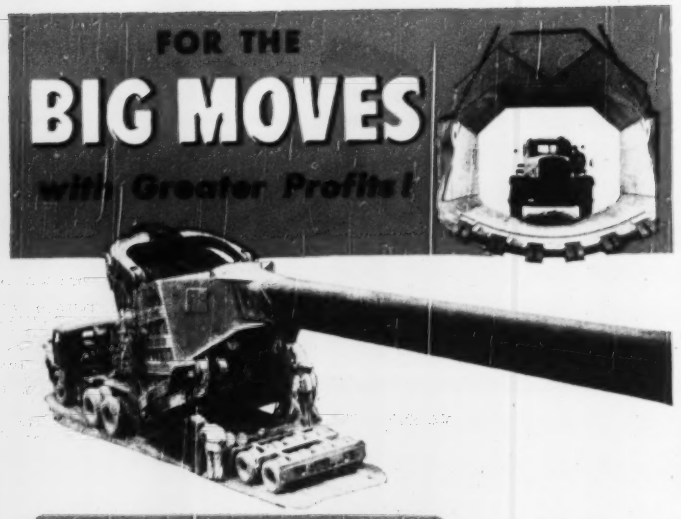

ROGERS TRAILERS

ROGERS BROTHERS CORPORATION
135 Orchard St.
ALBION, PA.

EXPERIENCE *builds 'em* PERFORMANCE *sells 'em* Since 1915

The successful movement of heavy, bulky machinery, such as these two moves made for the Hanna Coal Co., requires uncommon experience and the use of equipment basically engineered to handle these unusual operations.

At the right is shown a 55 cubic yard dipper (the largest in existance) which was moved from the Lukens Steel Co. of Coatesville, Penna., by A. Duie Pyle of that city, 300 miles to Adena, O., in five daylight periods.

The other exceptionally large dipper with "stick" was moved up and down grade, over macadam, gravel and dirt roads by Crane & Truck Service, Inc. of Pittsburgh, Penna., under the direction of J. C. Moran, Vice Pres. & Gen. Mgr. A Rogers D-80 D Trailer carried the dipper and a Rogers Pole Trailer supported the "stick". Being 152 feet long, it was necessary at times to remove fences and swing the pole trailer over into fields in making turns. A flat truck and Tournadozer controlled cables to balance the bucket on elevations.

Be guided by the judgment of experts. Investigate Rogers Trailers by all means.

Export Office: 50 Church St., New York 7, N. Y.
Cable Address: "Broscites"

HEAVY DUTY LOW BED TRAILERS IN VARIOUS TYPES AND SIZES FOR ALL PURPOSES

(Continued from page 9)

hensive plan for development of Missouri Basin water resources.

No Mud, Bud—Whoever builds a new bridge across the Patuxent River, at Benedict, Md., had better go easy on stirring up mud. That part of the river is a fine oyster bed, and mud disturbs the oysters, not to mention oystermen. At a conference between the state Roads Commission and the Fisheries Commission, it was agreed to dump dredged mud along the banks.

New York City, Please Copy—Tacoma, Wash., Municipal Water Division believes that one of its new wells is the biggest ever found in the Pacific Northwest. It's inside city limits and can produce almost 15,500,000 mgd.

Toll Road's Legal—Colorado's Supreme Court has ruled that a proposed toll road between Denver and Boulder is legal, and that the state may, if necessary, contribute up to 50 percent of its cost. Work will start in July on the $5,600,000 highway if rights-of-way can be acquired. Howard, Needles, Tammen and Bergendoff will handle the engineering.

Construction, Not Interstate—The Sixth U. S. Circuit Court says there was no interstate commerce involved in construction of the Kentucky Ordnance Works in 1942-45. It upheld a federal District Court which had ruled that the Rust Engineering Co. was not liable for $89,000 in back pay to 185 former employes who contended the money was due them for overtime under federal law.

THE COVER

Here's an aerial view of the Tanners Creek power plant of the Indiana Michigan Electric Co., on the Ohio River at Lawrenceburg, Ind. Started in September, 1948, it's to be operating next spring. Its cost with the first unit (150,000 kw net capability) will be about $18,000,000. As many as three units may be installed. The plant is one of two now under construction on the Ohio by subsidiaries of the American Gas & Electric Co. and contains one of six 150,000 kw turbo-generators being installed concurrently. AG&E does the engineering, design and construction supervision. George F. Hazelwood, Inc., of Cumberland, Md., has the heavy construction contract. The plant site is surrounded by a 40 ft dike. Foundations go down almost 40 ft more. There's been a variation of almost 60 ft between minimum and maximum river stages at the site.

WeldELLS®

The WeldELL line is a quality line in the fullest sense of the word. It is the expression of all that has been learned in a half century of continuous research and practical experience by an organization that has consistently shown the way in forging technique and closely-controlled metallurgy as related to piping design.

The quality line—the job-speeding, cost-cutting line—is also the *broadest* line. It includes practically every type of fitting, in every weight, every size and every material needed in pipe welding. Large stocks are carried in all industrial centers.

Mail coupon for new catalog covering WeldELLS and other Taylor Forge Welding Fittings.

TAYLOR FORGE

Taylor Spiral Pipe is again promptly available in a broader range of sizes and thicknesses. Coupon brings pipe bulletin.

TAYLOR FORGE & PIPE WORKS
P. O. Box 485, Chicago 90, Illinois
Offices in all principal cities. *Eastern Plant:* Carnegie, Pa. *Western Plant:* Fontana, Calif.

☐ Please send new Catalog 484 covering welding fittings and forged steel flanges.
☐ Send new Bulletin 493 covering Taylor Spiral Pipe and related fittings.

NAME_____
POSITION_____
COMPANY_____
STREET ADDRESS_____
CITY_____ ZONE____ STATE_____

614-0550 Mail to Taylor Forge & Pipe Works, P. O. Box 485, Chicago 90, Ill.

Central Office Building, Board of Transportation of the City of New York, 370-380 Jay Street, Brooklyn, N. Y.
Contractor: Grove, Shepherd, Wilson & Kruge, Inc., New York City.
Ready Mixed Concrete: Cranford Materials Corporation, Brooklyn, N. Y.

Lehigh
CEMENTS

Important savings . . . all along the line . . . with **LEHIGH EARLY STRENGTH CEMENT**

Careful planning and the right material paid off in the erection of the Central Office Building for New York City's Board of Transportation.

To cut the extra costs of winter concrete construction, Grove, Shepherd, Wilson & Kruge stepped up their schedule for the floors with Lehigh Early Strength Cement . . . reduced the construction period by more than one half . . . *with these important savings:*

- 3 months of unproductive overhead
- 75% of estimated cost of winter weather protection
- $12,500 in form costs

On practically every type of construction you can save *all along the line* by the timely use of Lehigh Early Strength Cement.

Whatever your cement requirements, there are Lehigh Cements to fit them. Our Service Department will be glad to help you with any specific problem.

LEHIGH PORTLAND CEMENT COMPANY • ALLENTOWN, PA. • CHICAGO, ILL. • SPOKANE, WASH.

LEHIGH PORTLAND CEMENT • LEHIGH EARLY STRENGTH CEMENT
LEHIGH AIR-ENTRAINING CEMENT • LEHIGH MORTAR CEMENT

C TOURNAPULLS average over 4,700 pay yards per day on 650' haul

Moss Construction Co. ordered additional Tournapull as result of experience on 160,000-yard airport job

Moss Construction Company of Paris, Illinois, brought in two C Tournapulls to handle 100% leveling job at Logan County Airport near Lincoln, Illinois. Project called for grading 160,000-yard airport site preparatory to paving. Cuts and fills were scattered over entire area . . . with one-way hauls ranging anywhere from 50 to 1000′ Because of the project's sprawling nature, no haul roads were established. Despite the scattered cuts and fills and lack of haul routes, the two "C's" chalked up the following production performance.

Moved ½ total yardage in first 17 days

Working in topsoil and clay on average 650′ one-way hauls, Moss Construction Company's production figures showed the two C Tournapulls moved 80,000 yards in the first 17 working days! That's an average of over 4,700 yards per 10-hour day. Even in wet going the "C's" delivered consistently. Checked by Mr. Moss after a heavy rainfall, the two C Tournapulls moved 1,450 pay yards of wet clay in just 3 hours . . . had the 6-week job 50% completed in the first 17 working days.

Drove 233 miles in 12 hours

When Moss Construction Company got this airport job, they drove the two rubber-tired "C's" over highways under their own power from Benton, Ill. Covered a distance of 233 miles in 12 hours. On basis of this typically outstanding all-around performance, Moss has ordered another C Tournapull. "Finest piece of dirtmoving equipment I ever used," is the way Contractor Moss put it.

You, too, will find these same Tournapull production advantages are available for your jobs — large or small. Let your LeTourneau Distributor *PROVE TO YOU* how you can get a NEW lowest-net-cost-per-yard on your earthmoving jobs. Let him show you the top profit possibilities available with high-speed, rubber-tired, electric-control Tournapulls and Tournadozers.

LETOURNEAU PEORIA, ILLINOIS — JOB-PROVED from $400 built and shipped — TOURNAPULLS

MORE YARDS PER HOUR WITH RUBBER-TIRED POWER

Reduce operating costs for lower bids...

Low bids are mighty important as long as you retain enough profit. Many experienced contractors have found they can accomplish both by taking advantage of the savings made possible with Armco Corrugated Metal Structures.

Figured on an *installed* basis, Armco Structures save time, labor and money in many ways. They often weigh only one-tenth as much as more massive types, yet are amply strong for the purpose. This means low handling and hauling costs. Job costs go down because unskilled labor quickly makes the installation.

Standard Armco Pipe and PIPE-ARCH are supplied in any length that can be hauled or handled, while larger MULTI-PLATE Pipe, Arches or PIPE-ARCH are shipped knocked-down. No large and expensive equipment is needed for installation. A few men with a rope sling or an A-frame can handle the largest structure.

Assembly is made with simple band couplers, or by bolting prefabricated sections together. No hand excavation is required—no delay for formwork or curing and no backtracking to finish the job. Backfilling is done directly against the metal and traffic rolls immediately.

Bid low with good profit by figuring that next job with an Armco Corrugated Metal Structure. All are ideal for highway, railway, airport and municipal installations. Write for complete data. Armco Drainage & Metal Products, Inc., 3330 Curtis Street, Middletown, Ohio. Subsidiary of Armco Steel Corporation.

Export: The Armco International Corporation

ARMCO DRAINAGE STRUCTURES ARMCO

Bids 26% lower

Experienced contractors figure the time, labor, and money-saving advantages of Armco Corrugated Metal Structures into their bids. On drainage work for a southern highway the winning contractor was able to bid 26% lower for Armco MULTI-PLATE PIPE-ARCH than competing bids for a monolithic box structure.

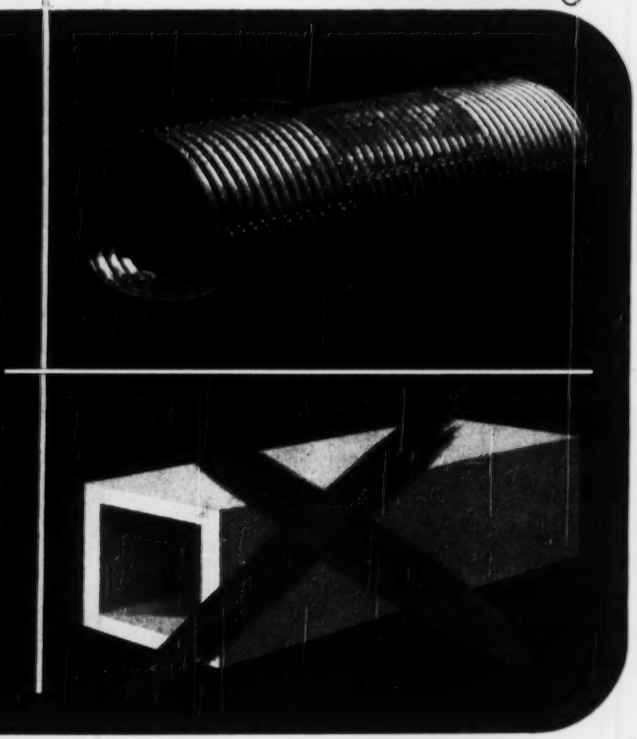

THE CONSTRUCTION WEEK

HOLD THAT CUT-OFF DATE!—Homebuilders are up in arms over intimations from the Veterans Administration that it may terminate combination FHA-VA mortgage loans before Dec. 31 (final cut-off date set by the 1950 Housing Act). The law gives VA Administrator Carl Gray power to end the combination loan arrangement before the cut-off date, if he chooses. Some builders say the combination loans are financing half of current home sales to ex-GI's.

RUSH THOSE MINIMUMS—Within 90 days (by June 19) VA must adopt minimum house construction standards similar to those of FHA. Up to now, housing standards could be enforced by VA only on request of the ex-GI home buyer. And in the same 90 days following the signing of the 1950 Housing Act, VA must set up its direct-lending program (financed with $150 million under the new law). The act says that ex-GI's must have exhausted all other means of financing home purchases—but then can get direct loans from Uncle Sam.

PREFAB FLOP—Reconstruction Finance Corp's recent flyer into the prefab housing business is now an officially admitted failure. Negotiations to sell Lustron Corp., after RFC foreclosed its $37,500,000 investment there (ENR Feb. 23, p 27) have fallen through, and now RFC is out to salvage what it can through sale of assets. Observers say that if RFC can salvage $10,000,000, the taxpayers will be lucky.

WAIT AND SEE—President Truman is waiting until Congress clears his 21 initial reorganization proposals (submitted in March) before he sends another set to the Hill. Six of the March proposals are under fire in Congress now, with one—to put the Comptroller of Currency directly under the Secretary of the Treasury—seen as a sure loser. White House advisers are still debating transfer of RFC to Commerce or Treasury, and of Army civil functions to Interior.

SEAWAY OFFENSIVE—Administration big guns let loose powerful salvos in favor of the St. Lawrence Seaway and power project, as the House Public Works Committee began hearings on HJ Res 271 (approval of a U. S.-Canada agreement). Commerce Secretary Sawyer led off with testimony on both the economic and defense aspects of the scheme. The latter was bolstered by a special report of the National Security Resources Board, which sees advantages in the proposed waterway. Secretary of State Acheson followed with a plea for the $800 million development as an aid to national defense. But Washingtonians think it will take more pressure than the administration can muster to force approval at this session of Congress.

BOOM GOES ON—Canada's current building boom will continue through 1950, if government experts are right. C. D. Howe, trade and commerce minister, told Parliament that on the basis of annual reviews of investment and building materials supplies, Canadian construction volume will reach $2.3 billion—an increase of 12 percent over 1949.

DIVIDING THE WATERS—At least one bar to authorization of more reclamation projects in the Canadian River Basin (Oklahoma, Texas, New Mexico) was cleared by Congressional action when Congress ok'd negotiation of a compact to apportion the Canadian's waters. Now the Senate Interior Committee is talking over a House-passed bill to authorize the first project, in the Texas panhandle.

SF SUBWAY?—San Francisco's Mayor Elmer Robinson will ask voters in November to approve a $50,000,000 bond issue as a starter on a $130,000,000 subway system for the city. Long discussed, first stage of the project would be a two-track line under Market Street from the Bay Bridge terminal, through a couple of tunnels to 19th Ave. and Lincoln Way. Later additions would take the line to the Presidio and other outlying areas.

EAST AND WEST MEET—IN SEATTLE—Two major water crossings, east and west from Seattle, across Lake Washington to the east and Puget Sound to the west, are under serious survey. The Washington Highway Department disclosed that a survey of March traffic on the floating bridge across Lake Washington was within 2,000 vehicles of its saturation point, even though an earlier survey had indicated that a second such bridge, or tunnel, would not be feasible until 1955 or 1960, when the first would be used to capacity. To the west, survey crews report "excellent progress" on a survey for the Washington Toll Bridge Authority of a proposal for a bridge or tubes to the Kitsap peninsula, across Puget Sound. The legislature will be asked for another $400,000 to complete the planning if the proposal still looks valid next year. Charles Andrew, chief consulting engineer for the authority, says there'll be a complete report ready for the legislature next January.

You Don't Need to Keep your Fingers Crossed with Chlorination by W & T

Keeping fingers crossed over the dependability of chlorinating equipment is something that engineers who demand W&T Chlorinators can forget. They know they can forego the time honored symbol of hope-with-uncertainty and go on to other problems without worry or risk. Here's how they figure it.

W&T has a complete line of chlorinators and accessories for handling from ounces to tons of chlorine per day.

W&T has over 35 years' experience in solving all types of chlorination problems.

W&T has extensive research and development facilities to take on and solve new problems.

W&T has a large, precision machine shop which understands, from long experience, the exacting nature of chlorinator manufacturing.

W&T has a nationwide field staff to render service and technical assistance promptly and effectively.

Thus, the engineers who say "W&T Chlorinators" know they have experience, dependability and sound theory behind their decision.

You'll find your W&T Representative willing and helpful on *your* chlorination problems, too. Why not call on him for your next job—instead of crossing your fingers?

The W&T Residual Chlorine Recorder gives better chlorination control in old plants as well as new.

WALLACE & TIERNAN COMPANY, INC.

CHLORINE AND CHEMICAL CONTROL EQUIPMENT

NEWARK 1, NEW JERSEY • REPRESENTED IN PRINCIPAL CITIES

S-45

MAY CONSTRUCTION BUSINESS REPORT







ENR INDEXES (1913 = 100)	May '50	Apr. '50	% Change	May '49	% Change
Construction Cost	496.55	491.94	+0.9	472.10	+5.2
Building Cost	364.27	362.78	+0.4	348.92	+4.4
MATERIAL PRICES (20-cities' average)					
Cement, bulk, per bbl	2.961	2.961	0.0	2.990	−1.0
Structural Steel, (3-mill aver.), per cwt.	3.400	3.400	0.0	3.250	+4.6
Sand, per ton	1.968	1.973	−0.3	2.005	−1.8
Lumber, 2x4 Fir, per M ft. bm.	91.955	89.162	+3.1	86.329	+6.5
Lumber, 2x4 Pine, M ft. bm.	78.000	79.033	−1.3	74.080	+5.3
Common brick, per M	28.087	27.987	+0.4	27.769	+1.1
Ready-mixed concrete, per c. y.	10.267	10.313	−0.4	10.211	+0.5
Structural Clay Tile, 3x12x12 Per M	132.900	132.900	0.0	131.983	+0.7
WAGE RATES (20-cities' average)					
Common	1.511	1.493	+1.2	1.431	+5.6
Skilled (aver. 3 trades)	2.485	2.478	+0.3	2.384	+4.2
Bricklayers	2.756	2.739	+0.6	2.606	+5.8
Structural Ironworkers	2.450	2.447	+0.1	2.356	+4.0
Carpenters	2.249	2.247	+0.1	2.191	+2.6

	April		%	Four Months		%
CONTRACTS AWARDED (thous.)	1950	1949	Change	1950	1949	Change
Total U. S. (ENR reported)	$885,044	$589,693	+50	$3,480,193	$2,462,132	+41
Private	549,861	274,021	+100	2,613,361	1,221,797	+65
Public	335,183	315,672	+6	1,466,832	1,240,335	+18
Federal	55,741	49,669	+12	470,908	362,658	+30
ENR Constr. Volume Index, '13 = 100	387	268	+44	363	262	+39
NEW CONSTRUCTION CAPITAL						
Total	299,653	390,480	−23	1,406,765	1,658,886	−15
State & Municipal Bond Sales	147,219	158,506	−7	811,579	814,499	−0.4
Corporate Security Sales	152,434	231,974	−34	595,186	844,387	−30
Federal (non-federal work)	.....	.....	.....	.....	.....	.....
Federal (federal work)	.....	.....	.....	.....	.....	.....

MATERIAL SHIPMENTS & LABOR SUPPLY	March (M) or February (F) 1950	1949	% Change	Three Months or Two Months 1950	1949	% Change
Cement, thous. bbls., Bu. of Mines	9,775 (F)	9,434 (F)	+7	19,368 (2)	17,898 (2)	+8
Fabr. Struct. Steel, thous. tons, AISC	153 (M)	178 (M)	−14	416 (3)	479 (3)	−13
Lumber, mil. ft. bm., NLMA	2,365 (F)	1,938 (F)	+48	5,498 (2)	4,133 (2)	+33
Lumber Prod., mil. ft. bm., NLMA	2,463 (F)	2,049 (F)	+20	4,850 (2)	4,281 (2)	+13
Contract Const. Employ., thous. BLS	1,903 (M)	1,947 (M)	−2	1,892 (3)	1,963 (3)	−3.6

Every Homelite Product Is Always Better

THREE WAYS

THE HOMELITE GASOLINE-ENGINE-DRIVEN ONE MAN CHAIN SAW

1. PERFORMANCE

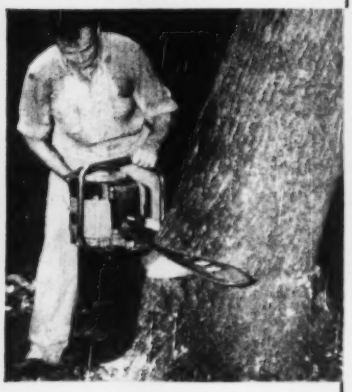

Typical of all Homelite products, the Homelite Gasoline-Engine-Driven Chain Saw handles like a feather, yet cuts faster and with less trouble — whether it's felling, bucking, notching or undercutting — than any other saw its size.

2. DEPENDABILITY



Typical, again, of all Homelite products, the Homelite One Man Chain Saw is powerfully driven by the time-proven famous Homelite gasoline engine — a simple, foolproof engine that is the exclusive result of Homelite's experience in building close to 300,000 gasoline engine-driven units.

3. SERVICE

In addition to all the low maintenance features of Homelite Chain Saws — the permasharp, chrome-plated chain, the lifetime gears and oil seals, and the automatic lubrication — Homelite service shops the country over bring trained mechanics almost to your door, to keep your Homelite Chain Saw right up to Homelite nation-known performance standards.

PERFORMANCE DEPENDABILITY SERVICE

Homelite Corporation

1105 RIVERDALE AVENUE, PORT CHESTER, NEW YORK

MANUFACTURERS OF HOMELITE CARRYABLE PUMPS • GENERATORS • BLOWERS • CHAIN SAWS • PAVING BREAKERS

STICK TO THE RULE OF THREE

1. **Performance**
2. **Dependability**
3. **Service . . . and you'll always stick to a Homelite**

Wanted: Better Flat-Slab Formulas

FLAT-SLAB reinforced concrete floors without drop panels and without capitals on the columns are probably the easiest type of floor to construct. For light loads and within a large range of column spacings, they are probably also the most economical—if building code provisions are not unduly restrictive.

Flat-slab design is based on empirical formulas specified by building codes. These formulas are necessary because theoretical analysis is inadequate due to the impossibility of accounting for plastic flow, deflection and catenary effects.

Formulas for bending moments and shears have had some experimental verification. They apparently give reasonable—though possibly inaccurate—results. For example, analysis of a flat-slab floor by six different methods, including that given in the Washington, D. C. code (p 34), gave about the same answers.

In most codes, however, formulas are given for minimum depth of slab, minimum percentages of reinforcing steel and minimum punching shear that are illogical and generally unduly restrictive.

For example, in the apartment house floor described on p 34, the slab was made the same depth in each bay to facilitate construction. Hence, it was thicker in some areas than needed to meet minimum code requirements. Yet, because of the added depth, the code called for more steel—based on a percentage of cross-sectional area of the slab—than needed for moment, shear or minimum depth.

Further tests on flat slabs are evidently necessary to enable more satisfactory formulas to be developed. A good place to start might be a study of formulas for minimum depth, steel and punching shear.

Checkmate: Temporary or Permanent?

THE OHIO RIVER Valley Water Sanitation Compact—holding high promise of effective pollution abatement by grass-roots cooperation in the U. S. heartland—was born nearly two years ago. Since then, its hard-driving commission and staff engineers have tackled their vastly complicated eleven-state problem. In the course of their efforts, they've built up a reputation for fairness, fact-finding and sensible step-by-step advancement. And cities as well as industries in the region are realizing it will be difficult to put off construction of treatment facilities much longer.

But now the very existence of the compact is threatened. The Supreme Court of West Virginia has declared that state's ratification of the compact unconstitutional. The 3-2 decision grew out of the state auditor's refusal to validate the West Virginia share of compact funds. Noteworthy are two points. The auditor authorized payment last year; the court's decision was based on the finding that the state legislature could not grant police powers in perpetuity to any state or interstate agency.

It's unfortunate that the court felt it must stand with the auditor on a legalism that may kill West Virginia's essential cooperation in this pioneering venture. The people of the state, through their representatives, agreed to participate jointly with neighboring states, and they stand to benefit greatly by cleaner waters.

With all respect for the court, it's also difficult to appreciate the basis for the decision. The compact specifically provides for interstate cooperation. It assigns to each state's commissioners the control of any policing action involving their state. This does not seem to be a delegation of police powers to an outside agency.

The sad part of the decision is the fact that Ohio and Pennsylvania participation is contingent upon that of West Virginia. If these key states are forced to withdraw, then it seems that the painfully erected compact must fall apart. This will leave a void into which the federal government—through its anti-pollution unit—will undoubtedly step—and promptly.

Fortunately, the West Virginia commissioners—backed up by legal experts of sister states—are not taking this setback lying down. They're preparing a request for a rehearing before the state court. If this fails, they plan to carry the case to the U. S. Supreme Court. The future of the ORVWSC is in delicate balance. And the people of the Ohio Valley can only hope that it will be permitted to continue its work at the state level with men in control who know the region's problems intimately.

Blasting and Public Relations

NEWSPAPER HEADLINES telling of people being injured and glass broken last week by blasting at the site of the United Nations headquarters in New York give special significance to the article on proper blasting practices for confined areas on p 36 of this issue. Not only does it tell the contractor how to select explosive loadings that won't damage buildings or injure people, but also places a valuable public relations tool in his hands. Armed with scientific data that prove he can do a safe blasting job, a contractor can go to property owners and give them a story that will tend to allay their fears of damage. This story also can forestall opportunistic lawsuits, and—if suits get to court—it will give the contractor a better defense.

Scientific selection of safe explosive loadings is in the interest of lower costs. Fewer adverse judgments will result in lower liability insurance rates for construction—a saving to be passed on to the owner.

JAEGER invites 5-way comparison with any other pumps

1 - Actual priming speed
2 - Vacuum, capacity and pressure
3 - Gallons of water moved per gallon of fuel
4 - Self-cleaning ability
5 - Hours of service per dollar invested

1½" and 2" Aluminum Pumps: 5100 and 9000 gph. Replaceable liners, stainless steel shell fittings.

Heavy Duty 2", 3", and 4" Portables. Also lighter utility models.

Slow-Speed, Long-Life 6", 8", 10" Pumps—Full capacity at 1450 rpm instead of usual 1800, for all dewatering service.

2" to 8" Pressure Pumps for jetting and supply pumping at higher heads.

See your Jaeger distributor or send for complete Catalog P-10.

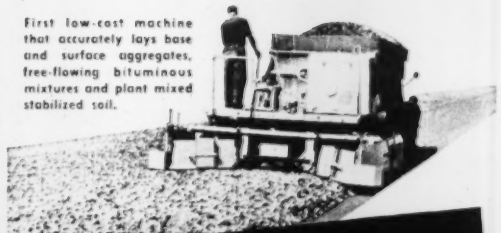

First low-cost machine that accurately lays base and surface aggregates, free-flowing bituminous mixtures and plant mixed stabilized soil.

IT'S HERE! Jaeger self-propelled aggregate spreader

Accurately Lays up to 10" Thickness, 8 to 12½ Ft. Widths: Four-wheel drive operates entirely on subgrade or compacted base—prevents displacement of newly laid material. Long straightedge runners carry screed independent of up-and-down machine motion, average out subgrade irregularities, positively maintain correct course thickness.

Quick Width Changes: 10' to 12½' by telescopic shaft, screed inserts. Block off for 8' to 10'.

Blends Perfect Joints Between Lanes with blender wings and side control gates. Saves hand work.

Tandem Spreaders Lay Full-Widths up to 25', Ready to Roll in One Operation: Two spreaders cost much less than one big bituminous paver, double your daily production of base, permit earlier application of top and keep your higher priced paver busy finishing top course—at tremendous savings to you. Send for Catalog SPS-9, giving complete details.

Jaeger Bituminous Paver "Teams" with Jaeger Spreader. America's most modern bituminous paver for high precision work—oscillating tilt-table screeds, almost instant width adjustability to 12½', positive automatic leveling. Can pave flush to curb, gutter or previous lane. Controls all traction and heavy load to subgrade. Ask for Catalog BP-9.



THE JAEGER MACHINE COMPANY

Columbus 16, Ohio—Cable Biganlitle

Leading distributors in 130 cities of the United States and Canada sell, rent and service Jaeger Engineered Equipment

PUMPS • AIR COMPRESSORS • MIXERS • HOISTS • TOWERS
BITUMINOUS PAVERS • CONCRETE SPREADERS AND FINISHERS

ENGINEERING NEWS-RECORD

MAY 4, 1950 VOL. 144 NO. 18

Water, soil and freeways top subjects at ASCE meet

Society holds spring meeting at Los Angeles—All but one technical division sponsors sessions at which 85 papers were presented—Much attention paid to water problems

Waldo G. Bowman
Editor, ENR

Colossal, a word not infrequently associated with events originating in California, may properly be applied to the spring meeting of the American Society of Civil Engineers at Los Angeles last week.

Beginning Wednesday morning (April 26), four to five technical sessions, sponsored by 12 of the society's 13 technical divisions, were usually under way simultaneously. Three days —and a half million words—later, a multitude of civil engineering facts had been placed on the record. A total of 1,380 registered for the convention, for which Ray L. Derby, sanitary engineer, Los Angeles Department of Water and Power, was general chairman. Robert R. Shoemaker, chief harbor engineer, Long Beach Harbor Department, is president of the Los Angeles Section of the society, which arranged the meeting.

Among the features of the technical sessions was an all-day symposium on the subsidence problem in the Los Angeles-Long Beach area; a series of papers on the construction of the "man-made rivers of the west," including both canals and the development of the Colorado and San Joaquin Rivers; and six papers on the consumptive use of water emphasizing the need to use water more efficiently.

From the 85 papers presented, a long list of statements could profitably be quoted. These few are representative of the broadest applicability.

• **Tunnel repairs**—To permit economical repairs to hydro plant tunnels, adit plugs should be used and equipped with access doors large enough to admit reasonably large equipment. F. C. Steele, vice president, Pacific Gas & Electric Co.

• **Stresses from strain meters**—Results from seven years operation of nearly 1,500 Carlson elastic wire strain meters in Shasta Dam show that stresses have generally remained low and that the dam appears amply stable. Determining stress from measured strain is now a reliable procedure, and the results will influence analysis and design of large dams. V. N. Raphael, U. S. Bureau of Reclamation.

• **Colorado River delta**—Reduced flow due to upstream diversions has resulted in the deterioration of meander channels in and building up of the Colorado River delta. This will eventuate in a serious flood threat to California's Imperial Valley and will make drainage of irrigated lands difficult. Proposed remedy is a flood-control dam 100 miles above Yuma, and rectification of channels below Imperial Dam. L. M. Lawson, American Commissioner, International Boundary Commission, El Paso, Texas.

• **High-cost freeways**—California freeways are costing from $2,000,000 to $5,000,000 per mile. The state has built or has underway over 600 miles of such roads and has "declared" an additional 850 miles for freeway construction in the future. Chester H. Purcell, California Director of Public Works.

• **Records of structural settlement**—Engineers should insist on obtaining adequate soil data and continuous settlement or deflection records from the very start of construction of engineering structures. This information should candidly be made available to the profession, as has been done for the Los Angeles Prudential Life Building, New Orleans' Charity Hospital, the San Francisco Airport and a major oil refinery installation. William W. Moore, Dames and Moore, consulting engineers, San Francisco.

• **Ion exchange water softening**—Polystyrene resinous exchangers have three advantageous characteristics: Their high capacity permits a smaller volumetric installation. They are not affected within a pH range of 1 to 14 and the chemical composition of the water does not tend to break down the exchanger. Operating efficiency is high.

(Continued on page 24)

WRONG WAY—Boom of this crane bent backwards and crashed to the street in the Bronx, New York City, recently. With two other cranes, this one was lifting a 50-ton girder for an overpass on an expressway. The collapsing boom tore down several electric wires, from one of which three pedestrians suffered minor burns. (Wide World Photo)

ASCE votes to modernize constitution

Members of the American Society of Civil Engineers have voted, by 10,783 to 1,454, in favor of a revised and modernized constitution for the organization.

The results of the balloting were given to ASCE's Board of Direction at the start of its two-day session just prior to the society's spring meeting in Los Angeles last week.

The vote is significant on two counts: It is the largest total ever recorded by the society—44 percent of the membership having participated; the margin of approval of the constitutional change—over 7 to 1—was obtained in the face of considerable organized opposition to change from the old form.

The new constitution, more exactly described as an amendment to the existing constitution, was drafted over a period of several years by a special committee under chairmanship of Arthur W. Harrington, of Albany, N. Y. Its basic purpose is to remove inconsistencies in the old constitution and to make society operations more efficient. Immediate effect will be noticed principally with respect to meetings. These will be reduced from the current four per year to three, and the annual meeting will be held in October, instead of January as previously.

The board designated Houston and Louisville for the spring and summer meetings of 1951, and New Orleans and Denver for 1952.

The summer meeting this year will be held in Toronto, to be followed by a meeting in the fall at Chicago.

• **Other board actions**—The board took note of the society's responsibility to the national welfare by appropriating $6,000 to defray the expense of its members serving on the Engineers Joint Council's National Water Policy project. These committees are working to a July deadline to provide reports for the information of the President's Water Resources Policy Commission.

The board also received the report of the committee on cooperation between ASCE and the Associated General Contractors with particular approval. The report announced formation of a committee to undertake revision of the standard construction contract, in view of changes in contract forms now under study in several government agencies. It also called attention to the current organization of toll authorities by the states for which no funds are supplied for engineering. This frequently results in calls for bids on the basis of sketchy plans or for contractors to supply the engineering. The board agreed with the committee that this was an unsound procedure that should be called to the attention of all state legislatures.

Water, soil, roads top ASCE subjects

(Continued from page 23)

These conclusions were reached after work at the world's largest softening plant where both polystyrene resins and synthetic siliceous zeolites are used. W. W. Aultman, Metropolitan Water District of Southern California.

• **Water reclamation**—Reclaiming sewage for water supply use is feasible, but two basic concepts must be observed. First, it is a process separate and distinct from sewage treatment. Second, public acceptance of unrestricted reuse of sewage waters depends on the inclusion, some place along the line, of a "natural" purification process—blending with lake or stream flow or with underground waters. A. M. Rawn, chief engineer, Los Angeles County Sanitation District.

"Natural" purification can be accomplished in Los Angeles County by using reclaimed water to recharge underground aquifers. This can be done by expanding existing flood control spreading basins since the underground gravels can receive large quantities of water. H. E. Hebert, chief engineer, Los Angeles County Flood Control District.

• **Coordinating survey work**—Federal and state agencies making control surveys for various purposes should prosecute their work to provide closer spacing of permanent state plane coordinate stations. This can be done in addition to the primary purpose of the survey at very little additional cost as compared to the ultimate savings by users of the state systems. C. E. Axsom, Los Angeles County Surveyor.

On one 31.5-mile section of the Hollywood Freeway, the 33 structures will cost $7,000,000, or 37 percent of the total. Such a high relative cost for structures places a great responsibility on bridge engineers to cut costs. Even a one percent reduction is substantial. Watch details to reduce labor costs. Boost working stresses to reduce material costs. L. C. Hollister, bridge engineer, California.

• **Earthquake resistance**—Because modern architecture, with its all-glass walls, has cast aside some of the structural elements formerly used to resist horizontal forces, floors and walls must be designed as load-carrying diaphragms. Walls can also be used when available. Utilizing such diaphragms is cheaper than attempting to make the frame sufficiently resistive. From tests and experience, California engineers are developing sound methods of design, analysis and construction for diaphragms of concrete, steel and timber. John G. Cast, consulting engineer, Los Angeles.

• **Beach protection**—Erosion of beaches is sometimes aided by man-made construction. The Santa Barbara breakwater, the Port Hueneme jetties, the Santa Monica breakwater and the Mission Bay jetties at San Diego serve navigation well, but have serious effects as regards the beaches. Edwin C. Kelton, engineer, California Division of Beaches and Parks.

• **Airports**—Most airports are land-starved. Only one U. S. airport has as much as 20 percent "extra" land, i.e., dimensions longer than runways. Most have one percent, or less. There is need for extra land, for safe operation and for the use of revenue-producing facilities. All airports should have "buffer" areas between them and built-up areas. On Class V airports, for example, title should be acquired for 2,000 ft beyond each end of the 8,000 ft runway and air rights should be acquired for 18,000 ft beyond these points to avoid payment of damages. William J. Fox, director, Department of Aviation, Los Angeles County.

• **Diatomaceous earth filters**—Compared with conventional rapid-sand filters, diatomaceous earth filters will require 1/8th the space, have 1/8th the head loss, and cost 1/3rd as much. These data result from a four-year investigative program that may well lead to a major installation to treat much of the Los Angeles municipal water supply. Further study is needed to lengthen filter runs and to improve filter-aid reclamation. This could reduce operating costs and help remove tastes and odors. Joseph M. Sevems, sanitary engineer, Los Angeles Department of Water and Power.

• **Construction costs**—Barring a war or other catastrophe, construction costs should remain unchanged for the next year or two. Tending to increase costs are the "ratchets" that keeps wages from going down and the national policies of easy credit and deficit financing. These are balanced at present by improving methods and equipment, better use of workers, and improved design practices. However, there is a limit on the savings that can thus be made and, after a year or two, costs will probably start up again. George H. Atkinson, president, Guy F. Atkinson Co., general contractors, San Francisco.

Rise in federal share of road costs is opposed by highway user groups

Third Highway Transportation Congress favors retaining 50-50 sharing—Pros and cons of toll roads discussed

V. T. Boughton
Associate Editor, ENR

Active opposition to current legislation that would increase the federal share of highway construction costs was voiced at the Highway Transportation Congress at Washington last week. Toll financing of roads also was opposed in resolutions adopted at the closing session, as was the plan for letting states use future federal-aid funds to repay bonds issued as a means for speeding current road work. This plan had been included in bills now before Congress as a means for offsetting the current demand for more toll roads.

The Highway Transportation Congress was the third to be held under the auspices of the National Highway Users Conference as a means for helping the many local organizations in the conference shape their thinking on current highway issues. Representatives of those organizations in attendance at the meeting went on record as favoring giving priority to work on roads making up the Interstate Highway System, but did not favor increasing the federal share to 75% as is proposed by the American Association of State Highway Officials.

In thus opposing any increase, the meeting went contrary to the policy of one of the principal supporters of the Highway Users Conference, the American Automobile Association. The AAA would have the federal government pay two thirds of the cost of construction works on the Interstate System.

• **Strong opposition**—Most outspoken in opposing any increase over the current 50-50 sharing of road costs was C. H. Buckins, assistant chief engineer of the Pennsylvania Highway Department, one of the four participants in a panel discussion of the federal role in highway development. Buckins said that it is time for the states to quit fooling their people by pretending that federal funds are obtained in some mysterious way and to begin to battle for sufficient funds at state levels. Buckins declared that by collecting over one billion dollars in excise taxes from the motorists of the nation in a year and returning only $455 million to the states, the federal government is guilty of the greatest diversion of motor and gasoline taxes. "Withdrawal of the federal government from the field of gasoline taxation and motor excise taxes, with these funds accruing to the states, would do more to improve the highway situation than any possible increases in federal-aid appropriations or increases in the federal share for highway construction."

• **Program too ambitious**—Buckins criticized the standards for the Interstate System as being above what is actually needed for reasonably good highway service, citing conditions in his own state as an example. To meet the "minimum" standards set for that system, he said, would require expenditure of $926,879,000 on the 1,026 miles of the system in Pennsylvania. But to meet "practical and tolerable standards" would require that only $270 million be spent on 594 miles.

"In our opinion," he added, "the real answer to the problem is to concentrate more on salvaging, widening and resurfacing the presently improved roads, construction of the most important rural earth roads, improvement of bottle-necks in our large metropolitan areas, and continued reconstruction of the worst sections of our primary highways."

• **Local responsibility threatened**—A. J. Cronin, managing director of the Automobile Manufacturer's Association, said that any substantial increase in federal participation needs to be watched carefully if we are not to threaten state and local responsibility. Similar views were expressed by Russell E. Singer, executive vice president of the American Automobile Association. The only place where his association favors an increase is in the cost of bringing the Interstate System up to required standards in order to speed that work.

The association is strongly opposed to any federal participation in local road work, as proposed in the Chavez bill in the Senate—S 3424—and Singer urged all the organizations partici-

(Continued on page 26)

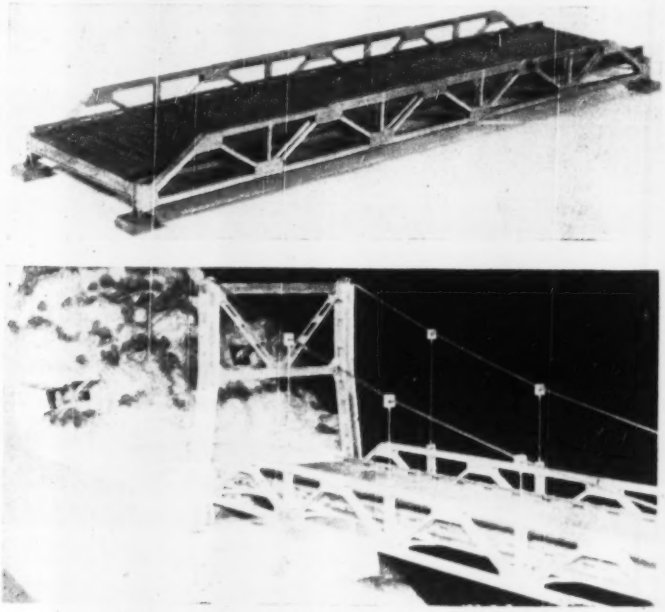

QUICK BRIDGE—Search for a standardized bridge design primarily for military use that would make possible stocking of standard parts (ENR April 27, p 25) has resulted in development of spans like the model shown here. At top is the pony truss span that can be assembled in lengths of 40 to 200 ft for use (below) in suspension bridges. Also developed are beam spans of 20 and 24 ft. Suspension bridges using the pony spans can be built in lengths up to 640 ft clear span. Both types, planned for a laminated wood flooring, can carry 50-ton combat tanks and comparatively heavy railway loadings.

(Continued from page 25)

pating in the Transportation Congress to oppose the Chavez bill actively. He said passage of the bill might well result in the collapse of the entire federal-aid program.

• **Defective management**—Charles L. Dearing, of the Brookings Institution, co-author of the book "National Transportation Policy," said that the present serious condition of the nation's highway system is due to defective management, to failure of concentrated efforts and funds on known needs and failure to protect the highway plant against encroachment and physical abuse. Consequently, he can see no justification for progressively larger federal appropriations unless the investment can be surrounded by appropriate safeguards.

• **Opposing views on toll roads**—Arguments for and against toll financing as a means for financing badly needed roads were laid before the Congress by a four-man panel.

R. E. Jorgensen, deputy highway commissioner of Connecticut, who led off in presenting arguments against toll roads, said that by a major objection to toll road financing, as generally applied, is that such a road is not financially feasible unless the alternate free road is functionally obsolete. "And here is one of the real stingers in this toll road development," he said. "Not only is the alternate free road obsolete, but it must remain obsolete in order that it may not compete with the toll road. Engineer's earning reports for toll road projects are based on such assumptions." Motorists who have to use the old roads are doomed to use an obsolete road with no hope for relief," he added.

Jorgensen devoted most of his discussion to ways for obtaining needed facilities without resort to privately financed toll roads. He characterized as defeatist the arguments to the effect that there was no alternative in most cases. Ways can generally be found to get the needed money, he said, if there is a sincere public desire to do so.

The other speaker against the toll roads was E. Carroll Bean, of the Maine State Grange. He said that the Maine Turnpike "is rapidly going broke", that the income will not be sufficient to amortize its bonds.

• **Favorable aspects of toll roads**—Enoch R. Needles, consulting engineer, New York, whose firm did the engineering work for the Maine Turnpike, was the first speaker in favor of toll roads. He grouped toll bridges and tunnels with toll roads, stating that "a toll project always comes into being because of necessity. It is obtainable on no other practical basis."

The fact that does not appear debatable is the outstanding financial success of all our major highway toll crossings of the past 30 years."

Needles said that theorizing as to what is the best method for building badly needed highways has no practical value, that such roads will not be built unless there is public support for the proposed methods. He added that experience has shown that the public does not support the theoretically correct methods.

"Regardless of conflicting theories on taxation," Needles said, "practicality dictates that the best tax is the one which produces the most revenue with the least complaint and the toll on a highway bridge or tunnel fits that definition almost exactly. The toll is not paid except by the user, and if the service performed is not worth the toll charged, the traveller is at liberty to make other arrangements".

W. B. Getchell, Jr., executive director of the Maine Turnpike, also spoke in favor of toll roads. He noted that the highway problem of today is one of how to finance needed facilities and stated that the principle of assessing tolls has given us now the use of great facilities which otherwise might have taken years to obtain.

As to Bean's criticism of the financial set up of the Maine Turnpike, Getchell said that income now exceeded the requirements for interest and operating costs and that when a sufficient reserve fund had been built up, the excess will be used to amortize the bonds. If traffic grows according to predictions, he said, there will be money for amortization of the bonds.

FHA to help cooperative housers

With low-interest loans to cooperatives by a government backed corporation knocked out of the 1950 Housing Act by both the Senate and the House, the new law picks up the co-op aid enacted in 1949 and gives co-ops a small assist.

Few co-ops have come forward under last year's law. Only two or three have advanced to the stage of obtaining firm commitments from the Federal Housing Administration.

Something had to be done to encourage co-op ventures. With the signing of the 1950 Housing Act FHA Commissioner Franklin D. Richards announced that a new FHA division is being established to administer the cooperative housing program. Warren J. Lockwood has been appointed assistant commissioner in charge of this division, Richards said. Lockwood has served in important positions with FHA since its inception in 1934.

• **Insures non-profit housing**—As now amended, the housing law authorizes insurance of mortgages for nonprofit co-op housing corporations or trusts—with permanent occupancy limited to members—and for nonprofit corporations or trusts that build homes for individual ownership by members.

The insurable mortgage for a project ranges from 90 percent of estimated replacement cost up to 95 percent, depending upon the proportion of participating veterans of World War II. Mortgage amounts are limited to $8,100 per unit or $1,800 per room if the latter limitation is more desirable.

These limitations may be increased, depending upon the number of participating veterans, up to a maximum of $8,550 per unit or $1,900 per room. The interest rate is 4 percent, and the amortization period cannot exceed 40 years.

Hole through water shaft 3 weeks ahead of schedule

Construction crews holed through the 2,245-ft tunnel on the Grand Valley, Colo., reclamation project last week, three weeks ahead of schedule.

The tunnel is an emergency bypass necessitated by collapse, March 9, of a soft ground section of a 36-year old tunnel, shutting off water supply for some 50,000 acres (ENR Mar. 30, p. 22, Apr. 20, p. 29).

Commissioner M. W. Straus addressed congratulatory letters to two construction firms, Rhoades Shefner Construction Co., Inc., Los Angeles, and Crate Callahan Construction Co., Dallas, for their successes in the race against the approaching irrigation season.

Completion date is May 28. "Now it looks as though even this deadline will be cut back as a result of the 'holing through' of the tunnel nearly three weeks in advance," Straus said. Awarded on a low bid of $609,800, the contract specified 72 days for completion.

Considerable work remains to be done, including an additional job of spraying on a coat of concrete to seal the tunnel against seeping of water into the slide area. New movement of an old slide caused the collapse of the old tunnel. This safeguard against any further slides, or danger to the railroad tracks at the foot of the slide area, will require an "additional 10 days, but at the rate construction is proceeding," the work will still be completed within the stipulated time, Straus said.

Oregon highway damage hits new road funds

Highway engineer recommends quarter of new road budget be diverted to repair heavy traffic damage

Oregon's prewar highways have been damaged so severely by increased heavy traffic that State Highway Engineer R. H. Baldock has recommended that at least one-fourth of the $15,000,000 annual allotment for new highway construction be diverted for the next five years to repairing and strengthening existing highways.

Not built for the heavy traffic now using them, the state's roads are deteriorating rapidly, particularly during the past two years. This condition is blamed partly on the influx of new population and partly on persistent overloading.

• **Frequency big factor**—Baldock reported that today's frequency of heavy loads, even those under statutory weight limits, is a major cause of highway deterioration. As for disregard of weight regulations, he said, fines are insufficient to deter many operators.

"The damage to roads built for much lighter traffic than is now borne is so widespread throughout the state," Baldock said, "that unless immediate steps are taken, there is danger of a major portion of our entire highway system breaking up.

"These damaged road conditions are prevalent more or less over the nation, but are particularly so in Oregon because of the heavy increase in population since 1940, which has resulted in material increase in traffic, particularly heavy motor truck traffic.

"It will be necessary, in order to reduce annual maintenance costs as well as place our present highway system in shape, to reconstruct our present pavements to withstand greater loads, and in building new roads, to make them stronger."

In Oregon highways are classified into two groups. On group 1 roads, trucks may operate with a maximum load of 72,000 lb. On group 2 roads, largely secondary and of lighter construction, the load weight limit is 68,000 lb. The group 2 roads have suffered the greatest deterioration from use by trucks. In this group it has been necessary to spend large sums to repair truck damage to roads that would be adequate for lighter traffic, even though used by comparatively few trucks.

• **Asphaltic concrete used**—Plans for strengthening weakened highways call for laying about 4 in. of asphaltic concrete on top of existing roads. In this mixture of asphalt and aggregate, the asphalt acts as a binder. Cost of such reconstruction is estimated at about $24,000 per mi in cases where road widening is not required. This compares with new construction cost of from $32,000 to $58,000, depending on subgrade conditions.

Experience of Oregon highway engineers indicates that this reconstruction process brings results virtually the same as a new road, as the asphaltic concrete layer provides the same smooth surface as new construction, as well as eliminating the condition of fatigue in the road foundation.

As an example, Baldock cited the 12½ mi of Santiam highway between Albany and Lebanon, Ore. After 15 years of use, the annual surface maintenance cost of the original road had risen to $740 a mile. After being resurfaced in 1945, the present maintenance cost, after five years of use, is $110 a mile, only slightly above that of new construction.

Earth slide threatens half of Astoria's homes

A slope on which half the homes of Astoria, Ore., are located is in danger of slipping away in the near future, if preventive measures are not taken immediately.

That was the report given Gov. Douglas McKay by an Oregon Highway Department geologist who investigated an earth flow in which 23 homes were destroyed or damaged. House movers saved 18 more by prompt action.

The area immediately affected is 300 ft wide and 1,000 ft long, on a height overlooking the port and business area. A mile-wide area immediately surrounding it is threatened, Geologist Lewis Scott reported to Governor McKay.

Excessive water, from rain and heavy, moist snow soaked through 50 ft of ground to a bed of slick clay limestone. Then the hilltop began sliding down hill. The sliding began in January, but did not assume serious proportions until early April. Then the earth began moving toward the Columbia River at about 5 to 10 ft daily. Eighteen homeowners had their houses moved. Three were demolished. A score more were damage more or less seriously.

After a week, the slide slowed to a rate of about eight ft in five days. Engineers said that the flow could be checked entirely only when a toe formed at the foot of the hill, halting further slides.

The highway department loaned a horizontal boring machine which was used to safeguard the surrounding area. Holes were bored into the foot of the hill and lined with tile. Immediately, they produced drainage.

Economy takes beating in building fields

Civil works bill, veterans hospitals and local hospital construction get extra funds in Congress

The wheels of Congress ground more rapidly last week, and they ground exceeding coarse. Economy took a beating on three construction fronts.

In accord with hoary precedent, House conferees accepted almost without resistance additions made by the Senate to the flood control rivers and harbors authorization bill (ENR Apr. 20, p 23). Practically no deletions were made in added authorizations. Such reductions as the House conferees held out for, apply almost exclusively to the allowances authorized in this bill for certain projects.

• **$1.5 billion more**—As reported by the conference to the two houses, the measure authorizes $1.3 billion for flood control and $200 million for rivers and harbors. The bill allows about $240 million for miscellaneous items, some $200 million of it to the Interior Department for continuing works in the Missouri River Basin under the Pick-Sloan plan adopted in the Flood Control Act of 1944.

On another front, the House, in uproarious rebuke to the economy plans of the President, restored to the Veterans' Administration postwar hospital program 16,000 beds cut out by Mr. Truman when he submitted his budget message in January 1949. These involve an estimated $237 million.

Finally, the House rejected a recommendation of its own Appropriations Committee that federal grants-in-aid for local hospital construction be held in fiscal 1951 to $75,000,000. The House voted $150 million a year in accordance with the original Hill-Burton Act of preceding years.

Adm. W. M. Angas retires

Rear Admiral William Mack Angas (CEC) Director of the Atlantic Division, Bureau of Yards and Docks, has retired after a 32-year Navy career. He has become chairman of the Civil Engineering department of Princeton University.

A graduate of MIT in 1917, Admiral Angas is known to thousands of Seabees as the Officer in Charge, Third Naval Construction Forces, (CB's) who supervised the construction of many bases during the war, including the 7th Fleet Headquarters in Manila. He received the Legion of Merit for exceptionally meritorious service in that work.

1950 housing boom seen unaffected by lowering of FHA interest rate

Industry was off to record-breaking start before rate was lowered—No tightening of credit anticipated by ¼ percent drop

Lowering of the interest rate from 4½ to 4¼ percent for FHA-insured mortgages on detached houses caused only mild surprise. The subject had been under intensive study for months, and rumors had been cropping up constantly that the rate was going to be reduced.

Purely by coincidence, the President signed the 1950 Housing Act (ENR Apr. 12, p. 27) on the same day that the forthcoming interest change was announced. The two events had no relation to each other. Decision to lower the interest ceiling had been made by the Federal Housing Administration without knowledge that Mr. Truman was going to sign the new housing law before leaving for his air tour of southern military installations.

Fundamental reason for the new FHA regulation was the conviction that 4¼ percent rate would be effective in supporting the 1950 housing market. The basic fact underlying this belief, as expressed by FHA Commissioner Franklin D. Richards, is the progressive easing of the mortgage money market during the last 18 months.

• **Credit not tightening**—There is no evidence, as he sees it, that the easy money market will tighten up soon. Continuous study of the mortgage market by the economics and statistics staff of FHA, plus the daily contact of Washington and zone officials with mortgage lenders, led Richards and his advisers to conclude that the time was ripe for reduction of the maximum permissible rate for government-insured paper.

No move of this kind would have been made at federal housing officials had thought it would slow down the pace of housing construction. With 1950 off to a history-making start of 285,000 new dwelling units put under construction in the first three months, Washington officials have no desire to spin the wheels.

Richards and his chief, Administrator Raymond M. Foley, of the Housing and Home Finance Agency, put out a joint statement that gives the essence of official thinking: "After months of thoroughly studying the mortgage money market, it was concluded that this lower rate would be effective in producing a high level of residential construction under the FHA program."

Two effects may be looked for as result of the interest rate reduction. First, as Richards points out, would be a possible lowering of the premium on sale of FHA-insured mortgages from one investor to another. Nationwide, this premium ranges today from ¼ percent or less to perhaps 3 percent. The national average might be 1¼ to 2 percent; Fannie Mae—RFC's mortgage purchasing subsidiary—collects 2 percent surcharge on its sales of FHA paper.

• **See lower premium**—With the reduction in interest rate, the premium probably will drop somewhat. Officials of RFC's Federal National Mortgage Association will not have to face the problem for some time. Fannie Mae's present holdings of $350 million in FHA 4¼ percent mortgages have acquired added attractiveness. It is unlikely that investors who previously had taken options to buy $150 million of these mortgages will let their options lapse.

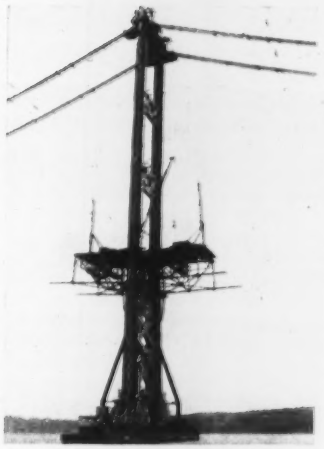

TACOMA BRIDGE PROGRESS—Erection of the steel floor for the new Tacoma Narrows Bridge has begun from one of two towers. Work on 19 panels will proceed simultaneously from both 500-ft towers toward the middle of the main span. Bridge is to be opened this fall.

A second effect may be that more mortgages will hereafter be financed without FHA insurance. Investors may choose a higher interest rate in preference to an insured risk. This change would cause FHA no alarm if home financing did not suffer.

Even in these days of a so-called housing boom, a large part—probably at least half—of residential construction is financed without government insurance or guarantees. FHA is more than willing to see borrowers get their money from lenders in private deals, without government aid, so long as such loans can be arranged. FHA's function, as federal officials see it, is to act as a stabilizer and stimulant of the home mortgage market. As part of that function, its regulation of interest rates acceptable to FHA is a potent market force.

Central Arizona Project rebuffed

Central Arizona Project's chances at this session have gone down for a time count. The House committee considering the Senate-passed bill to authorize the mammoth project voted to postpone any further action until June 15.

At that time, the House group may revive the measure or may let it lie to gather more dust. The blow came from Rep. Fred E. Crawford, Michigan Republican. On his motion, the committee voted to delay further discussion until the Budget Bureau supplied the answers to 20 questions Crawford propsed.

To give the members ample time to mull over the answers, the committee went along with the added proviso that the issue could not be revived before the middle of June.

Prior to the postponement, the committee approved three amendments. One, by Crawford, eliminated the high-cost tunnel that hypothetically could some day be driven to deliver water from the proposed Bridge Canyon Reservoir to central Arizona farms, thus doing away with the pumping lift from Lake Havasu, behind Parker Dam, a couple of hundred miles downstream.

Both the other amendments were offered by Rep. John R. Murdock, Arizona Democrat, and ardent supporter of the project. One of them stipulates that the repayment period shall not exceed 75 years. The other would limit the overall cost to $596 million, about 15 percent below the maximum proposed by the Senate. Murdock considered it in line with prospects for costs lower than had been indicated by estimates based on July, 1947, prices.

MILLION-YARD YEAR—Construction crews got started early on the 1950 season at Hungry Horse Dam, on the Flathead River in western Montana. Operating on a 24-hour schedule, they hope to pour 1,000,000 cu yd of concrete this year, one-third of the dam's volume. (Reclamation Bureau Photo)

Air pollution conference at Washington this week

With $100 million a year being spent to reduce air pollution, the latest control equipment got a lot of attention at the first government-sponsored conference on the subject, held at Washington this week. Interior Secretary Oscar L. Chapman heads the inter-departmental committee sponsoring the conference.

To meet air pollution regulations, cities in New York state spent more than $2,000,000 modernizing plants during 1948, and at least $3,500,000 during 1949, according to estimates of that state's Health Department.

All types of equipment to control air pollution, including bag filters, scrubbers and some collectors, were discussed by a panel on equipment at the technical conference on air pollution. Authorities on air pollution from government, industry, and educational and research institutions were invited.

Besides equipment, other panels discussed instrumentation—new developments in detecting, collecting and determining air contaminants; analytical methods and properties—the chemical analysis of air pollutants; health, including the effect of air pollution on cancer and acute infections respiratory diseases; meteorology—the relationship of the weather to air pollution; legislation—legal problems in the control of air pollution; and agriculture—the effect of air pollution on crops and animals.

Industry, USPHS confer next week on industrial water pollution

Seek to organize a technical committee to supervise working groups investigating problem—Sparks major clean-up drive

Industry and government are getting ready to do something about industrial water pollution. Next week, industry representatives come to Washington to sit down with U. S. Public Health Service officials. The object: A working organization to cut down the pollution of the nation's streams by its industrial machines.

Major objective of the meeting is to set up a technical task committee of some 30 experts. They will supervise some 250 technicians who will form working committees to dig into the numerous problems of industrial pollution.

This meeting is expected to come up with "yardsticks" or basic formulas and terms upon which PHS and industry engineers can agree. The working committees are expected to submit information on such factors as permissible pollution for certain industrial wastes.

• **Information the problem** One of the problems since establishment of the program has been industry's inability to get information on the water pollution control program and its effects. Industry has complained that no straightforward statement on industrial wastes has yet been issued by USPHS and that "queries from industrial concerns often have gone unanswered."

Six months ago, Louis L. Warrick, chief of PHS Technical Service Branch set out on a nation-wide tour to talk to industry and local authorities. During that time, he flew thousands of miles gathering reactions. He returned to Washington recently with an expression of willingness from industry to discuss the problems of stream pollution.

Although PHS has the major responsibility for administering the program, it is feeling its way and won't move without first getting reaction of industry's technical men. Anything that is done will be done with industry's cooperation. PHS realizes that the program can't be made to work unless industry is a willing participant in the campaign.

• **Federal aid available** Under the Water Pollution Control Act of 1948, financial and technical aid is provided for states and municipalities tackling pollution. The act authorizes expenditures for the states not to exceed $27,000,000 a year for five years. Of this, $22,500,000 is to be loaned at low interest for the construction of public treatment works.

During the five-year period, $5,000,000 is authorized for grants to states for investigations and research on industrial wastes. Another $5,000,000 is for grants to municipalities for planning treatment works. There's a $4,000,000 authorization to build federal pollution research facilities in Cincinnati.

For use this fiscal year, Congress appropriated $2,450,000. No construction-loan money was appropriated.

So far, PHS has set up a Division of Water Pollution Control in Washington and partitioned the country administratively into ten major river basins. Field headquarters were established recently in each area.

• **Changes proposed** Several amendments to the Water Pollution Control Act have been proposed. One would increase the loan provisions from present comparatively small sum to $5,000,000 for individual projects. Another would reduce interest rates on these loans from 2 to 1 percent. A third would more than double annual appropriations for loan funds, from $22,500,000 to $50,000,000.

A separate bill by Representative Byrnes, of Wisconsin, would encourage the prevention of water pollution by allowing, as income tax deductions, amounts paid for industrial treatment work. The bill allows accelerated (five-year) depreciation, a device often used by government to promote private participation in activities government is pushing.

PHS spokesmen say they favor anything that will cut down pollution, but won't commit themselves on support of the Byrnes bill. This is a matter for the Internal Revenue people, they say.

The Byrnes bill would help most middle-size firms which haven't the resources to build expensive treatment works. Most of larger firms have built their treatment plants.

But, while industry is making an effort to clean up, polluting substances are being poured in by municipalities at an even faster rate than they are being removed. Hundreds of cities continue to channel untreated sewage into rivers against orders of state health departments. A number of cities have appealed to the courts to put off construction of needed plants because of financial problems.

CONSTRUCTION BUSINESS

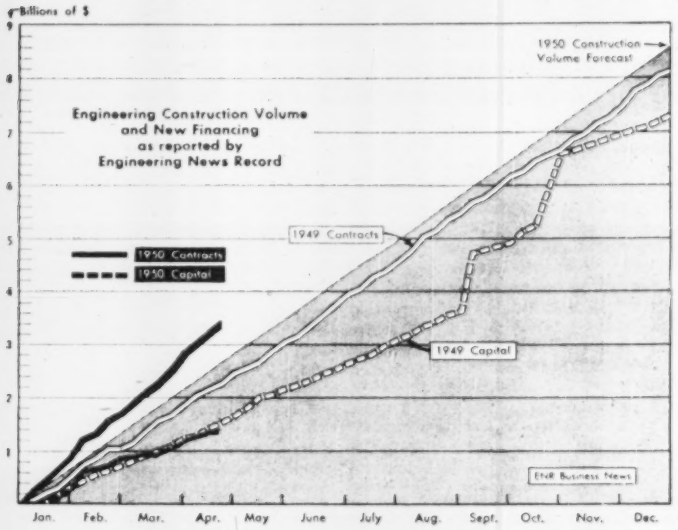

Housing boom sends April contract volume to record high for month

An all-time high in mass housing contracts sent April construction volume in April to a new record for the month, according to ENGINEERING NEWS-RECORD reports.

This is the fourth record month in a row. The April total of $885,044,000 represented an average of $213,761,000 a week. That is 7% higher than March, 45% above a year ago, and 19% above the previous record for April, set in 1942.

Both private and public construction topped March, 1950 and April, 1949.

• **Private awards a record**—Private contracts, paced by housing, set an all-time high. They averaged $137,465,000 a week, 10% above March—the previous record month for private construction.

Mass housing averaged $85,481,000 a week—30% above March and 20% higher than the record February average.

Commercial buildings also came close to a record. They were 22% above March and 137% higher than a year ago. Unclassified private construction was 70% above a year ago, but 23% under the average for March.

• **Roads lead public works**—Public works contracts in April averaged $83,796,000 a week—43% above March and 6% above a year ago.

Street and road contracts—averaging $26,277,000 a week—almost topped the all-time highs of July and August last year. They were 20% above March and 68% higher than a year ago.

Bridge construction gained 6% over March and was 38% above last year.

Only classifications showing declines both from a month ago and from April last year were sewerage and unclassified public works.

• **1950 going strong**—In the first four months of this year, every major type of private construction has held above last year. And most kinds of public works have, too—especially streets and roads, up 78%.

Only earthworks and waterways, bridges, and public housing contracts are below a year ago. And bridges are beginning to show a strong upturn.

Industrial building is now 4% above last year, compared with earlier forecasts of a 13-15% drop in 1950.

• **All areas up sharply**—The contract boom of 1950 stems from every region of the country. Increases over a year ago range from 23% in the Middle Atlantic States to 99% in New England.

ENGINEERING CONSTRUCTION CONTRACTS REPORTED TO ENGINEERING NEWS-RECORD — APRIL, 1950

ENGINEERING NEWS-RECORD reports contracts for U. S. construction projects of the following minimum sizes: Waterworks, excavation, drainage and irrigation, $28,000; other public works $50,000; industrial buildings, $68,000; other buildings, $250,000.

(Four Weeks' Thousands of Dollars (000 Omitted))

	April, 1950						U. S. Cumulative Four Months		% Change	Canada
	New England	Middle Atlantic	South	Mid West	West of Mississippi	Far West	Total U. S.	1950	1949	49 '50	April, 1950
Public Works											
Waterworks	347	1,234	1,220	2,245	3,443	749	17,141	81,615	51,967	+ 61	807
Sewerage	608	2,564	2,906	4,830	2,502	3,168	16,438	71,519	73,482	– 1	2,572
Bridges	179	18,907	3,230	1,249	3,217	2,187	28,969	103,345	108,278	– 5	694
Earthwork and waterways	1,252	1,284	11,804	1,374	4,528	5,162	33,408	128,700	203,128	– 37	1,062
Streets and roads	5,864	25,484	24,374	11,528	26,240	11,567	105,106	337,373	189,686	+ 78	4,254
Public buildings, residential	13,569	2,368	3,323	6,003	1,446		27,619	67,788	133,215	– 50	2,426
Other public buildings	7,282	9,914	20,430	8,340	19,458	14,523	83,842	552,904	396,195	+ 39	4,551
Unclassified	1,786	2,304	2,300	3,220	10,386	2,134	22,680	118,588	82,401	+ 44	2,611
Total public	29,853	64,523	70,868	37,629	77,212	48,696	335,183	1,466,832	1,240,335	+ 18	16,385
Federal government included in above classifications	2,020	52,651	12,508	3,113	21,718	11,031	53,741	479,908	362,658	+ 30	4,530
Private											
Bridges			580	438			1,018	2,483	1,075	+ 131	100
Industrial buildings	17,791	13,725	23,167	20,185	13,921	3,234	76,075	354,589	330,650	+ 4	19,942
Commercial buildings, residential	10,494	80,502	26,581	33,840	80,110	98,085	344,926	1,169,706	579,043	+ 102	38,865
Other commercial buildings	2,774	13,775	3,651	3,475	8,646	3,194	88,965	323,547	190,312	+ 70	3,760
Unclassified	23	1,020	13,328	721	23,382	2,599	41,877	163,036	105,717	+ 54	4,211
Total private	17,996	160,913	67,322	61,212	132,309	109,509	549,861	2,013,361	1,220,797	+ 65	37,818
Total Engineering Construction:											
April, 1950 — 4 weeks	47,851	232,436	138,190	98,241	209,521	158,205	885,044				54,203
March, 1950 — 5 weeks	52,187	239,240	172,672	134,148	282,358	144,148	991,433				57,360
April, 1949 — 4 weeks	33,558	189,754	94,791	71,433	166,147	71,852	580,663				64,161
Four Months — 1950	176,009	845,598	505,433	451,251	806,192	692,881		3,480,193			188,374
Four Months — 1949	88,502	488,436	268,668	272,197	647,801	396,682			2,462,132		187,780
% Change 49 to '50	+ 99	+ 73	+ 87	+ 66	+ 24	+ 75				+ 41	+ 1

BIDS AND BIDDERS

(Major project news received after Construction Reports, page 75, went to press.)

Lucky Peak Dam—Morrison-Knudsen Co., Boise, Idaho; J. A. Terteling & Sons, Boise; Micco Corp., Clearwater, Calif., and Puget Sound Bridge & Dredging Co., Seattle, Wash., were joint low bidders at $3,494,965 for constructing excavation, embankment, for "diversion channel," cofferdams, main dam and spillway for Lucky Peak Dam on Boise River, Idaho. U. S. Engineers, whose estimated cost was $5,555,908, opened bids April 25 at Walla Walla, Wash.

Road and Bridge—New Jersey Turnpike Authority, Trenton, awarded contract for constructing section of turnpike in Salem and Gloucester Counties to S. J. Groves & Sons Co., Woodbridge, $5,095,735, and for bridges in Mercer and Middlesex Counties to P. T. Cox Construction Co., Inc., New York, N. Y., $1,365,108.

Housing—E. F. Construction Co., Bridgeport, Conn., has been awarded $3,794,440 contract for building housing for City of Bridgeport Housing Authority, Bridgeport, Conn.

Processing Plants—Tennessee Gas Transmission Co., Houston, Tex., plans processing plant to treat products removed from natural gasoline at Brandenburg, to cost about $2,000,000; and natural gasoline processing plant at Greensburg, Ky., estimated at $3,000,000.

College—Roman Catholic Archbishop of San Diego, Calif., received low bid from Trepte Construction Co., San Diego, at $3,820,235 for buildings at San Diego College for Women.

Pipe Line—Anderson Brothers Corp., Houston, Tex., will construct eastern section of oil pipe line from Blineo to Satsuma and Baytown, Texas, at an estimated cost $7,450,000; western section has been awarded to Morrison Construction Co., Menard, Tex., at $6,785,000. The line is for the Humble Pipe Line Co., Houston.

Plant—Hunkin-Conkey Construction Co., Cleveland, has been awarded contract at about $3,000,000 by the Ford Motor Co., Dearborn, Mich., for excavation, substructure, and railroad tracks for plant at Cleveland. The entire plant will cost about $80,000,000.

Dwellings and Shopping Center—Miles Strickland, Houston, Tex., plans building dwellings and two shopping centers in Houston to cost about $6,400,000. Knostman & Webster, Houston, are architects.

Dam—Mexican Government, Mexico City, plans to build an irrigation dam and hydroelectric project at Tacotan, State of Jalisco, to cost in the vicinity of $3,460,000.

Reduction Plant—Harvey Machine Co., Inc., Aluminum & Brass Div., Los Angeles, Calif., plans aluminum reduction plant at Henderson, Nev. Cost will be about $5,300,000.

Gas Pipe Line—South Georgia Natural Gas Co., Atlanta, plans 144-mi natural gas line from Talbotton to Brooks County and 104 mi lateral lines to various communities in Georgia to deliver 40,000,000 cu ft per day. Estimated cost will be $6,600,000.

Catalytic Cracking Plant—Pan-American Southern Corp., El Dorado, Ark., awarded contract to Foster Wheeler Corp., Houston, Tex., for second fluid catalytic cracking vapor and recovery unit at El Dorado. Cost will be about $2,700,000.

Shopping Center—MacDonald Products Co., San Francisco, Calif., plans constructing shopping center at Walnut Creek, Calif., to cost $3,000,000.

Hospital—St. Lukes Hospital, Milwaukee, Wis., will take bids June 1 for hospital at Milwaukee. Estimated cost is $2,322,000. G. J. DeGelleke, Milwaukee, is architect.

Housing—E. H. McGraw Construction Co., New York, N. Y., was low bidder at $3,020,000 for public housing project in Hartford, Conn., when City of Hartford Housing Authority, opened bids April 25. Kane & Fairchild, Hartford, are architects.

Veterans Hospitals—Veterans Administration, Washington, D. C., awarded contract for Chicago hospital to W. E. O'Neill Construction Co. and Kenney Construction Co., both Chicago, at $12,146,000. Schmidt, Garden & Erikson, Chicago, are architects. Contract for hospital at Cincinnati was awarded to John A. Johnson & Sons, Inc., Brooklyn, N. Y., at $7,278,983.

Steam Generating Station and Dam—Niagara Mohawk Power Co., New York, N. Y., plans to build steam-electric station near Albany, $27,000,000 and dam on Sacandaga River, near Stewart Bridge at $4,000,000. Stone & Webster, Inc., New York, N. Y., is engineer.

COSTS AND VOLUME

ENR INDEX NUMBERS

Index Base — 100		1913	1926
Construction Cost	May '50 426.55	258.69	
Building Cost	May '50 264.27	196.91	
Volume	Apr. '50 387	170	

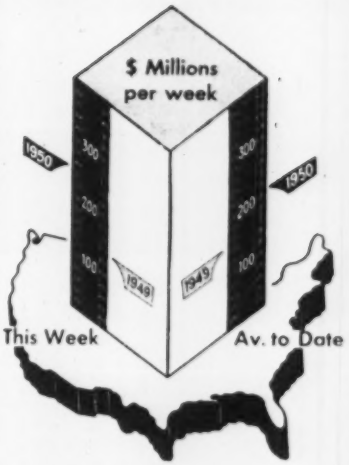

Activity This Week

As reported to ENR (in millions of dollars)

Amount of contracts let

	Week of May 4 1950	Cumulative 1950 (18 wks.)	Cumulative 1949 (18 wks.)	% chge
Federal	$156.6	$561.5	$439.8	+28
State & Mun.	293.0	1,075.0	924.5	+16
Total Public	$449.6	$1,636.5	$1,318.4	+24
Total Private	140.9	2,354.2	1,273.0	+85
U. S. Total	$590.6	$3,990.8	$2,591.4	+54

Contracts by type of work

	This Week	Cumulative 1950 (18 wks.)	Cumulative 1949 (18 wks.)	% chge
Waterworks	$2.2	$50.8	$34.5	+58
Sewerage	2.7	82.2	71.6	+15
Bridges	6.1	112.2	113.0	-1
Highways	21.3	369.2	217.2	+69
Earthwork, Waterways	6.1	123.3	221.9	-39
Buildings:				
Public	43.5	474.2	349.6	+22
Industrial	25.1	358.9	249.6	+44
Commercial	56.1	1,555.2	511.6	+204
Unclassified	30.9	311.6	198.1	+57

NOTE: Minimum size projects included are: Waterworks and waterway projects, $25,000; other public works, $50,000; industrial buildings, $50,000; other buildings, $250,000.

New capital for construction

	1950 (18 wks.)	Cumulative 1949 (18 wks.)	% chge
Corporate Securities	$812.1	$512.5	+57
State and Municipal:			
Excl. Housing	611.2	621.4	-1
Housing	221.5	250.6	-12
Total Capital	$1,429.8	$1,384.9	+3

Cheap Repairs For Damaged Bridges

Flame-straightening does this in the Pacific Northwest:

- **Eliminates costly structural-member replacements**
- **Restores bridges without traffic interruptions**

Ray Bloomberg, ENR Correspondent

INCREASINGLY for the last 20 years, bridge departments of the Pacific northwest have been turning to Joseph Holt, of Seattle, in cases where steel bridge members have been distorted by accidents. Holt, who describes himself as the "originator of distortion control," almost invariably is able to straighten the member in place without closing the bridge to traffic. A V-shaped "heat," by an acetylene torch on strained steel, does the trick.

• **Burned bridge saved.** Holt's largest recent project was realigning 72 floorbeams and two top-chord members on a state highway bridge across the Snake River at Pasco, Wash. The structure is a deck truss type except for a through cantilever section over the channel. The timber deck of the bridge was destroyed by fire Sept. 9, and the steelwork was warped so badly that the structure was thought to be a total loss. Since the bridge was on an important highway, however, and no alternate route was available, the department resolved to attempt to restore the bridge to one-way traffic until a new span could be built.

The plate girder floorbeams, 28 in. deep with 10½ in. flanges were warped in fantastic manner. Some humped up in the middle while others took on compound curves. Upper flanges average 6 in. out of line. Lower flanges were deflected slightly.

As the first step in bridge restoration, Holt and his son, Fred, were called in to straighten the beams and struts, a project that required 25 days and cost the state less than $5,000.

Working 70 ft. above the water, using only an acetylene torch (usually with a No. 6 tip), the Holts straightened beams as much as 5 in. out of line. Their only scaffolding consisted of three 4x12 planks and a light railing along one side of the bridge. This supported the acetylene equipment.

The two men usually worked astraddle beams. They would work on four or five beams at a time, applying V-shaped "heats" to each beam in turn while the others cooled. Mouth of the V in each case faced the side of the beam that needed to be contracted. Since the linear contraction as the metal cooled, was greatest at the mouth of the V, the beam would straighten in the desired manner, at the rate of about 1/4th in. per longitudinal foot of heated metal.

The heats were repeated until the beam was back in line. On the curves, these heats were placed about a foot apart. Occasionally, near the ends, where the beams had to be brought into a 90-deg. angle from the truss plane, as many as four or five heats were made at the same location. The average beam took about 20 heats, the minimum—where the beam was under no stress from the chords—four heats.

The most difficult beams were nearest a 10-in. buckle in the upper chord, which was 16½ in. out of line in a 30-ft. length. The nearest beam contained distortion stresses that caused it to move 2 in. the wrong way when Holt applied two small heats about the size of a quarter. To overcome this, Holt peened the beam on the out-curved side until it moved 2 in. inward; then he applied heats until the beam was straight.

Part of the work was observed by members of the University of Washington Engineering Experiment Sta-

BEFORE—A bridge near Roseburg, Ore. was twisted out of shape and severely damaged by settlement of the center pier during a flood . . .

FLOORBEAM of burned Snake River deck truss bridge was distorted. Same beam (r.) with chalk-mark amount of movement induced by flame-straightening.

tion, which has a project to study Holt's method of straightening. Preliminary tests at the university and also at Ohio State University indicate that the heating in no way damages the metal. In some cases, elasticity of the re-aligned steel is reduced but, in all cases, the straightened steel can carry more stress than it did before.

Another Holt project was straightening the twisted steel members of a flood-damaged Oregon highway department bridge near Roseburg. The upstream center-pier column of the two-span continuous truss sagged at least 3½ ft, causing buckling among the top-chord and bracing members. The bottom chord was broken at one end, some of the upper laterals were broken and about 100 steel members were bent or twisted out of shape.

In addition to raising the bridge and replacing the center pier, the highway department had the choice of replacing the damaged members at a cost of $40,000 or straightening them with the Holt method at a cost of $6,000. The department decided to replace two upper-chord sections and three upper-lateral sway frame pieces and have Holt finish the topside work.

The worst member to be flame-straightened was 42 in. out of place at its center point. In some instances, the natural stresses of the structure were enough to spring the bent member back to the original condition; in other cases, outside force was applied by hydraulic jacks.

• **How he does it**—Holt applies heat to about 1,000 deg. F., (producing a light red color) at the apex of the V, progressing gradually outward toward the mouth of the V, weaving the torch in ever broader strokes. He cautions that there must be "metal cold enough, strong enough and so situated as to force the heated metal to upset, unless some outside force can be added to force that upsetting action. The structure also must be analyzed to determine whether the member is under tension or compression, as untold damage can be done if these forces are ignored."

Test results indicate a 1-1½% loss in elongation but increases in yield point, load and tensile strength.

"Steel contracts on cooling as much as it expanded on being heated," Holt points out. "This is true in volume but not in alignment or length, if the heat is properly applied. It is up to us to apply the heat in the proper way to straighten, bend or shorten the steel member to meet our needs."

Ordinary members of mild steel need no reinforcement unless subjected to excessive stresses. Reinforcing is advisable, however, where heat-treated steel is re-aligned, says Holt.

Holt has used his method on bridges to straighten portals, batter-posts, struts, laterals, verticals, wind-braces and chords, all without removal from original positions.

When there is stress on a member that is being heated, the stress must be relieved if it is of an amount sufficient to elongate the metal while it is hot. Sometimes where internal stresses exist, as in power shovel dipper-sticks, the first heat only relieves these stresses and a second heat is required to do the pulling.

• **Wrecked truck repaired**—Truck frames often are bent from overloading, ruts in the road or collision. In one case handled by Holt, a truck was hit head-on while carrying a full load. Its frame was bent downward as well as sidewise just back of the cab, so that the front end of the frame was 15 in. out of line on the vertical and 8 in. out of line on the horizontal plane. There were several small kinks, and from the main bend forward the frame was diamond-shaped, with double bends in the two front cross-members.

After the truck had been stripped for necessary repairs to the cab, engine and transmission, Holt removed the two channel cross-members, which already were loose, and heated them so as to bring them straight on the horizontal. One had to be heated on the flanges, starting at the web; the other, being bent the opposite way, had to be heated on the web. To bring the channels in line on the vertical, the top flange was left cold, the heat starting on the web next to it and widening out toward the bottom, and the bottom flange heated to the same width as the heat at the bottom of the web. A hammer was used only to flatten the web or flanges where they were kinked badly over short distances, and then with as little heat as possible. No force, other than contraction caused by the heat, was used to pull the frame back to its proper alignment. The frame was reinforced with a plate of mild steel ¼ in. thick, placed inside the channel and held by welds on the edges, with rivets in existing holes.

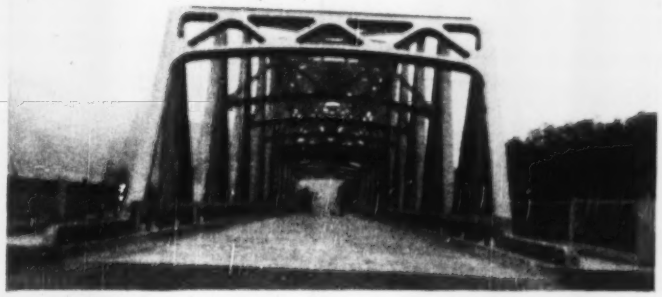

AFTER—Ready for traffic. The highway department replaced pier and a few members; Joseph Holt straightened more than 100 members for $6,000.

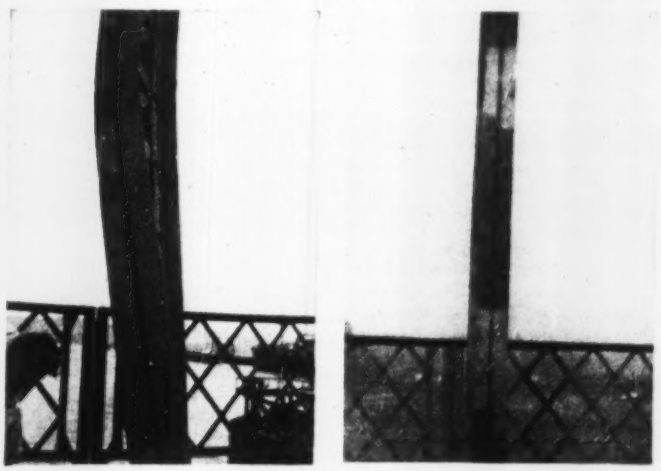

LOG TRUCK hit this vertical in West Bridge, Aberdeen, Wash.; bent the member in three places. Holt straightened it in two hours with acetylene torch and a hoist.

Flat-Slab Design Speeds Construction

1 Buggies carrying concrete for columns traveled on forms for flat-slab floors, not needing runways since . . .

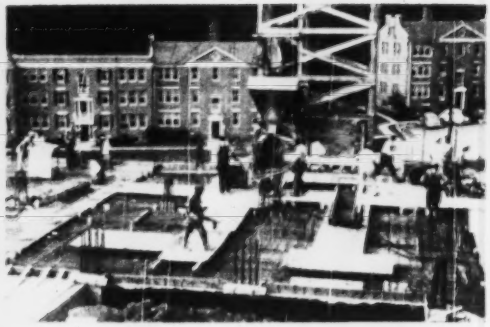

4 Runways were laid. Hoisted concrete was dumped into a hopper, then fed to buggies and slab cast. Next day . . .

5 Column forms were erected for the next story, beginning with base nailed to slab to eliminate bottom bracing.

CONCRETING was completed eight weeks ahead of schedule on a 14-story apartment house that incorporates the first flat slab floors without drop panels and column capitals in Washington, D. C. About 24,000 cu yd of concrete were placed in the superstructure between Aug. 15 and Feb. 12.

The contractor credits simplified formwork, made possible by the flat slab design, fast-setting concrete and early construction of gravel roads to serve the job.

There are two buildings in this $8,000,000 project, known as the Quebec House Apartments. The first to be completed contains 560 rental units, the other 290. Both will be completely air-conditioned, each apartment having individual controlled units to which hot and cold water will be piped.

• Buildings fitted to site—The site is on a steep slope. To take advantage of this, the architects fitted the structures to the contours as best they could, employing narrow wings. On the high side, the buildings satisfy maximum permissible height requirements of the city code.

Quebec House No. 1 consists of three 65-ft wide wings, each a little over 200 ft long, joined in the shape of a T. Two of the wings follow the contours along the higher portion of the site, the third along a lower level. Nevertheless, because of the steepness of the slope there are eight stories above the main entrance and six below.

• Flat-slab floors—The building is of reinforced concrete, with flat slab floors generally 6¼ in. thick throughout. It is cut by three 2-in. transverse expansion joints located between columns, so that the slabs are cantilevered to the joints.

Columns are spaced from 12 to 20 ft apart and have no capitals. Instead, slab reinforcing steel is concentrated over the columns to permit higher shear stress.

Design of slab steel in areas distant from the columns was controlled by city code requirements for minimum steel based on a percentage of gross concrete section. Reinforcing bars are spaced 5 or 10 in. apart. Bottom bars are mostly ¾ in. rounds, top bars ¾ or 2-in. rounds. About 95% of the steel is straight.

The slab was designed as an elastic, continuous frame to support a combined live, dead and partition load of 140 psf, assuming 2,500-psi concrete. As a check, it was also investigated by several methods: Difference equations of Henri Marcus, differential equations of A. Nadai, infinite trigonometric series of V. Leve, replacing circular plate, and coefficients of the Washington building code. All methods gave about the same results.

Spandrel beams are wide and shallow, 40 x 92 in. deep, to meet the city code requirement that the front of the spandrels must project to within 3 in. of the face of the wall for a 9-in. brick wall. The width of the beams was chosen so that the largest size column

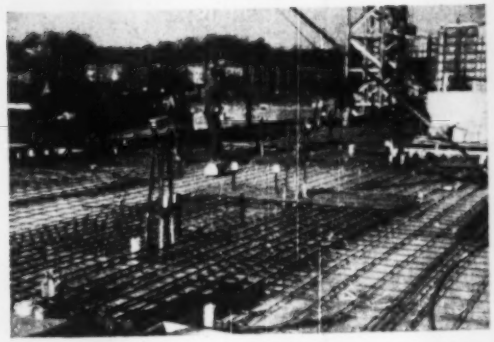

2 Drop panels and column capitals were eliminated. Reinforcing is concentrated over columns and . . .

3 Stirrups for 40-in. wide spandrels extend into slab to serve as top steel also. After steel was placed . . .

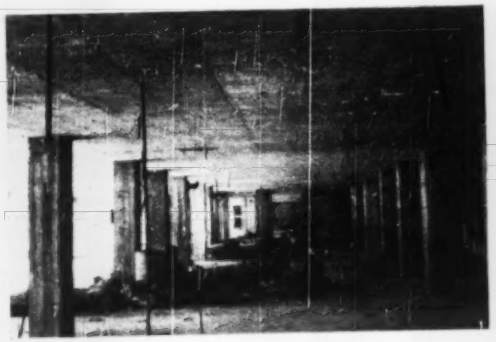

6 Under side of the flat slab, which can be painted to form a ceiling, is shown for a typical story in . . .

7 Quebec House No. 1, which has 8 stories above the main entrance (left), 6 below. (Photos by Jacob Feld)

would be 2 in. inside the spandrel. Stirrups, spaced generally at 10-in. centers, reinforce the beams against torsion and are extended to serve also as top steel for the floor slab.

• Design speeded concreting. This flat-slab design greatly simplified formwork requirements compared with conventional beam-and-slab construction or flat slabs with drop panels. Here is how a typical story was formed and cast.

Plywood for the slab forms came to the job in 4 x 10-ft panels and was cut to 2-ft widths, which the men could carry under their arms. The forms were nailed to 3 x 4's carried on patented adjustable shores supported on the floor below. Then, the column concrete was placed, the slab forms serving as a runway for the buggies. This saved an operation—for beam-and-slab construction, the contractor would have had to build a runway. After column concreting was completed, reinforcing steel, piping and conduit was placed, runways were laid for the buggies, and finally the slab concrete was cast.

Concrete was poured in the morning. Crews averaged between 200 and 220 cu yd of concrete each morning, about one-third of the 39,000-sq ft floor.

The concrete, mixed in transit, was quick setting. The contractor used 7 or 8 bags of cement per cubic yard, and 1 or 1½% calcium chloride, depending on whether the temperature was above or below 70 F. As a result, the finishers were able to complete their work by 4 pm, eliminating the overtime pay and night lighting that would have been required with slower setting concrete. Also, the layout men could start work that afternoon on the next story.

• Form bracing eliminated. The following morning, erection of column forms began. First step was to nail four 1-in. boards to the concrete slab around the perimeter of each column. These eliminated the need for braces at the bottom of the form, which was made up of boards.

The high early strength of the concrete enabled forms to be stripped in six days. However, the Washington code requires that after November 1 concrete floors of this span must be supported for 21 days, hence, about every third or fourth plywood panel was left shored up, as required.

Quebec House No. 2 is similar in design to No. 1 and is being built by the same methods.

Apex Construction Co. is the general contractor, with R. N. Fleming in charge. S. D. Moses Construction Co. is the concrete subcontractor, John T. Edmunds is concrete superintendent on Quebec House No. 1 and Raymond G. Curry on No. 2.

Architects Edwin Weihe and Katherine Gibbs, of Washington, D. C., designed the Quebec House Apartments. Jacob Feld, of New York City, was the consulting engineer on structural design.

A contracting problem solved by insurance company's research

Will My Blasting Damage Property?

THE CONTRACTOR asks: "How big can my shots be without hurting that building?"

The Property Owner asks: "Will that contractor's blasting damage my building?"

A quick answer to the property owner is: "Your building should stand five times the shock that will scare you." This answer and an answer to the contractor's query result from research by Liberty Mutual Insurance Co., Boston (reported by T. J. Crandell, assistant vice president, in the Journal of the Boston Society of Civil Engineers, April, 1949.)

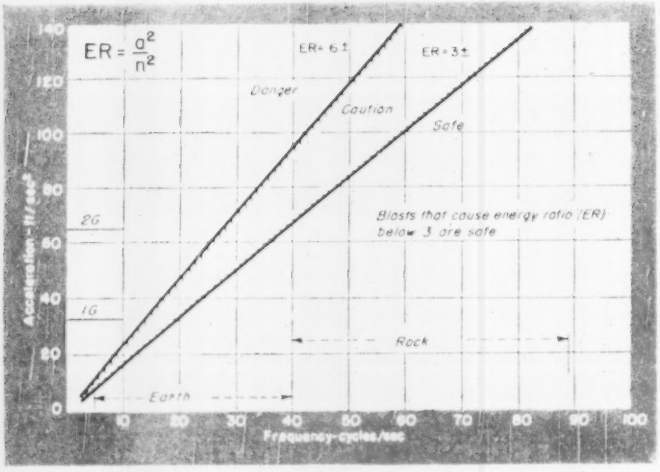

ENERGY RATIO limits for various acceleration-frequency relationships, showing how the caution zone (ER = 3 to ER = 6) broadens as frequency increases.

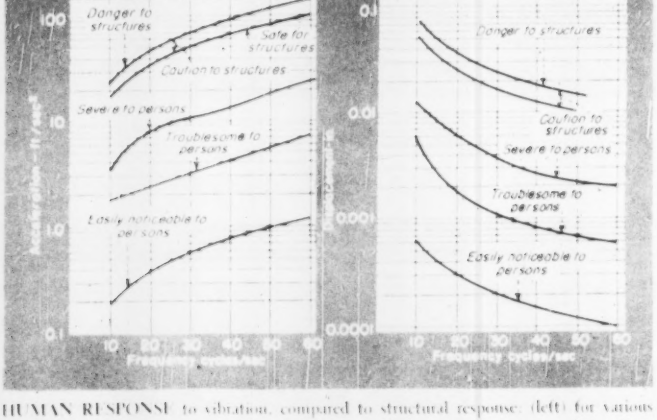

HUMAN RESPONSE to vibration, compared to structural response (left) for various acceleration-frequency relationships (right) for displacement-frequency relationships.

The answer to the contractor is a bit more complicated. A safe charge delivers an energy ratio (*ER*) less than three at a building. *ER* is a function of acceleration (a) and frequency of vibration (n), which in turn depend upon the explosion-to-building distance (D), the weight of explosive (C) and a ground transmission constant (K):

$$ER = \frac{a^2}{n^2} \qquad (1)$$

$$ER = \left(\frac{2\pi}{D}\right)^4 C^2 K \qquad (2)$$

$$\frac{a^2}{n^2} = \left(\frac{2\pi}{D}\right)^4 C^2 K \qquad (3)$$

A safe charge is computed with (2) by giving *ER* a value of 3, and solving for C.

The constant, K, ranges from .001 (hard rock) to .008 (swampy ground). It is obtained by first placing an accelerograph 50 ft from a known explosive charge, then detonating the charge. Weight of explosive (pounds), distance (feet), acceleration (feet per second squared) and frequency (cycles per second) are substituted in (3), which is solved for K.

The accelerograph, an instrument that was developed for this research, records frequencies (n) and relative amplitudes in three planes. Amplitudes are translated into acceleration (a) for use in computing K.

K also can be computed with frequency-displacement data obtained from a portable seismograph. The formula in this case is:

$$16\pi^4 D^2 = \left(\frac{2\pi}{D}\right)^4 C^2 K \qquad (3a)$$

in which D is displacement, in feet.

Charges based on the formulas are sufficient to break up effectively the materials encountered in this research program.

• **Tests that led to answers.** The formulas are empirical, based on blast-accelerograph distances of from 25 to 250 ft, and charge weights of from 1 to 100 pounds. In all cases the instrument was on the ground surface or in buildings. In each test series, either the distance or the weight of explosive was constant. The effect on structures was a matter of observation, supported by the literature of other research.

Human-response data came from other research.

Instrument readings showed that frequencies as low as seven cycles per second occur in swampy ground; 20 in hard clay and approaching 90 in the hardest rock. The first chart shows how acceleration can increase as frequencies become greater, in accordance with equation (1). Also how the margin of caution broadens as the ground gets harder. The caution zone lies between an ER of 3 and an ER of 6. The ER of the destructive earthquake that shook Long Beach, Calif., in 1933, was 9.)

• Delays don't build up effect—The possibility of one-second delays creating a cumulative effect on structures was investigated and found to be nonexistent. The characteristic shock wave reaches maximum amplitude in the first few cycles, then quickly damps out. Hence, under the least favorable conditions a single blast's effect terminates during the delay before the next charge goes off.

However, when by accident two delays let go at once, the effect is four times that of a single delay (the weight-of-charge is a squared quantity in the ER equation).

For example, in one test there was a simultaneous blast of enough delays to run the ER up to 10 at the accelerograph 50 ft away. Canned goods were knocked from the shelves of a grocery 75-100 ft away.

The statement that a building will stand an ER of 3 is qualified by the requirements that the building be of average workmanship and materials, and that no pre-stressing exist. Foundation-wall settlement cracks, which indicate prestressing, will widen under the further stress of an ER equal to 3.

• Owner's reaction to vibration—The vibration causing an ER of 3 is 100 times the vibration that a human can feel; moreover that larger vibration is five times the one that has a severe effect on persons (see second chart). This is the reason for the property owner's concern when the contractor sets off a maximum safe blast. (And it explains the owner's tendency to claim damages that aren't the contractor's fault.)

Part of the severity to persons is due to surprise. The contractor can counteract surprise by warning property owners of a blast's imminence. He also can obtain better owner cooperation by informing the owner that tests have been made to determine the ground constants, so that blasts are limited to insure safety to ordinary structures in the area.

(Copies of Mr. Crandell's paper, "Ground Vibrations Due to Blasting" may be obtained by request from Liberty Mutual Insurance Co., Boston, Mass.)

MILLI-SECOND DELAYS DON'T COMPLICATE THE PROBLEM

F. J. Crandell
(Author of paper abstracted above)

Since the publication of this paper, we have had some opportunities to measure ground vibration due to blasting in which the new milli-second delays were used.

Record No. 9 shows ground vibration resulting from the detonation of 9 lb, 25½ lb, and 19½ lb of dynamite respectively, using milli-second delays as the firing element.

Prints 2, 7 and 4 show the ground vibrations due to shooting of 5 lb, 25½ lb, and 20 lb, using ordinary instantaneous caps.

A visual comparison shows that the milli-second delays, although giving a continuous vibration, produce ground energy ratio in proportion to the number of pounds exploded per delay and thus allow a precise control of ground vibration, the same as was found using ordinary delays.

Moreover, there is evidence that at certain ground frequencies proper use of milli-second delays may further reduce the peaks of vibration curves.

This evidence is found in controlled tests by the Bureau of Mines, showing the possibility of reducing ground vibration by phase interferences. Tests were as follows:

"Small charges were fired 30 ft from the recording station, which comprised three mutually perpendicular seismometers.

"First, a single shot was fired and the vibration recorded. The frequency of one horizontal component was fairly constant, as shown by test 404, A. The firing apparatus was then adjusted so as to have a time delay equal to a half period of the vibration.

"Two charges, each equal to the charge of test 404, were then fired at the same spot with the time delay between them. The resulting vibration record is shown in test 407. Although the vibration (along the component being considered) is not eliminated, a substantial reduction is apparent. (A superimposed on B), especially when it is remembered that the weight of shot 407 was twice that of shot 404."

Milli-second delays have available time intervals of .025, .035, .040 sec. If the ground frequency is 20 cycles per sec., period (P_1) = .05 sec.; then ½ cycle is .025 seconds.

at 20 cycles per sec., P_1 = .05 sec.;
1/2 P_1 = .025 sec.
14.3 cycles per sec., P_2 = .070 sec.;
1/2 P_2 = .035 sec.
12.5 cycles per sec., P_3 = .080 sec.;
1/2 P_3 = .040 sec.

After finding the ground frequencies by tests, it appears probable that the judicious use of these short interval delays can further reduce and control ground vibrations due to blasting.

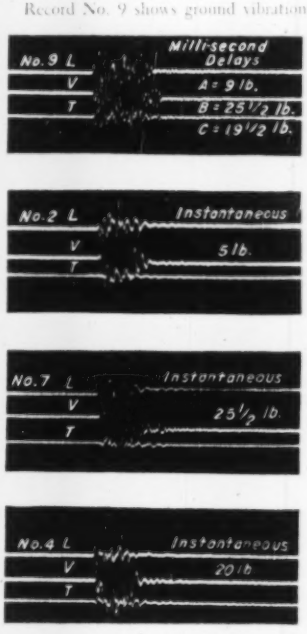

VIBRATION RECORDS comparing milli-second delay blast effects with instantaneous effects. "L," "V," and "T" indicate vibration in longitudinal, vertical and transverse planes.



PHASE-INTERFERENCE test conducted by U. S. Bureau of Mines.

Graphic Method for Determining Widening Of Navigation Channels at Bends

T. G. Thorgeson
Engineer, Jacksonville District
Corps of Engineers, Jacksonville, Fla.

VARIOUS FORMULAS have been developed in this country and abroad for mathematical determination of the widening required at bends in navigable rivers and canals, but they are complicated and vary with navigational uses. Equally satisfactory results can be obtained by the graphical method described here. The method was evolved by the writer when charged with responsibility for specifying the amount of widening at bends in the St. John's River channel between Palatka and Sanford, Fla., when that channel was dredged recently. This method is much simpler than the mathematical method and errors are less likely to occur.

Prior to applying the graphic method for determining the extent of a bend widening, the approach channels to the bend and the channel around the bend are laid out on the survey map on which have been plotted soundings, probings to rock, if any, shore lines, and other topographical information. A channel layout then is selected that is most feasible and economical from the standpoint of navigation, original construction cost, and future maintenance cost.

The accompanying drawing shows one of the bends in the St. John's River that was laid out in this manner, but only the shore lines are included, to avoid confusing details. For navigation purposes a minimum radius of four times the width of the proposed channel is desirable for curves, and simple curves are preferable from the standpoint of layout. However, it sometimes is necessary to resort to compound curves to fit the natural bends of river.

Having laid out the center line so that it meets the criteria set up for the proposed channel, the next step in a graphic determination of the widening that will be required is to select the total length of tow, including the tow boat, that is using the channel or is likely to use it.

This length of tow is determined from a study of local conditions, such as width and depth of channel, type of commodities transported, and equipment used or likely to be used in transporting the commodities through the navigation channel. The St. John's River project between Palatka and Sanford, as authorized by Congress, provides for a channel width of 100 ft and a depth of 12 ft, with widening at bends as necessary. The study indicated that for the proposed channel the probable maximum length of tug and tow will be not over 600 ft, composed of 4 to 6 barges from 60 to 100 ft long. For a maximum length tow we might have:

5 barges, 80 feet long each	400 ft
Tug	50 ft
Tow line	150 ft
Total length of tug and tow	600 ft

The barges used in a 100-ft wide channel are generally not more than 30 ft wide. We used a 40-ft maximum width, which is 10 ft less than half the channel width, and we used this 40 ft width of the whole tow, including tug and tow line, as an additional factor of safety.

The next step was to make a cardboard model of the "Tug and Tow" to the same scale as the plan of the bend under study.

Because tugboat operators use channel markers set by the U. S. Coast and Geodetic Survey as their guides, it was safe to assume that the tug captains would follow the center line of the channel as closely as possible, maneuvering their tows around curves in such a way as to keep within the outer and inner channel limits. Consequently, as the model "Tug and Tow" was advanced around the bend in successive steps, each end of the model was kept centered on the channel center line.

One half the channel width was used as the minimum clearance from center line of channel to channel edge for the long or outer side of bend, thus maintaining the normal channel on the other side. For the short or inner side of the bend the limits were established to fully clear all positions of the model "Tug and Tow". Some additional clearance may be allowed if deemed advisable for the project in hand. The minimum requirement, plus necessary clearance to make straight-line channel limits, was used in the illustration, as this was considered ample for the project.

It will be noted that although the path of the tow navigating a bend is curved, the channel limits are made straight. This is done for simplification of:

1. Computations for horizontal control, and for dredging quantities.
2. Field layout marking the channel to be dredged.
3. Original dredging and future maintenance dredging.
4. Placing navigation aids.

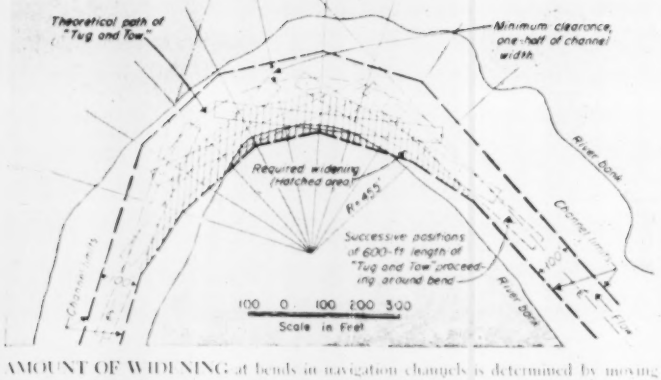
Theoretical path of "Tug and Tow"
Minimum clearance, one-half of channel width
Required widening (hatched area)
R=465
Successive positions of 600-ft length of "Tug and Tow" proceeding around bend
River Bank
Channel limits
100 0 100 200 300
Scale in Feet

AMOUNT OF WIDENING at bends in navigation channels is determined by moving an outline model of the longest anticipated "Tug and Tow" around the curve, keeping the ends of the model centered on the plot of the mid-channel line. The same procedure is followed on shorter curves and at flat intersections of tangents where no curve is required in the channel.

Once the criterion is established governing the maximum length of "Tug and Tow" using or likely to use the channel, and is applied as described, a consistent channel is obtained that can be uniformly navigated with the same ease throughout its entire length, be the bends sharp or broad, short or long.

By using a rigid "Tug and Tow" an ample factor of safety is provided due to the fact that this condition would obtain only for a single vessel of maximum width and length of the "Tug and Tow" used. In actual navigation conditions the tug, tow line, and barges are not as wide as indicated, and in navigating a bend the combined non-rigid tug and tow will swing in a curve approaching the theoretical path of tow shown on sketches. This provides for some shoaling along the channel edges between maintenance dredging operations, and for tows passing in bends. In extreme cases, when two maximum tows meet in a bend, one or both tow lines can be shortened, in which event there will be ample clearance for both to proceed without stopping.

It is believed that due to its simplicity, the use of this method results in a considerable saving (1) of time in channel layout work in office and field, and (2) in excavation quantities due to the fact that no guess work is required in determining the minimum excavation necessary to produce the desired consistent results.

Print Machine Speeds Road Planning

To speed a cooperative zoning program, the Virginia State Highway Department has installed automatic equipment for processing photographic reproductions of drawings. The state is thus spending less time and less money, and getting its zoning plans approved faster.

With the equipment—believed the first of its type for this use in the U.S.—positive photographic reproductions of highway plan and profile drawings are made at a rate of about four linear feet per minute. The method is said to save more than 65 percent of man-hours by comparison with conventional methods.

The need for such reproductions arose last year when work began on the state's new primary highway zoning program. The Department of Highways and the Planning and Economic Division of the State Conservation and Development Commission set up a joint committee on zoning, to present the facts on the value of highway zoning to county officials. With the approval of the county officials, ultimate right-of-way lines are being set up for all primary highways in each county. Based on long-term estimates of future traffic, these ultimate right-of-way lines are used by the boards of supervisors to set up new zoning ordinances, and these ordinances are expected greatly to reduce the cost of acquiring additional right of way as highways are widened.

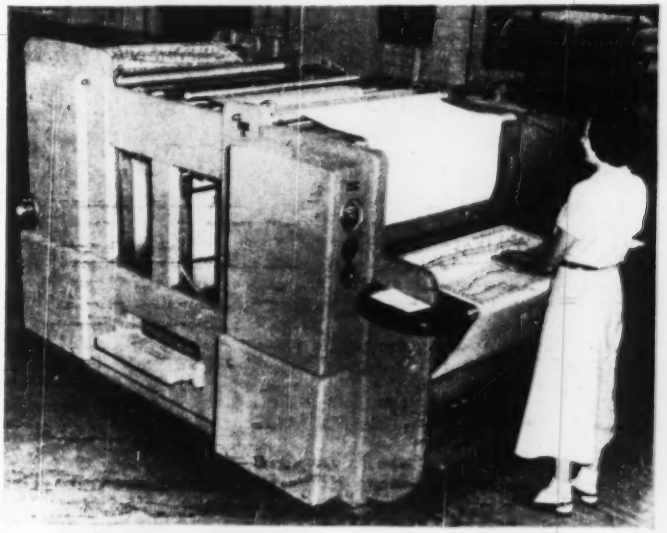

POSITIVE PRINTS OF DRAWINGS used in zoning along Virginia highways are reproduced directly from originals in this machine.

• **New plans needed**—Because existing highway plans were already overcrowded with details, separate sets of plans were needed to put the program into effect. Permanence was a prime requirement, and this led to the decision to reproduce plans photographically.

Granville A. Duke, head of the department's blueprint section, undertook an investigation of reproduction materials and methods. The investigation led to the purchase of automatic equipment suitable both for blueprinting and for processing photographic reproductions on a new type of photographic paper.

• **No negatives**—Unlike conventional photographic materials, this paper produces a positive copy directly from a positive original drawing, without a negative, and may be used in normal room light. The paper is roll-fed into the machine, exposed to a high intensity light source, and processed as it passes through tanks of photographic solutions. The operator simply places the original drawing on the photographic paper and the finished print, dried and ready for use, emerges from the machine in a matter of minutes.

Paper speed is constant, and exposure is adjusted by regulating the light source to yield top-quality reproductions from originals of varying contrast and line density. Good results are obtained not only from ink originals on cloth, but also from pencil drawings on either cloth or vellum. As a test of permanence, a section of a machine-processed print was tacked on a board and placed on the roof of the Highway Department's headquarters in downtown Richmond. Unprotected, and so positioned that it was never in shadow, the print was exposed for 35 days, during which 6.8 in. of rain fell and more than 200 hours of sunlight were recorded. No difference could be detected between the exposed part of the print and other portions which had not been exposed.

Once the photographic reproduction has been made, existing right-of-way lines may be removed with a two-solution eradicator and the new lines drawn in with ink or pencil.

The machine was developed by the Eastman Kodak Co., Rochester, N. Y.

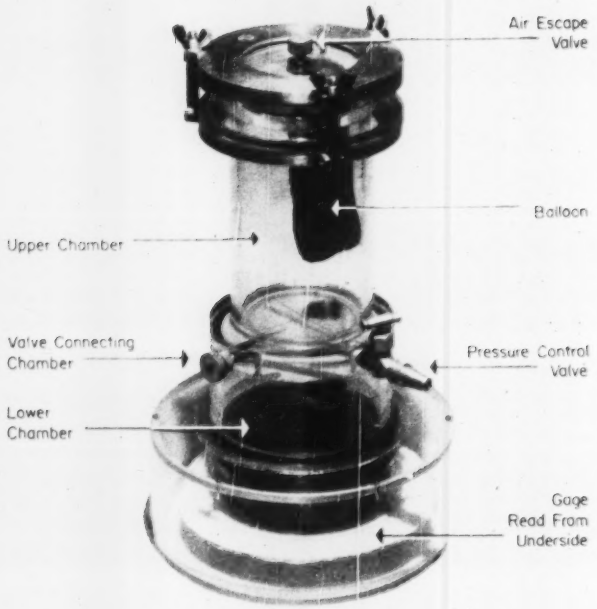

For Soil and Snow Studies . . .

The Volumeter

Quickly Measures Volume By Indicating Pressure Drop

THE VOLUMETER—a compact device for quickly finding volume, specific gravity, moisture content and density of soils and hard packed snows—has been invented by John E. Shea of the Engineer Research and Development Laboratories at Fort Belvoir, Va.

Developed to fill the need for an accurate means of getting snow density, the volumeter already has proved itself for many rapid tests on soil samples.

Its principle is Boyle's gas law:

$$\frac{P_1V_1}{T_1} = \frac{P_2V_2}{T_2}$$

Since the test is completed at a constant temperature, the T values drop out and since the only measurement made is one of change in pressure, no absolute quantities are involved, and only gage pressures need be considered.

In effect, the device does this: It permits a volume of air under a given pressure to increase in volume and records the resultant pressure drop. The change in pressure is a function of the volume of air, which, in turn, depends on the volume of sample material in the air chamber. By measuring pressure drops for several known volumes, Mr. Shea has calibrated the pressure gage to read directly in cubic centimeters volume of sample.

• **Its use.** Here is how you would use the volumeter: Place the sample to be measured in the upper chamber, and raise the pressure there from atmospheric to 15 psi gage with a hand pump. Then, open the connecting valve between chambers, permitting air to expand into the lower one. The pressure drop accompanying expansion activates the pressure gage needle, moving it from 15 psi to some lower value. But since the dial is calibrated in volume of sample, you read your answer directly.

Find specific gravity by dividing dry weight of the sample in grams by the volume in "cubic centimeters" just found.

Then, knowing the surface dry specific gravity of a given sand or coarse aggregate, you easily can figure the weight of excess moisture in a wet sample of the same material.

Let y = weight of moisture
x = dry weight of sample
G = specific gravity of dry aggregate
Then $x + y$ = total weight of sample in grams

$$\frac{x}{G} + y = \text{total volume of sample in cubic centimeters}$$

You can find the total weight on a scale and the total volume in the volumeter, then solve the above equations simultaneously for y, the weight of excess moisture.

Field moisture of soils can be found the same way, using the absolute dry specific gravity determined as above or an estimated specific gravity based on knowledge of soil types. Assumption of 2.65 specific gravity for most soils would result in a small error in moisture content computations.

In clay or other cohesive soils which

GAGE NEEDLE responds to pressure; dial reads directly in sample volume.

cannot be penetrated by air, the sample may be made into a slurry by adding measured quantities of water. After the total volume of slurry is determined, the volume of water added is subtracted, and the moisture content then determined as above.

Bitumen content of a bituminous mix can be determined in much the same manner. If v is the weight of bitumen present and x is the weight of aggregate plus any moisture present, the simultaneous equations will be—

$$x + y = \text{total weight of sample in grams}$$

$$\frac{x}{G_1} + \frac{y}{G_2} = \text{total volume of sample in cc}$$

where G_1 is specific gravity of the dry aggregates and G_2 is specific gravity of the bitumen. Generally, G_1 and G_2 will have been established previously.

• **Density determination**—When it's density you want, put an undisturbed sample in the rubber balloon fitted to the neck of the sample chamber. Use the hand pump to exhaust air from the space between the chamber walls and the balloon through a pressure exhaust valve. The balloon will expand, and you can put any reasonably shaped lump sample inside it. Then build up pressure in the sample chamber to 15 psi. The balloon will close tightly upon the sample, forcing any excess air between sample and balloon out to an escape valve in the chamber cover. Finally, open the connecting valve between chambers and read the sample volume, voids included, on the dial. Divide this volume into the sample's weight and multiply by 62.4 to get density in lb per cu ft.

The gage is calibrated for a plain flat cover and no balloon, so a small correction must be made in the dial reading to account for a change in volume in using the special cover for density determinations.)

• **Method of calibration**—To calibrate his dial so that sample volumes could be indicated by a pointer reacting to pressures, Mr. Shea used a series of standard volumes ranging from 100 to 600 cc in about 50-cc increments.

First, he applied the 15-psi pressure to the upper chamber with the volumeter empty, opened the connecting valve between chambers and observed where the pointer stopped after the pressure change; this was his zero volume reading. Then with the 100-cc standard in the volumeter, he repeated the operation and made the 100-cc mark on the dial where the pointer stopped—and so on up the scale with the other known volumes.

As each volume increment was added, the pointer swung through an arc on the dial. These arcs may be measured by their chords L_1, L_2, L_3, etc., and Mr. Shea found that a plot of the square roots of these chord lengths vs their corresponding volume increments approximated a straight line. From this line L vs $\sqrt{V}$, he was able to pick off chord lengths for intermediate volumes and locate those volumes on the arc of his dial.

Tests with the pilot model have shown it relatively accurate on samples with volumes below 500 cc. But, inserts of known volume can be put in with smaller samples to bring the total volume up into accurately measurable range. The known volume must then be subtracted from the dial reading to get the volume of the sample being tested.

For maximum precision in determining volumes of his standards, Mr. Shea used a water displacement method. He collectively immersed the standard volumes in a tank of water and determined what total volume of water they displaced; this figure was found six times and the mean was taken as the total volume. This, divided into the total weight of the eleven samples, gave the specific gravity of the plastic material of which they were made. Then the weight of each individual sample divided by its specific gravity gave its volume.

Improvements in the device to make it more compact, rugged and portable for field use and the development of further quick field tests employing its principle are currently under study at the Engineer Research and Development Laboratories at Fort Belvoir.

Machine Lining Applied To Large Pipe

PLACING MORTAR LINING by machine in large diameter (120-in.) pipe is under test on the Los Angeles aqueduct. Largest pipe previously lined by these machine methods was a 60-in. line in Boston. However, machine lining has usually been restricted to much smaller pipe.

Conditions of the test were far from ideal. The test section involved riveted steel pipe, that was in some instances out of round as much as 8 in. Rivet heads and bulges in the pipe tended to throw the lining machine off stride. In spite of these obstacles, mortar lining by machine in large size pipe was successfully accomplished.

The 3-in. thick mortar lining is intended to prevent continued corrosion of the pipe. Comparisons will be made with other linings as to cost, smoothness, and dependability. The test section will be checked from time to time to determine bonding qualities, occurrence of cracks and effectiveness of the lining in thin shell pipe subject to repetitive detonation.

Equipment was developed by the Centriline Corp. of New York and the American Pipe and Construction Co., Los Angeles, Calif. The method has been successfully used on smaller diameter pipe including some on the Los Angeles water distribution system (ENR Oct. 17, 1946, vol. p. 506).

Except for size, primary difference between the new and older machines is in the number of trowels. Machines for smaller pipe used two or three trowels, depending on pipe size and quality of finish desired. Only one trowel rotating on a long arm is required in the new machine. Keeping equal pressure on diametrically opposed trowels in pipe subject to deformation ruled out more than one trowel.

A THIN cement-mortar lining was placed in a 10-ft dia section of the Los Angeles aqueduct by this machine. Only one rotating arm was used for troweling.

The mechanical trowel arm follows immediately behind a high speed impeller head. This head throws the mortar against the pipe wall by centrifugal force. It is geared to a traveling carriage so as to assure uniform thickness of lining. The trowel arm is also geared to the impeller head, and the entire assembly is centered on the pipe axis.

• **Yard tests first**—The machine was

first tested in the Mojave yard of the aqueduct on two sections of riveted pipe, one 8 ft and the other 10 ft in diameter. These tests demonstrated satisfactory bonding properties of the cement mortar as well as the ability of the lining to withstand severe deformation with only minor damage.

To arrive at these conclusions, the lined specimen was placed under loading that produced a maximum deflection of 9 in. in the 8-ft dia pipe. Cracking of the lining under this severe loading resulted, of course. However, none of the cracks was more than 0.01 in. wide, and most were fine hairline cracks that closed completely when the load was removed and the pipe resumed its original shape. There was no loss of lining during this test, and subsequent removal of portions of the lining indicated generally good bond with exceptionally strong, hard mortar.

Based on the general success of the yard tests, water department engineers decided to line 1,600 ft of the Antelope siphon pipe with a 2-in. mortar lining. Although this 1,600-ft section of pipe will not be unwatered again until October, aqueduct engineers think that the yard tests indicate the efficiency to be expected.

Plate thickness of this steel pipe is only 1 in. Therefore, first step was to bring exterior backfill against the pipe up to a point 18 in. above the spring line. This was to hold the empty pipe as nearly round as possible.

The exposed portion of the pipe was sprayed continually with water to decrease temperature on the inside of the pipe and thus minimize humidity loss.

Cleaning consisted of the removal of scale, tubercles and dirt by mechanical rotation of chain links followed by subsequent hand brooming. Scale and tubercles in and around riveted joints were removed by hand.

Mortar was one part pozzolan, four parts portland cement and six parts of clean, well-graded sand passing a No. 16 sieve. The resulting mortar was very plastic and workable. Ultimate 28-day strength was close to 5,000 psi.

No particular difficulty was experienced in placing the lining but considerable difficulty arose in troweling it to keep within the maximum allowable variation in lining thickness of plus or minus ¼ in. The mechanical trowel arm was subject to natural vibration that, once started, caused rippling of the finished surface. Some time was lost in trying to overcome this difficulty, but it was never eliminated entirely. The out-of-round condition of the pipe was almost entirely responsible for the rippling.

The ripples were longitudinal with the pipe and any single such ripple, or wave, was about 12 in. long or about the length of the steel trowel. They varied in depth up to a maximum of ¼ in. The larger undulations in the lining were removed in follow-up hand finishing. However, the great majority of these irregularities were not of sufficient consequence to require removal.

• **Curing conditions**—The minimum curing period was five days before the pipe was refilled with water. During this time, ideal curing conditions obtained inside the pipe. The water spray on the outside of the pipe kept the inside cool, and while the placing machine was operating, a heavy fog filled the pipe—particularly near the machine. This fog condensed on the walls of the pipe aiding the curing. However, it had to be swept off the pipe ahead of the placing machine to prevent adverse effect on the water-cement ratio of the mortar.

The mechanical lining operations were followed up by hand finishers who dressed up around rivet heads, finished areas where the pipe plate was too badly buckled to allow mechanical troweling and rough spots.

Improvement of hydraulic characteristics of the pipe was only secondary to protection of the steel. However, piezometric taps were provided to observe the effect of the lining on flow coefficient. Results showed that the slope of the hydraulic grade line through the lined section was reduced to about half that in the remaining portion of the steel pipe where no work had been done. Value of Manning's "n" was reduced from 0.0176 to 0.0125.

This test program was conducted by the Los Angeles Department of Water & Power, Samuel B. Morris general manager and chief engineer. General supervision of the work was under Burton S. Grant, assistant chief engineer of waterworks, who was represented on the job by R. V. Phillips.

Contractor was the American Pipe & Construction Co. represented by Robert C. Sargent, manager, Centriline Division. The contractor is a licensee of the Centriline Corporation of New York.

Tests With Wood Reinforcing Bars

FROM HUNGARY comes a report on tests of concrete reinforced with wood. Here are conclusions of the studies made: (1) Wood is an effective reinforcing material (2) decay of wood properly embedded in concrete is not probable, (3) wood-reinforced, precast concrete piles are less breakable under the hammer than those with steel.

These conclusions were drawn and reported to ENGINEERING NEWS-RECORD by Charles Szechy, chief engineer of the highway bridge department in Hungary's Ministry of Transport. His experiments included actual installations of wood-reinforced concrete structures. Example: a 30 x 13-ft. caisson in which a 70 percent saving in steel was realized by using wood.

In design of test beams, concrete and wood were assumed to have the same modulus of elasticity; concrete was allowed a 5,000 psi compressive stress, and design tensile strength of the silver fir used was set at 2,000 psi.

Most beams tested failed, due to direct tension rupture of the wood reinforcing; compressive stress in the concrete averaged about 4,000 psi. at failure of the wood. Slip of bars was prevented by use of steel stirrups.

It was found that wood longitudinal reinforcing could even be placed completely outside the concrete—below the bottom of the beam—without serious slippage, if properly tied in to the concrete with steel stirrups. However, fewer stirrups were required when wood was within the concrete.

To prevent swelling of wood, reinforcing was pre-soaked.

Bond was measured at 100 psi. before the soaked wood began to dry and 15 psi., a nearly insignificant figure, after drying.

Concrete cover to prevent decay of wood reinforcing should be at least 1.5 times the thickness of the wood, according to test findings. This is considered sufficient for all indoor structures; use of wood reinforcing in structures exposed to severe weather conditions is not recommended on the strength of these early tests.

Since wood and concrete have nearly equal elasticity, piles precast of the two materials for a quay wall adjoining the Arpad Bridge in Budapest were found less prone to breakage in driving than conventional piles with steel longitudinal rods.

In precasting these piles, metal shoes were tied to the concrete by steel bars in the conventional way, but the steel bars were short and were replaced by wood for the greater part of the piles' length. Maximum length of the piles (20 to 25 ft.) was limited by bending resistance during handling.

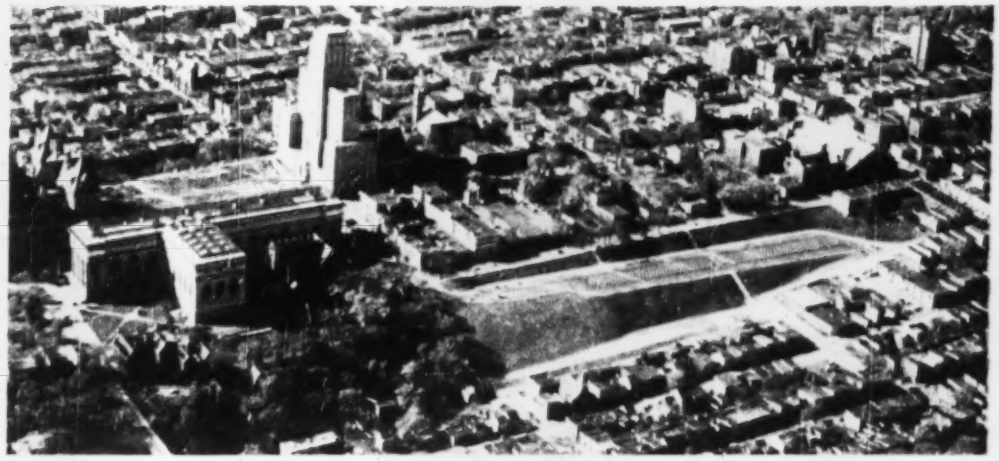

Rebuilt playground, paved and marked for traffic control, solves problem of . . .

Parking in Congested Business Area

STATE AND BUSINESS EMPLOYEES in Albany, N. Y., no longer have to waste time searching for a parking space. The city has turned an old playground into a low-cost, patrolled parking lot. Neither do they have to risk fines and tow-away charges.



THE 115-FT PARKING LOT is paved with bituminous concrete edged with concrete curbing. Top of the fill is protected with a sturdy guard rail.

A day's storage on the lot which is located one block from the Alfred E. Smith office building costs only 35¢. City officials point out in answer to groaning (and for the most part groundless) objections that the fee is as low as possible. It's set at the absolute minimum that will permit self-liquidation—the only method by which the lot could be financed.

• **Cost and capacity.** The parking lot—which was built for about $130,000—was financed by general obligation bonds.

With a capacity of about 340 cars, the lot is now operating at 60-70% of

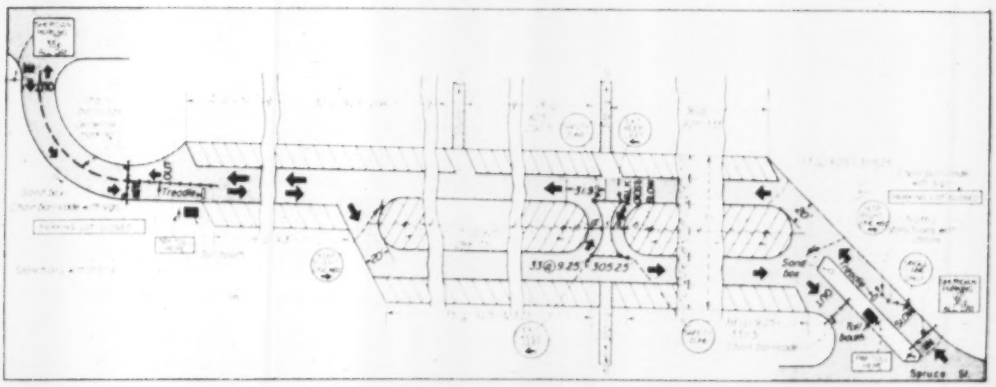

AUTO TRAFFIC is effectively channeled in the 340-car parking lot by pavement marking and easily read direction signs. Cars entering the lot are automatically totaled by treadle counters.

capacity. Since the financial plan calls for 90% use for self-liquidation, the city is making up the difference; it is anticipated that use of the lot will increase this summer so that it will be self-supporting.

The playground on which the lot is built is located along the side of a narrow valley. To give two-end access earth excavated from high points was placed—in 6-in. compacted layers—over the playground to slope longitudinally from the upper to the lower street level. Short exit and entrance gradients are 6.1 and 3.7% while parking-space slopes are 3.3, 1.9 and 2.4%. Side slopes of the fill and cut sections are 2:1.

The eliminated play facilities have been replaced by a new wading pool nearby.

• **Traffic control**—In-and-out travel at the upper end of the lot is channelized by a centerline marking—at the lower by a curbed island. Movement on the lot's 22.5-ft lanes is directed by large white arrows painted on the pavement and large signs on sturdy pipe posts at turning points.

Parking spaces in the two center islands and along the sides of the lot are also painted on the pavement in white. They angle in at 60 deg. Islands are 36 ft wide; side areas are 17 ft.

Toll booths, sand boxes and treadle car counters are located at the east and west entrances. The counters automatically talk number of cars using the lot daily and thus check gate receipts.

The lot is only open from 7 am to 7 pm, and chain barricades carrying a sign "Parking Lot Closed" are provided to shut off both exit entrances.

• **Paving and drainage**—The parking lot is paved with 1-in. bituminous concrete over a 12-in. gravel base with prime coat. Pavement is edged with 9-in. concrete curb adjacent to the top of the fill and a 6-in. next to the cut section. Entrance and exit islands are delineated with 6-in. curbing.

Additional protection against brake-free cars rolling down the fill is provided by a guard rail between the higher curb and top of the fill. The guard rail has two 0.75-in. steel cables on concrete posts, spaced at 10 ft.

Adequate drainage is provided by a small ditch along the bottom of the section in cut and by catch basins connected to storm sewers at all low points.

Pedestrian traffic along the parking lot uses a 5-ft concrete walk parallel to and at the bottom of the inside cut section. Two concrete stairways extend from the lot to the upper level—Elk St.; another to the lower street level.

• **Personnel**—The parking lot project was carried out under the direction of Mayor Erastus Corning II by City Engineer Arthur L. Busia. It was designed by Parsons, Brinckerhoff, Hall and MacDonald, consulting engineers of New York City. Their representatives were: C. A. Ziegenfelder and Julius Schilkenstead.

Notes on Legal Decisions

Summaries of decisions relating to construction prepared by I. Vernon Werbin, counselor at law and engineer, New York, author of Legal Phrases of Construction Contracts (McGraw-Hill)

No-Damage Clause in Contract

A contractor in Rhode Island brought an action to recover damages resulting from delays caused by the owner, the local housing authority, although his contract contained the following no-damage clause:

"No payment or compensation of any kind shall be made to the contractor for damages because of hindrance or delay from any cause in the progress of the work, whether such delays be avoidable or unavoidable."

The contract also provided that the contractor could obtain an extension of time in which to perform in the event he was delayed in the performance of the contract by the acts of the owner.

The contractor was denied a recovery, the court holding that while ordinarily, where one exacts a promise from another to perform an act, the law implies a counter promise against arbitrary or unreasonable conduct on the part of the promisee. However, the no-damage clause in the contract expressly states that the contractor shall not recover damages because of hindrance or delay from any cause in the progress of the work "whether such delays be avoidable or unavoidable."[1] The court in its opinion stated:[2]

"The language of this provision, though broad in scope, is not ambiguous. As the contract provides for an extension of time if requested by the contractor, it is obvious that the object of the clause was to protect the Housing Authority in an undertaking of such magnitude against the vexatious question, in perhaps innumerable instances, whether any particular delay could have been reasonably avoided by the authority. Had there been no such provision in the contract, the authority would have been liable on the principle of an implied covenant, if unreasonable delay were proven, that is, delay that might reasonably have been avoided in carrying out its part of the contract."

The contractor contended that this provision of the contract simply meant that the authority is excusable for reasonable delay only. As to this contention, the court stated: "This construction of the no-damage clause would subject the authority to the inquiry in all instances of delay whether a reasonable person would have acted differently, thus raising the very question that the clause intended to avoid. In the absence of any claim of concealment, misrepresentation or fraud, the contractor by such construction of the no-damage clause cannot render meaningless an express condition of the contract which it knowingly and freely accepted. As was said by the United States Supreme Court: 'Men who take million-dollar contracts for government buildings are neither unsophisticated nor careless'."[3]

The court in its opinion further stated: "The parties to a contract are free to agree upon any terms that are not illegal. No-damage clauses similar to the one under consideration, which are most frequently found in construction contracts especially when they relate to public improvements, are not ordinarily in violation of law. We concede that such a clause if unambiguous calls for strict application but it cannot be treated as meaningless and futile, as the contractor attempts to do in the instant case. If a party to a contract with such a clause acts honestly within the fair and legal import of its terms, he cannot be deprived of the benefit thereof unless his conduct indicates bad faith or some other tortious intent, as every contract implies fair dealing between the parties. When viewed objectively by persons not in interest the conduct of a party under a no-damage clause similar to the one in the instant cases may seem arbitrary, and yet, as the trial justice apparently believed, such conduct in the circumstances here was nothing more than the honest exercise of reasonable caution."

---

(1) Darcy & Fuhrman v. Housing Authority et al., 72 (Supreme Court of Rhode Island, Aug. 18, 1949).

(2) Wells Bros. Co. v. U. S., 254 U. S. 83, 87, 65 L. Ed. 148.

(3) Curry v. Olmstead, 26 R. I. 462.

FIELD AND OFFICE

Quick Maintenance

To aid the maintenance of the U. S. Air Force's Tyndall Air Force Base at Panama City, Fla., post maintenance officers have developed trailers like the one above that are actually rolling shops for the various maintenance crews.

The trailer here is a quarter-ton plumbing trailer, equipped to operate with lights at night and with a power take-off from either an adjoining building or a mobile power unit to enable use of the grinder, buffer and electric drill mounted on it.

In addition to a three day supply of parts for any type of domestic breakdown, the trailer carries a plumber's snake, closet auger, suction pump and four complete kits of tools.

The trailer and others like it are part of a development credited to Maj. Henry J. Stehling, air installations officer at the base.

Job-Built Dump-Cart and Rake Used at Hungry Horse

Clearing 55 sq mi of Montana forest for Hungry Horse Reservoir, contractors for the U. S. Bureau of Reclamation have devised some useful tools.

After logging operations are through and brush is burned, the dozer-drawn clean-up cart pictured below carries off trash loaded by hand. The simple dumping device makes unloading easy.

In addition to the reservoir area there are roads to be cleared. The custom-built rake (right) is used with a dragline to remove debris dozed back into standing timber when the right-of-way was cut. It drags brush and stumps out to where they can be removed easily without injury to the trees left standing.

Contractors Wixson, Crowe & J. H. Trisdale, Inc., of Redding, Calif., used the dump wagon. The special rake was fabricated in the shop of the Kalispell branch, Industrial Equipment Co.

CLEAN-UP CART THAT DUMPS is drawn and operated by bulldozer.

THIS JOB-MADE RIG bends pipe in the field. Eccentric upside-down saddle on tractor side-crane holds pipe while tackle with two live lines applies bending force. Later model, used on 382-mi Refugio-Crane (Texas) 10-in. pipelines, has four live lines on tackle. Rig was built by J. C. Davis, welding foreman for Evans and James, Little Rock, Ark., contractors.

BIG BACK SCRATCHER rakes up debris in large-scale logging operation.

a 10-TON ROLLER that weighs only 240 lbs.

Super-tamps and finishes 45 to 60 sq. ft. per minute to greater density than a 10-ton roller . . .

bituminous or dry concrete pavement patching, mastic or cement-composition floor base, or earth.

Heated plate hits 1900 blows per minute of over 1250 ft. lbs. each. Puts patches in solidly, sealed, cured, ready for immediate use. Works winter or summer.



Works where a roller can't — flush to tracks, curbs, manholes, walls, factory interiors, confined spaces.

Solves maintenance problem on streets, highways and parking areas; paves new drives, walks, floors. One-man operation, transports on material truck, practically no traffic interference.

Earth-tamping — fast and positively uniform tamping of large areas, ditches, flood walls, etc. Machine will not move until material has been solidly tamped.

Send for catalog and name of distributor

WAYER IMPACTOR

INCORPORATED

12 North Third Street, Columbus 15, Ohio

READER COMMENT

Weatherman Also Watch

Sir: Under "The Construction Week" of your issue of February 9, you pay appropriate tribute to the Corps of Engineer "Flood Watchers". Your readers would be interested in knowing that flood forecasting history was made in the past flood at the Weather Bureau's flood forecasting centers at Cincinnati and St. Louis, where practically "around the clock" alertness has been maintained since late December. Forecasts were prepared for more than 100 points on the Ohio and Upper Mississippi and their tributaries based on current rainfall and river reports from approximately 350 substations. These reports were collected at 13 river district offices and relayed by TWX to the Cincinnati and St. Louis River Forecast Centers. State and crest forecasts were then prepared and relayed back to the 13 river district offices for dissemination. Forecasts were issued from one to seven days in advance of the occurrence and were the most timely and accurate forecasts ever issued in the Ohio and Upper Mississippi systems. Preliminary reports indicate that several million dollars in property damage was prevented because of these forecasts.

MERRITT E. BERNARD
Chief Climatological and Hydrologic Services, U.S. Dept. of Commerce

Sunk Dredge Recovered

Sir: The *Engineering News-Record* issue of December 15, 1949, contained the alliterative and euphonious headline "Lake Bids to Dealt Silted Desilter." The article thus distinguished told of bids received by the Bureau of Reclamation for refloating its dredge "The Colorado," which sank near Needles, California, on the night of November 4, 1949, and commented briefly on the type and function of the dredge, the efforts made immediately by the Bureau's field forces to refloat it, and the salvage method expected to be used under contract. Mention was made of the low bid of $238,000 of the Pacific Bridge Co., of San Francisco which covered only refloating of the craft, and the writer of the article attributed to the Bureau (source of information unknown) an estimate of $300,000 additional cost for reconditioning the machinery and equipment that had been submerged.

The dredge (described in ENR May 31, 1949) was refloated February 15, and moored at the wharf at Needles on February 25, where its machinery and equipment are now undergoing rehabilitation. It is expected to be returned to service during the first half of May.

At the time of the sinking the dredge was headed upstream excavating a channel approximately 150 ft wide and 19 ft deep. Operating on a 3-shift, 5-day week, it was anchored and secured for the week end at 9:40 p.m. Friday, November 4. The maintenance crew, arriving at 8:00 o'clock the following morning, discovered the dredge on the bottom of the 19-ft channel. Only the engine room roof and the pilot house were visible above the water.

Being caught with your dredge down, so to speak, is not a situation conducive to leisurely contemplation or languorous meditation. An immediate and vigorous attempt was made to refloat "The Colorado." Divers and necessary equipment were moved to the site in record time. The dredge hull is made up of a bolted assembly of steel pontoons with closed pontoons on the outer rows. The initial action consisted mainly of efforts to close various openings in these outer pontoons so that buoyancy could be restored, at least sufficient to permit pulling the dredge into shallow water. But the Colorado River, in keeping with its character as an unpredictable and capricious stream, suddenly shifted its current burying the hull in sand and silt before the plan of salvage, which promised better than a gambler's chance of success, could be effected.

Comments and observations, both formal and informal, prevailed in proportion to the spread of the news of the sinking. Despite the Bureau's long established policy of contracting its work and its careful study backed up by the recommendations of an independent board of dredging consultants before decision was reached that the nature of the work to be done and the requirements for specially designed equipment dictated performance of the continuing job of river channelization and maintenance by government forces, the Bureau was accused of improper experimentation and bureaucratic invasion of the fields of private enterprise. It had "rushed in where * * * *" with the consequence that a "million dollar dredge" was lost and another million or so was about to be spent in a futile effort at recovery. It was even suggested that the dredge be left forever buried in its grave of sand

(Continued on page 49)

K&M *"Century"* ASBESTOS CORRUGATED WALLS

NOT PERISHABLE

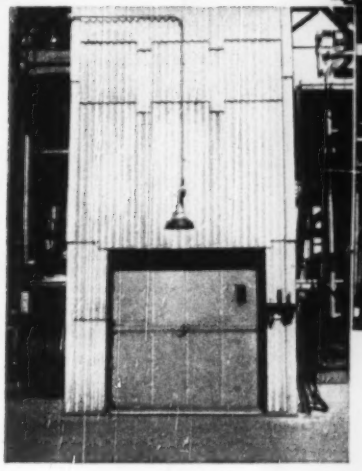

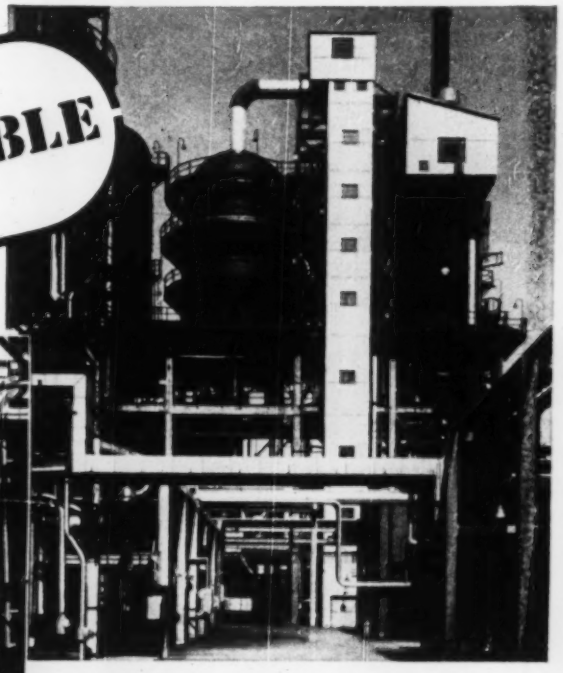

Mid-Continent Petroleum Corporation Refinery, West Tulsa, Oklahoma.

Elevator Tower and Penthouse protected by K&M "Century" Asbestos Corrugated, applied with "TOP-SIDE"* Fasteners.

Industrial and commercial building walls need a rugged constitution. That's exactly why K&M "Century" Asbestos Corrugated walls are bound to be an economy for you. They provide all the structural strength and staying power of the proved K&M Asbestos-Cement combination. They shed extremes of weather and other atmospheric threats, without even needing paint. They defy fire, rust, rot, rodents and termites. You can plainly add it all up to long-term freedom from maintenance.

Initial savings are just as plain, for K&M "Century" Asbestos Corrugated goes up fast, no special work needed. Fitting is easy with ordinary cutting and drilling tools. Even scaffolds and extra labor can be eliminated by using "TOP-SIDE"* fasteners. They're made so that K&M Corrugated can be anchored to steel members of any type, on sides or roofs. You'll have protective enclosure—and cost figures—that keep on looking good.

Write for the name of your nearest K&M Distributor, and full data on K&M "Century" Asbestos Corrugated.

*H. & B. Enterprise Corp.

Nature made Asbestos . . . Keasbey & Mattison has made it serve mankind since 1873

KEASBEY & MATTISON

COMPANY • AMBLER • PENNSYLVANIA

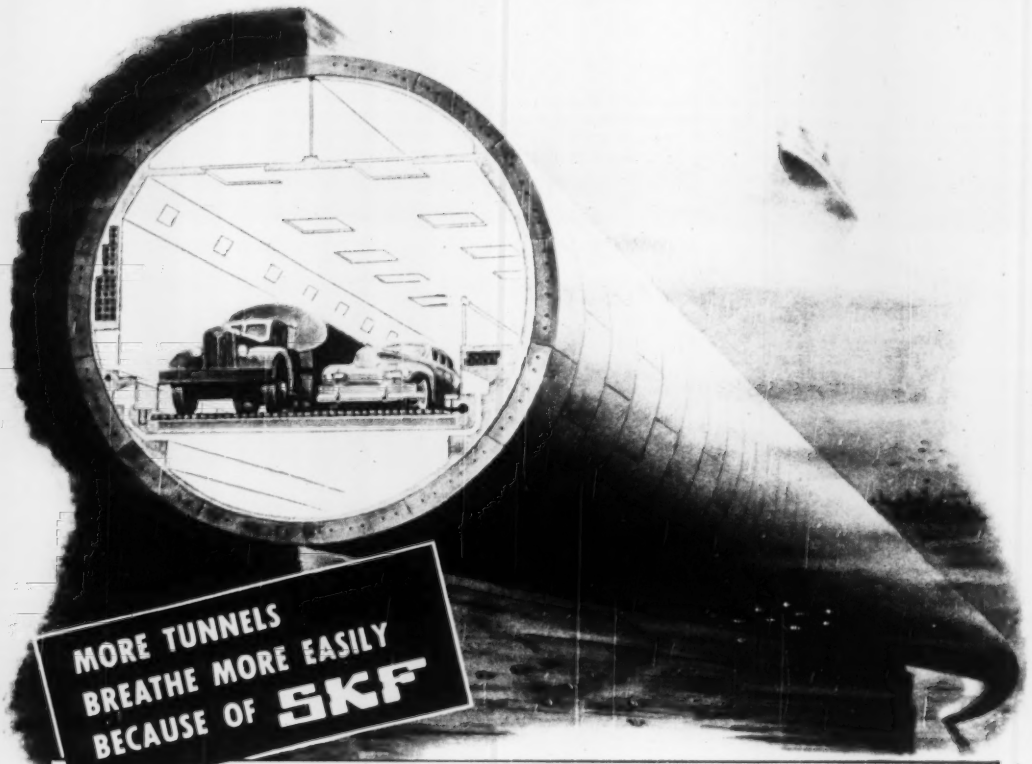

MORE TUNNELS BREATHE MORE EASILY BECAUSE OF SKF

TYPICAL SKF VEHICULAR TUNNEL INSTALLATIONS

Location	Number of Fans	Fan Manufacturer
LINCOLN TUNNEL, New York – South Tube	36	Buffalo Forge Company
LINCOLN TUNNEL, New York – North Tube	20	Westinghouse Electric Corp. – Sturtevant Division
QUEENS MIDTOWN TUNNEL, New York	46	Westinghouse Electric Corp. – Sturtevant Division
GEORGE WASHINGTON BRIDGE APPROACH TUNNEL, New York	8	Buffalo Forge Company
PENNSYLVANIA TURNPIKE – 7 TUNNELS	26	Westinghouse Electric Corp. – Sturtevant Division
BANKHEAD TUNNEL, Mobile, Ala.	3	Clarage Fan Company
BROOKLYN BATTERY TUNNEL, New York	53	Westinghouse Electric Corp. – Sturtevant Division
BROOKLYN BATTERY APPROACH TUNNEL, New York	12	Westinghouse Electric Corp. – Sturtevant Division
WASHBURN TUNNEL, Houston, Texas	5	Westinghouse Electric Corp. – Sturtevant Division



SKF Spherical Roller Bearings have been specified for most of the major tunnel-fan installations because they're self-aligning . . . long-lived . . . require infrequent lubrication and inspection . . . give continuous trouble-free service under highly adverse conditions. SKF Industries, Inc., Philadelphia 32, Pa., the Pioneers of the Deep Groove Ball Bearing, Spherical Roller Bearing, Self-Aligning Ball Bearing. 7073

SKF
BALL AND ROLLER BEARINGS



(Continued from page 46)
and silt, washed over by the cool, caressing currents of the Colorado, as a permanent reminder of what happens to those foolish enough to venture into the realm of the "experts."

It was obvious that raising the dredge after it was silted and sanded in would be a major undertaking. Several contracting firms experienced in salvage operations were invited to view the sunken dredge and meet in Boulder City with Bureau officials to discuss preparation of specifications under which bids would be received covering the work of refloating. These contracting firms were Pacific Bridge Co., Portland, Ore.; Peter Kiewitt Sons Co., Los Angeles; Morrison-Knudson Co., Portland and Los Angeles; and Utah Construction Co., San Francisco. A representative of the firm of Pillsbury and Martignoni, well known salvage experts of San Francisco was also present. Specifications were issued November 26 and bids received December 7. Only two firms, Pacific Bridge Co. and Peter Kiewitt Sons responded with bids of $238,700 and $247,960 respectively. An engineer's estimate, based on a plan suggested by Mr. Martignoni, was $95,000; a similar estimate by the Office of River Control providing for the use of steel sheet pile cofferdam, was $115,000.

In view of the wide margin between the bids received and the engineer's estimate it was decided to proceed with government forces and equipment under the immediate direction and supervision of the firm of Pillsbury and Martignoni. W. E. Martignoni and W. M. Cathey personally directed operations. The dredge was refloated, on February 18, 1950 and moored at the Needles dock about 3 miles distant on February 28. Subsequent investigation indicated that the primary cause of the sinking was entry of water into the No. 4 pontoon through a stuck open check valve on the bilge eductor line.

This is how the job adds up: The cost of refloating by Government forces including fees paid to Pillsbury and Martignoni, whose services were outstanding, was $80,000 or $158,700 less than the lowest of the two bids received for this operation. Transportation back to the Needles wharf was $4,000, and the Bureau estimates $75,000 will be required to completely rehabilitate and put the dredge back into first class operating condition. ($225,000 less than the quoted ENR estimate mistakenly attributed to the Bureau).

E. A. Moritz
Regional Director
Bureau of Reclamation
Boulder City, Nevada

CONSTRUCTION PROFITS

WAGNERMOBILE
SCOOP
MODEL C

FAST • ECONOMICAL

The versatile Wagnermobile Model "C" Scoop saves time and labor costs with its many efficient uses in the construction field. "Quick-change" attachments mean extra profit on every job. Saves time and labor of bringing in "extra" equipment. Maintenance is minimized.

- Transports, elevates and pours concrete.
- Lifts heavy equipment.
- Lifts and places forms or timbers.
- Shovels, loads and transports dirt or bulk materials.

ATTACHMENTS INCLUDE:
Scoops in 5 sizes—¾ cu. yd. swivel type concrete hopper with 90-degree swing right or left. Lift Fork with 2, 3 or 4 prongs. Special fork with tines for fertilizer or hay. Crane Boom. Track extensions up to total of 26 feet.

FEATURES INCLUDE:
Power Steering . . . Planetary Drive

WRITE TODAY FOR LITERATURE AND YOUR NEAREST DEALER
Wagnermobile Model "C" Scoop also available with Chrysler Fluid Drive.

We reserve right to make improvements in design and specifications without notice.

MIXERMOBILE MANUFACTURERS

WAGNERMOBILE

Box 7527 • Portland 20, Oregon

the 3C's of SUCCESS

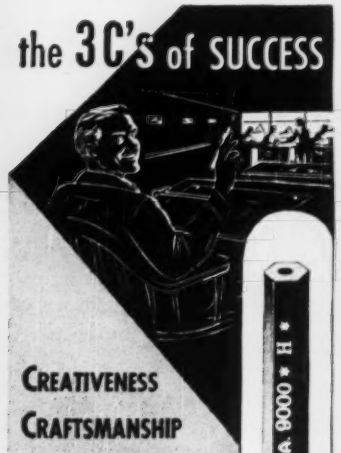

CREATIVENESS
CRAFTSMANSHIP

CASTELL
world's finest drawing pencil

with the Genuine
IMPORTED
CASTELL
lead

CASTELL is first choice among the Masters in architecture, engineering, designing and drafting. So smooth, so free-flowing, it's an inspiration to genius.

CASTELL's 18 degrees are so uniformly exact, you can start a drawing one year and return to it the next—and be sure of identical, undeviating tone.

Naturally, CASTELL costs a few pennies more—but it lasts so much longer than ordinary pencils that it's more economical in the long run.

Follow the example of the Masters. Insist on CASTELL—and don't allow yourself to be talked into a substitute.



A.W. FABER-CASTELL
PENCIL COMPANY INC NEWARK 4 N.J.

DEVELOPMENTS ABROAD

SCOTTISH HYDRO DEVELOPMENT—Dunlastair Dam, pictured above, is only one small part of the system of power development being made by the North of Scotland Hydro Electricity Board, which has the sole right of developing hydro power in Scotland. This little dam checks the Tummel River, allowing 85 cu ft of water per second to pass to keep alive the salmon fisheries for which the stream is famous, but its chief purpose is to divert the bulk of the water into an open aqueduct (extreme left) to supply another hydro station. Scotland's surface waters, it is estimated, offer 6,274,000,000 kwh of potential electricity annually, in addition to the 1,500,000,000 kwh already developed. (Eastern Publishers Service photo.)

Rio Doce project still stumbling

When the Companhia do Vale do Rio Doce was reorganized recently, U. S. engineers in Brazil held their breath. It looked as though the Brazilians again were going to have trouble with the most troublesome development project in Latin America (ENR Dec. 30, 1943, vol. p. 954).

The company, 85 percent owned by the Brazilian government, operates the rich Itabira iron mines in the state of Minas Gerais and the 375-mi single track, narrow gage Victoria-Minas railway which connects the mines with the sea. Ever since 1942, U. S. and Brazilian engineers, backed by three Export-Import Bank loans totaling $76,500,000, have been trying to rebuild the railroad and get Itabira iron ore out to a point where it can go into the world market.

• Railroad needed. Some U. S. engineers think less than highly of the railroad. Before the war, when the British owned both the mines and the railroad, one train a week struggled each way over the steep grades and hairpin turns that is, when torrential seasonal rains didn't block off the road with landslides.

The British turned over their holdings to the Brazilian government during the war in return for a promise of some badly needed iron ore. The U. S. stepped in with loan money and engineering help. But the Brazilians were left to get things done, construction-wise.

The problems of leveling the grades, easing out some of the worst curves and insuring against landslides were tricky enough. But when the Brazilians chose to staff the company with political cronies of the regime, progress actually came to a standstill. An engineering job that might have taken two years still not complete after eight.

Last month, directors of the Ex-Im Bank went into a huddle over the bank's biggest, problem child. What worried the bank's directors most was how they could ever expect to get their money back. The first Ex-Im loan of $14,000,000 was to be repaid from royalties.

• Can it pay off? Some observers doubt that enough ore will ever pass over the railroad to pay off the debt. A landslide that occurred last spring virtually stopped traffic over one section of the road during 1949. A tun-

(Continued on page 55)



Proof...



Dorena Dam
U. S. Corps of Engineers
Dorena, Oregon
Proof . . . that you use less Protex!

Walla Walla Dist. Corps of Eng. Photo

McNary Dam
U. S. Corps of Engineers
Plymouth, Washington
Proof . . . that the larger projects specify Protex!

. . . that Protex AIR ENTRAINING AGENT costs less to use!

Angostura Dam
U. S. Bureau of Reclamation
Hot Springs, South Dakota
Proof . . . of Protex leadership in Air Entraining Agents!

When you're pouring millions of yards of concrete, every penny saved means a lot. That's why Protex Air Entraining Agent is used in so many large dam projects . . . proof of the quality of Protex . . . proof that it actually takes less Protex AEA than other admixtures! Protex AEA meets the requirements of Specifications SS-C-192, ASTM Spec. C-175-48T, is widely used by Bureau of Reclamation, U. S. Corps of Engineers, Bureau of Public Roads. Write, wire or phone for complete information!



Ft. Gibson Dam
U. S. Corps of Engineers
Muskogee, Oklahoma
Proof . . . that Protex gives consistent control!

Protex is specified by more large projects . . . because Protex brings CONSISTENT results—at lower costs!

AUTOLENE LUBRICANTS COMPANY

INDUSTRIAL & RESEARCH DIVISION
1339 W. EVANS AVENUE
DENVER 9, COLO.

AUTOLENE LUBRICANTS CO.
1559 W. Evans Ave.
Denver 9, Colorado

Please send free booklet, "Facts on Modern Placement of Concrete through Air Entrainment."

Name_____

Address_____

City_____ State_____

"Where efficiency and economy are 'musts'..."

experienced contractors choose 'MS' Delay Electric Blasting Caps!"

"When the job demands careful blasting with maximum efficiency and economy . . . you really appreciate Du Pont 'MS' Delay Electric Blasting Caps.*

"There are several reasons. For one thing, these caps pull rounds clean . . . leave no dynamite in the muck. There's no mistaking delays in hook-up, either. For every delay period is clearly printed, easy to read in even the poorest light.

"What's more, blasting with 'MS' Delay Caps greatly reduces concussion and vibration, yet gives excellent fragmentation in hard or soft rock work. They're easy to handle, easy to work with."

They save on dynamite costs, too. Dynamite charges can usually be reduced when Du Pont "MS" Caps are substituted for regular delays!

In outside work, Du Pont "MS" Delays cut down vibration, greatly reduce backbreak and so improve fragmentation that a lot less secondary blasting is needed.

Why not do as many experienced contracting men have done—switch to Du Pont "MS" Delay Electric Blasting Caps for your next job?

ASK ANY Du Pont Explosives representative for complete information about "MS" (Millisecond) Delay Electric Blasting Caps. He'll be glad to help you with any blasting problem you may have. E. I. du Pont de Nemours & Co. (Inc.), Explosives Department, Wilmington 98, Del.

**Available in fourteen millisecond intervals of delay: MS-25, -50, -75, -200, -125, -150, -175, -200, -250, -300, -350, -400, -450, and -500.*

DU PONT EXPLOSIVES

Blasting Supplies and Accessories

DU PONT

BETTER THINGS FOR BETTER LIVING . . . *THROUGH CHEMISTRY*

net, being driven through the slide, would open the road again in a few weeks. But there are other problems. One permanent obstacle: The rapidly developing river valley is taxing the railroad with farm goods and other traffic that won't move over to let iron ore go through.

Some Brazilians have talked of building a new, standard gage railroad parallel to the present line. This would cost some $175 million—and the U. S. would have to chip in a lot of it.

Washington shows no sign of listening to these suggestions. Under the new organization of the company, there will even be less chance. The new statute gives the company's president wide new powers at the expense of the board of directors. Two Export-Import Bank consulting engineers are on the board.

Robert K. West, Ex-Im Bank's key man on the Rio Doce project right from the beginning, is back in Washington now, reporting in. West doesn't foresee any new troubles under the new company set-up. He is optimistic that the railroad will be in full operation soon. He says the road has been tested successfully with a 1,000-ton net load. But it still looks like a long time before Ex-Im Bank will be collecting much in the way of royalties from Itabira iron ore.

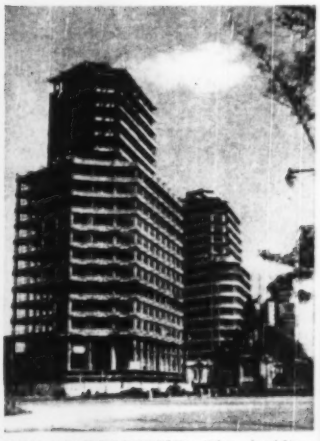

TOO MODERNISTIC?—This building, to be occupied by Recursas Hidraulicos, government agency handling irrigation and dam building in Mexico, has raised a controversy. It is situated on Paseo de la Reforma, the city's most famous avenue, and critics say the bright colored tile designs on its exterior will be an eyesore. A fine arts committee is now studying the project, while the Mexican Society for the Promotion of Arts has asked the government to disregard requests that the bright orange, brown and white tiles be removed from the facades of the new 20-story Irrigation Ministry building.

GOOD PUMPS for good buildings

YEOMANS!

For all basic pumping functions in a building there are Yeomans Pumps that will give long years of quiet dependable performance.

WATER SUPPLY — Since 1898 Yeomans has been solving problems of water supply and circulation in buildings of every kind. Many thousands of successful installations emphasize the soundness of Yeomans Engineering.



CONDENSATION RETURN — Compact design and sound engineering are conspicuous features of Yeomans Pumps in heating systems. They can be depended upon for efficient performance, long life and a minimum of maintenance.



DRAINAGE DISPOSAL — For an end to troubles, install Yeomans Pumps for getting rid of drainage and seepage: Yeomans Heavy Duty Bilge Pump for liquids free from solids, and Yeomans Screenless Ejector for wastes containing solids.



SEWAGE EJECTION — Acknowledged throughout the world as approaching perfection, the trusty Shone* Pneumatic Sewage Ejector is ideal—wherever gallonage is limited and solids are not. Yeomans also builds centrifugal sewage pumps for both wet pit and dry pit installations—in sizes up to 14 inches and capacities up to 24,000 gpm.



Full information concerning Yeomans Pumps, with useful engineering data and installation drawings, is published in Sweet's Architectural and Engineering Files; and also in separate bulletins for your Data File—sent promptly on request. Use the coupon

*TRADE MARK REGISTERED U.S. PATENT OFFICE

YEOMANS

PUMPS FOR BUILDINGS, MUNICIPALITIES, INDUSTRIAL APPLICATIONS — and a complete line of Sewage and Waste Treatment Equipment

YEOMANS BROTHERS COMPANY
1445 North Dayton Street, Chicago 22, Illinois

You may send bulletins as indicated.

☐ Water Booster
☐ Drainage Disposal
☐ Water Circulation
☐ Sewage Disposal

Name _____
Firm _____
Address _____
City _____ State _____

FOR
CONCRETE RESULTS
LIKE THESE

30% Harder Surface
40-100% Better Bond to Steel and Aggregate
20% Higher Flexural Strength
80% Higher Resistance to Injurious Solutions
18% Lower Shrinkage
Higher Resistance to Cracking and Crazing
Higher Resistance to Water, Corrosion, Erosion and Abrasion
plus
Greater Workability, Controlled Set, Faster Placing, Better Finishing

Send for this new book Today . . .



Lists illustrated information and performance data on PLASTIMENT-CONCRETE . . . its greater workability, its greater field economy, its superior results, and its extra durability factors for jobs which require your guarantee. Discusses 14 additional materials of construction, engineered for coating, sealing, hardening and repair work on concrete and masonry. Complete with product descriptions and composition, specific uses, contributing properties and Architect's Specifications. To obtain your free copy, write today or use the coupon below.

Results obtained with PLASTIMENT-CONCRETE, taken from test reports and records of U. S. ENGINEER CORPS, PUBLIC ROADS ADMINISTRATION, SMITH EMERY COMPANY, and other independent laboratories, confirmed by performance records on worldwide installations totaling millions of cubic yards of concrete. PLASTIMENT and other Sika products have been tested and approved on Federal, State and Municipal projects and are approved under Building Codes of principal cities.

Sika
SIKA
CHEMICAL CORPORATION
30 GREGORY AVENUE
PASSAIC, NEW JERSEY

Send me a copy of your new book on materials of concrete construction.

Name _____
Company _____
Street Address _____
City _____ Zone _____
State _____

MUNICIPAL AFFAIRS

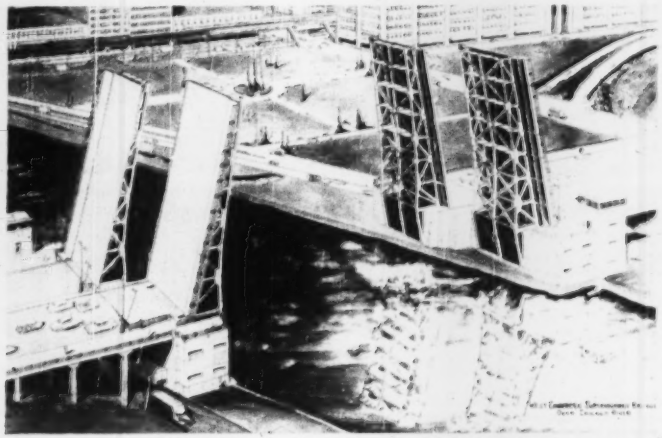

NEW CHICAGO BRIDGE—Engineer's sketch of the first twin, double-leaf bascule bridge over the south branch of the Chicago River for the Congress Street superhighway. Cost is estimated at $3,500,000.

Bridge building plans announced by Chicago

Plans for bridge construction to cost almost $4,000,000 have been announced in Chicago by Stephen J. Michuda, city bridge and viaduct engineer. The projects, to be financed with state motor fuel tax funds, include a twin, double-leaf bascule bridge over the south branch of the Chicago River for the Congress Street superhighway now under construction.

This bridge, to cost about $3,500,000, is designed for two separate 43½ ft roadways. The median on the approaches will be built on casters so that if mechanical trouble develops on one pair of leaves the median can be moved to one side and traffic rerouted to the other pair. Because of the direction of the river the bridge will be offset in alignment.

The substructure will be supported on caissons to bedrock. Its piers will straddle the subway tubes and will carry the reinforced concrete tail pits, whose floors will be 5 ft thick to accommodate the huge counterweights. All of the pier work will be done inside of sheet steel cofferdams.

• Other bridge work. Work has just started on the widening from 36 to 76 ft and reconstruction of the present bridge over the north branch of the river at Irving Park Road. It will have two roadways 32 ft wide, separated by a 5-ft median strip, and two sidewalks. There will be six lanes of traffic. Kenny Construction Co., Chicago, has the substructure contract at $69,540, and John E. Beasley Construction Co., Chicago, for the superstructure at $192,475.

Work will begin soon on a $1,018,000 Laramie Ave. grade separation under the Chicago, Milwaukee and St. Paul Railway tracks. Thomas McQueen Co. was the low bidder on the substructure at $319,425. The railroad will pay $314,000 toward the cost of the underpass, supporting seven tracks on reinforced concrete box-type abutments with steel spans.

A third new open-deck steel grid roadway and asphalt slab-covered steel sidewalks—will be built this summer on the rumson bascule bridge over the north branch of the river at Cortland Street. Cost: $172,300.

The swing bridge over the Little Calumet River at So. Indiana Ave. will be raised 3.6 ft and redecked to permit sufficient barge clearance and stop traffic interruptions.

Water and sewage news

—Latest items of interest in the field of water supply and sewers include the following:

San Diego, Calif.—A $2,500,000 water-distribution system bond issue and an increase in water rates have been proposed by C. W. Campbell, city manager, to avert a critical condition in the water department. The alternate to a water rate increase, according to Campbell, is an increase in tax rates to pay the bond interest, which formerly was paid from the department's

Continued on page 56

ORO MANGANESE STEEL APRON FEEDERS. All wearing parts are Oro-Supermang Steel. Apron consists of Oro-Supermang double beaded, overlapping and interlocking pans with vertical side flanges. Pans cast integral with driving links.



TRAVELING GRIZZLY FEEDER. A heavy duty feeder, by-passes dirt or fines. Consists of a continuous track of 4" diameter tubular steel bars spaced 2½" apart. Driving mechanism with speed reduction. Clutch permits one man control.

Pays for itself every 6 months!

If you've ever pried a wedged rock or tried to clean out a choked crusher, you know how important a good feeder can be. "Most valuable piece of equipment in my plant . . . saves its cost twice a year . . . insures steady production". . . that's the opinion of many experienced operators.

And they're right too. Without regulated feed, crushers are overloaded one minute . . . empty the next. Result—frequent clogging, idle trucks, lower production while a man with a manganese back cleans out the hopper or crusher.

You'll agree, we're sure, that a feeder can be *the most important single unit in many plants.* To fill your most exacting requirements, Pioneer builds three types of feeders for heavy work—Apron, Pioneer-Oro, and Traveling Grizzly—in many sizes. Just check the coupon below for complete details. PIONEER ENGINEERING WORKS, 1515 Central Avenue, Minneapolis 13, Minnesota.

APRON FEEDERS. ½" forged steel pans rigidly supported on wide rollers. Overlapping forged steel pans and sideboards provide a continuous path for material . . . reduce spillage.

Illustrated below is a 170 Series Plant. An apron feeder with flared sideboards, jaw crusher, and power unit are mounted on skids. Can be furnished as a complete primary installation.

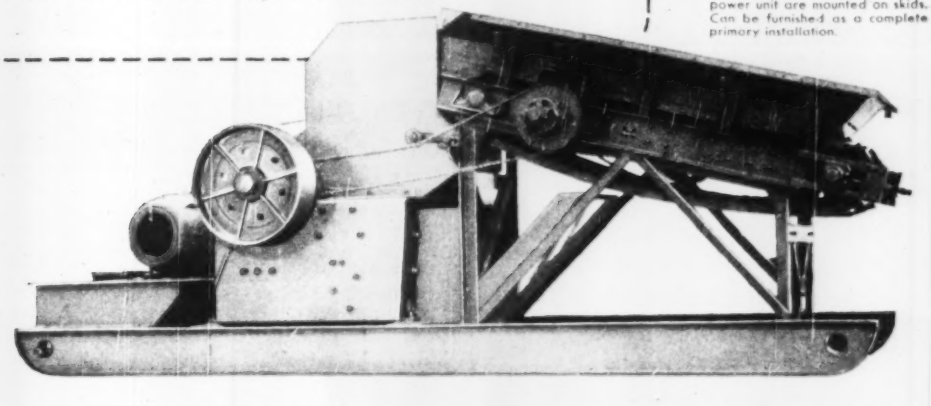

BUY BOTH!

Higher Output, Lower Upkeep!

Pioneer

Continuflo EQUIPMENT

Mail coupon today!

Please send me more information on the following:

PIONEER ENGINEERING WORKS
1515 Central Ave., Minneapolis 13, Minn.

☐ APRON FEEDERS	☐ BUZZER SCREENS (LIGHT DUTY)	☐ GRAVEL PLANTS
☐ ORO FEEDERS (HEAVY DUTY)	☐ VIBRATING SCREENS	☐ ROCK PLANTS
☐ TRAVELING GRIZZLY FEEDERS	☐ REVOLVING SCREENS	☐ WASHING PLANTS
☐ MECHANICAL FEEDERS	☐ ROLL CRUSHERS	☐ BITUMINOUS PLANTS
☐ CONTINUFLO CONVEYORS	☐ JAW CRUSHERS	☐ ROCK TOWERS

Name _____

Company _____

Address _____

City _____ State _____

Ezebilt

The Fastest SCAFFOLDING assembly ever devised!

Ezebilt Mason Panel—used with brackets quickly erects to any height—provides a convenient materials handling area.



ST Standard Panel 2½-3 ft. heights

SS Standard Panel 4-4½-5 ft. heights



SU Mason Panel 4-4½-5 ft. heights

SH Ladder Panel 6½ ft. high

PSW Putlogs—up to 22' x ft. span

Above are sketched just a few of the many basic Ezebilt parts . . . all interchangeable—all assembled with no bolts, no wing nuts, no loose parts.

"Up Faster—no bolts to master"

To erect a scaffolding without losing time working with or looking for loose parts—specify Universal Ezebilt. Everything necessary for assembling the different panels, stringers, and braces is contained right in the "Gravity Lock" . . . just put the units into position and the scaffolding virtually assembles itself.

Note in the Diagram how easy and fast an Ezebilt installation can be made. In the simple "Gravity Lock" design, the side braces and horizontal braces are attached to the panel legs . . . no nuts, bolts, or tools required.



Send for name of nearest distributor—or write for new Ezebilt Catalog

UNIVERSAL MANUFACTURING CORP.
200 NORTH STREET · ZELIENOPLE (Pgh. District) PA.

EZEBILT Tubular Steel Panel Scaffolding, LADDICAST Lightweight Scaffolding, Elevating Towers, Rolling Maintenance Towers, Tubular Steel Brackets, Adjustable Steel Equipment, Indoor Clamp Type Scaffolding.

surplus. Revenue declines, however, are expected this year. An approximate 10 percent water rate increase was indicated. Most householders pay 26.6c for 100 cu ft of water, which is the highest rate of any large West Coast city. The principal improvements proposed under the bond issue would be $800,000 for cement mortar lining of water lines, $400,000 for a north basin at University Heights reservoir, $400,000 for recreational facilities at reservoirs, and $100,000 for a pumping plant.

Napoleon, Ohio—This city is making plans for a new $1,306,000 sewage disposal plant. It will apply for a $55,600 federal loan for planning, and council has approved an assessment of 40 percent of all water bills to create a sinking fund from which to repay the federal loan.

Dayton, Ohio—A bond issue of not less than $4,500,000 will be required to finance a new water filtration plant, reports City Planning Director Herbert Stanck. The city commission is expected to act on the matter soon.

Canton, Ohio—City council recently authorized construction of a $3,600,000 sewage garbage disposal plant, expected to be ready in two years.

Miami, Fla.—A bill is to be presented to the 1951 session of the Florida legislature to permit one or more cities or counties to set up sanitary districts to handle sewage and garbage disposal, and water supply. It is particularly desired to expand the sewage disposal system of Miami.

Illinois—Plans for proposed improvements to public water systems in eight Illinois municipalities have just been approved by the division of sanitary engineering of the State Department of Public Health. The State Sanitary Water Board has granted approval for improvements which will eliminate the discharge of untreated sewage from Freeport into the Pecatonica River. The approved proposed waterworks improvements are at Zeigler, Martinsville, Aurora, Taylor Springs, Des plaines, Danville, Downers Grove, and Evergreen Park.

Covington, Tenn.—A 50c minimum monthly sewer charge, as well as a substantial increase in the water rate, has recently been inaugurated here. The new sewer charge is based on the amount of water consumed and is to be added to all water bills. The schedule is as follows: First 5,000 gallons used, $.50; next 5,000 gallons, $.40; next 5,000 gallons, $.35; next 5,000 gallons, $.25; and all in excess of 25,000 gallons, $.20 per 5,000. The new water rate calls for a minimum charge of $1.20 the same as previously but the minimum amount has been reduced from 4,000 to 2,000 gal.

MEN AND JOBS

George W. Roundtree has joined the Gaston County Health Department at Gastonia, N. C., as senior sanitary engineer. A graduate of the University of Southern California, he served during the war as officer in charge of malaria and mosquito control with Gen. Douglas MacArthur's General Headquarters Staff in New Guinea and with the Air Corps in the China Burma India Theater. Since leaving the service, he has served as senior sanitarian with a city-county health unit at Colorado Springs, Colo., and with the North Carolina State Board of Health, and recently completed requirements for a master's degree from the University of North Carolina School of Public Health.

H. R. Jensen has been named flood control engineer for Harris County, Tex., to succeed **R. J. Putney** who will open his own engineering office in Houston. Jensen formerly was with the district Army Engineer's office at Galveston.

Lieut. Col. Herbert C. Gee, assigned as assistant chief of civil works in charge of the nationwide flood control program, has announced his resignation from the Army. He will soon

(Continued on page 59)

A. L. Saunders, left, resident engineer for Corps of Engineers, Del E. Webb, center, company president, and J. N. McPhee, Del E. Webb Construction Co. job superintendent, inspect progress of $4,000,000 Veterans Administration hospital under construction at Phoenix, Ariz. Work, slowed by steel strike delays, now is advancing rapidly.

While attending Purdue's Industrial Waste Conference, R. E. Horton, sanitary engineer with the Ohio River Valley Water Sanitation Commission, J. F. Kinnaman, research engineer at Purdue, Ralph Holtje, chief of stream pollution section, and L. A. Emelity, asst. sanitary engineer, both of the Indiana State Board of Health, left to right, get together to check the report on the Wabash River pollution survey.

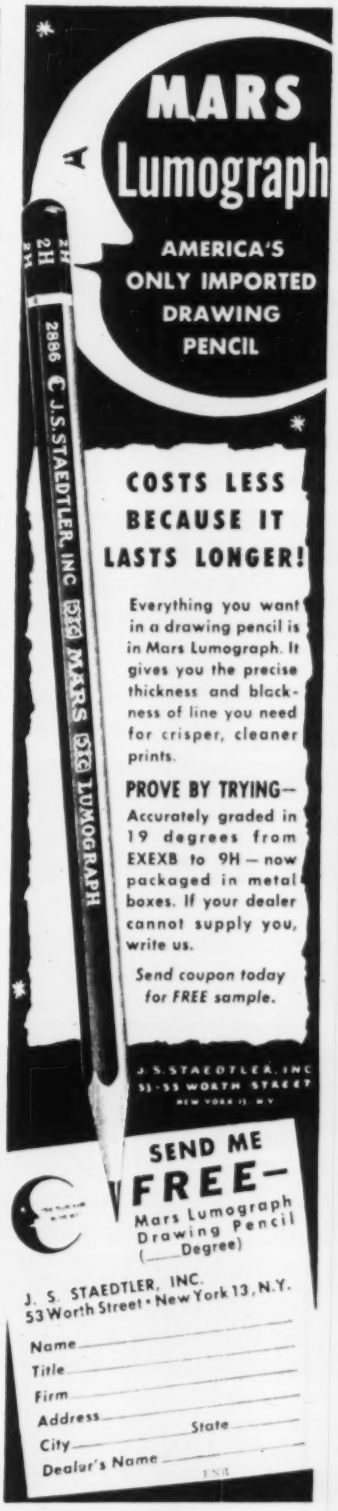
A
MARS
Lumograph
AMERICA'S ONLY IMPORTED DRAWING PENCIL
2H
2886 J.S.STAEDTLER, INC MARS LUMOGRAPH
COSTS LESS BECAUSE IT LASTS LONGER!
Everything you want in a drawing pencil is in Mars Lumograph. It gives you the precise thickness and blackness of line you need for crisper, cleaner prints.
PROVE BY TRYING—
Accurately graded in 19 degrees from EXEXB to 9H — now packaged in metal boxes. If your dealer cannot supply you, write us.
Send coupon today for FREE sample.
J. S. STAEDTLER, INC
53-55 WORTH STREET
NEW YORK 13, N.Y.
SEND ME FREE—
Mars Lumograph Drawing Pencil
(____ Degree)
J. S. STAEDTLER, INC.
53 Worth Street • New York 13, N.Y.
Name
Title
Firm
Address
City State
Dealer's Name
ENR

IF your goal is..

You need..

GREATER OUTPUT AT LOWER COST

HENDRIX *Dragline* BUCKETS

TAKE A LOOK AT THESE *Features*

★ Full Payload Every Time . . . FOR MORE PROFIT.

★ Rugged All-welded Construction . . . LOWER MAINTENANCE COST.

★ 14% Manganese Steel Chains and Fittings . . . STANDARD ON ALL TYPES AND SIZES.

★ A Type for Every Job . . . light, medium, or heavy-duty. WITH OR WITHOUT PERFORATIONS 3/8 to 40 Cubic Yards.

GREATER DEPENDABILITY — GREATER ECONOMY — GREATER OUTPUT

3 TYPES DESIGNED FOR EVERY DIGGING CONDITION

LS . . . A lighter weight bucket designed for levee and drainage work.

TS . . . A medium weight bucket, classified as a general purpose bucket.

HS . . . A heavy duty bucket for moving shale or any hard formation.

Dirt moving men faced with the problems of keeping down maintenance costs will find the solution in HENDRIX DRAGLINE BUCKETS capable of peak production day after day with fewer breakdown delays. Hendrix Buckets are engineered for hard usage . . . to dig in quickly, come up with a full load, and dump cleanly . . . to take bumps, stress and strain in their stride. They're designed for long-time, low-cost operation. You, too, can do what others are doing . . . SWITCH TO A HENDRIX AND WATCH YOUR PROFITS SOAR!

HENDRIX *Lightweight* **DRAGLINE BUCKETS**

For descriptive literature ask your dealer or write

HENDRIX MANUFACTURING CO., INC.

MANSFIELD — LOUISIANA

establish his own office as a consulting engineer in West Palm Beach, Fla. Colonel Gee was in the flood control program since October, 1947. He is a graduate of the University of Iowa, 1930; the U. S. Military Academy, 1935; and received his master's degree in civil engineering at the University of California in 1938.

Winston Bros. Co. has changed its address to 1552 South California Ave., Monrovia, Calif.

G. B. Watson, for 26 years Arcadia, Calif., city engineer, retired March 21.

Robert W. Sweet, who for the last 27 years has been assigated with the engineering department of the New York State Department of Public Works, has been promoted to associate civil engineer in the Rochester office. He has been made engineer of location and design.

S. C. Austin of Raleigh, N. C., equipment engineer for the North Carolina State Highway Commission, with which he has been connected for 29 years, has resigned to become assistant executive secretary of the Carolinas Branch of Associated General Contractors, at Raleigh. He will help member contractors prepare their plans and specifications, size up highway projects and provide other technical information. **Robert Patten** of Charlotte, N. C., will continue as executive secretary, with headquarters at Charlotte. Austin obtained his civil engineering degree from the University of North Carolina in 1921 and immediately joined the N. C. Highway Commission as a resident engineer. Later, he was promoted to district engineer and to 10th Division engineer to equipment engineer in July, 1941.

John F. Flaherty, civil engineer in the Boston, Mass., Public Works Department, has been promoted to engineering assistant to Commissioner George G. Hyland. He will prepare reports and conduct engineering investigations.

Henry C. Tammen has become inactive in Howard, Needles, Tammen & Bergendoff, consulting engineers of Kansas City, Mo., and New York City. Admitted as partners are **Theodore E. Cambern, James P. Exum, Josef Sorkin, Ellis E. Paul,** and **Elmer K. Timby.**

L. H. Reed, a consulting engineer from Pittsfield, Mass., has been named Zanesville, Ohio, city engineer, succeeding the late Carl Spencer.

READY!

Takes less than 30 seconds to prepare RAMSET TOOL with power charge and choice of 65 coated steel fasteners.

RAM!

Place light, compact tool against work, locating fastening point as accurately as desired. Then tap lightly and the fastener is . . .



SET!

Instantly, tightly, cleanly, easily. No drilling, chipping or plugging. Less than a minute from start to finish.



FAST . . . RELIABLE *RAMSET SYSTEM SLASHES COSTS* . . . AND TIME . . . FOR FASTENING INTO STEEL AND CONCRETE

Every day, thousands of users are making startling economies in money and time with RAMSET FASTENING SYSTEM. For practically any kind of fastening jobs into steel, concrete, masonry, RAMSET does the work faster, better, cheaper.

Let us show you, by comparison with ordinary methods, how you can cut costs up to 60% and do your fastening work in ¼ the time with the modern, reliable, proved RAMSET SYSTEM. Send for details and address of nearest RAMSET Specialist.



STEMCO CORPORATION

12117 Berea Road • Cleveland 11, Ohio

PIONEER IN POWDER-ACTUATED FASTENING

Tuffy

TRADE MARK ®

SLINGS

Entirely Unlike Any Other

Scores of wires, stranded into 9 parts, then machine woven into an interlaced wire fabric—that is the unique patented construction which gives Tuffy extraordinary flexibility and stamina.

Super TOUGH—On every kind of load, under all kinds of pulls and with every type of hitch, Tuffy Slings have proved their superiority and universal adaptability.

Super-FLEXIBLE—Tie Tuffy Slings into knots, kink them, flatten the eyes. Observe how many more times you can straighten Tuffy Slings out without material damage. Note too, that cutting any one of the 9 parts will not result in strand-ing the sling.

Tested Strength Twice Safe Working Load Limit

Each Tuffy sling is proof-tested to twice the safe working load indicated on its metal tag. Tuffy's interlaced construction makes possible eye splices averaging 95% of fabric strength.

9 Types—Factory Fitted Or Unspliced on The Reel

Try any one of the 9 factory packaged types — for choker, basket or bridle hitches. Prove to your own satisfaction their money saving worth to you. Or, if you're rigged for splicing—Tuffy interlaced wire sling fabric is available on the reel.

union *Wire Rope* **CORPORATION**

2228 Manchester Ave.,
Kansas City, Mo.
Send Tuffy Sling details.

FIRM NAME_____

ADDRESS_____

CITY_____ STATE_____

EDUCATION and RESEARCH

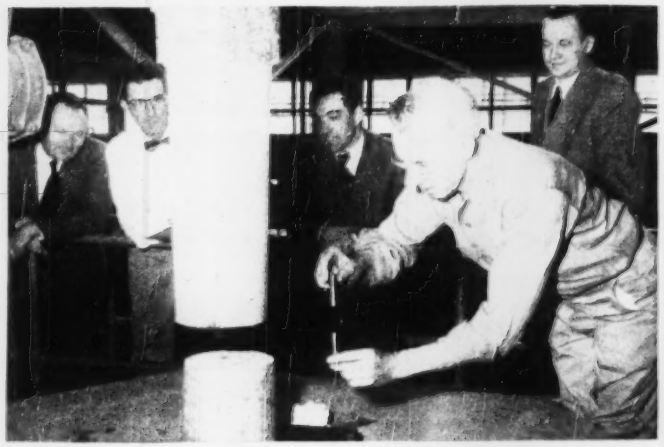

POWERFUL TESTER—This testing machine capable of exerting 5,000,000 lb. in tension was itself tested recently prior to acceptance at the Denver laboratories of the Bureau of Reclamation. It will pay for its high cost by disclosing weakness or excessive strength of bureau-designed shapes or materials considered for projects. Shown is an eight-inch steel bar which failed at 4,175,000 lb. load. Leaning against the lower crosshead of the machine, James McCord of the Baldwin Locomotive Works, the manufacturer, compares the 8.2 in. bar with a standard .505 in. bar broken by a small testing machine. Looking on, from left to right, are M. L. Hill and F. S. Buckingham of Baldwin, and Frank Tessitor and Walter Price of Reclamation.

Additional agreements for housing research

More agreements upon projects in the research program authorized under the Housing Act of 1949 have been announced. These investigations, to be made by Pennsylvania State College and the U. S. Department of Agriculture, will supply needed data on deterioration from water-vapor in frame walls and from destructive mold and fungi caused by soil moisture in the crawl space of basementless houses.

The construction of more tightly-built houses through the use of new materials and of the basementless house in meeting the demand for housing at lower costs has increased the need for more knowledge on moisture conditions in dwellings. Establishment of reliable information on moisture conditions will enable development of means for prevention of damage and deterioration from excessive condensation in roofs, walls and floors.

Another project covers investigations into actual temperature and relative humidity ranges found in current types of small dwellings, with special emphasis on the living habits of the occupants. Data will be gathered in not less than 15 dwellings.

In the two projects to be handled by Pennsylvania State College, data will be gathered on water-vapor accumulation within wood frame walls exposed to actual weather conditions and to temperature and humidity conditions considered realistic for the living habits of people. The first project will provide data on water-vapor characteristics under controlled interior conditions of temperature and humidity and actual weather on the exterior.

Projects covering investigations in plumbing and sewage disposal systems, heating and ventilation, and chimneys and flues have been announced previously. The latter projects will be handled by the National Bureau of Standards, the U. S. Public Health Service and the University of Illinois.

Investigations are set up under the supervision of Richard U. Ratcliff, director, Division of Housing Research, and are to be carried out through the existing facilities of other agencies under the sponsorship of HHFA.

Glennan tells of defects in engineering education

Defects in engineering education were pointed out to members of the Niagara County Chapter of the New York State Society of Professional Engineers recently by T. Keith Glennan, president of Case Institute of Tech-

(Continued on page 65)

Barber-Greene Photo-News

ON-THE-JOB VIEWS AND COST-SAVING IDEAS • VOLUME 1 • NO. 1

Extensive use of cost-reducing belt conveyors is evident in this view of Uvalde Rock Asphalt Company's plant.

MINES 6 MILES OF ROAD PER DAY

Every day from 3,000 to 4,000 tons of processed rock asphalt are produced by the Uvalde Rock Asphalt Company out in Blewett, Texas — enough to put a 1-inch top course on 6 to 7 miles of road. This impressive production achievement is made possible largely through the use of belt conveyors that handle all the material through processing operations to the various stock piles. B-G Belt Conveyors are ideally suited to this type of operation, where relocation is frequently necessary. They are easily disassembled, relocated and reassembled as conditions dictate.

HISTORICAL SITE FOR TURNPIKE PLANT. A modern B-G belt conveyor system identifies Pennsylvania Aggregate's Cornwall plant which is located on famed Cornwall Banks — site of one of the world's greatest mines — oldest continuously operated in the new world. The two-century accumulation of limestone — eight million cubic yards — is being processed for use by various Turnpike contractors.

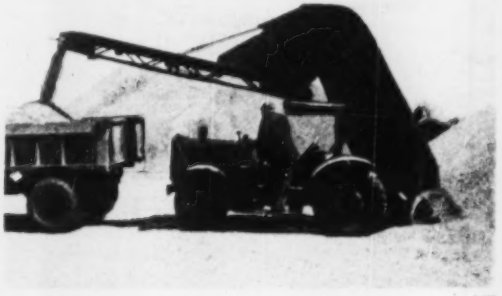

NEW LOADER HAS LONG REACH. Largest, highest trucks, trailers — even railroad cars — are loaded to full capacity at a 3 yd. min. clip by the B-G 543 Loader. Hydraulically controlled conveyor swivels to trim load, eliminates spillage or partly filled trucks. The 543 travels at 15 m.p.h. on its tractor-type chassis is easily convertible to a 7-11 yd. min. snow loader to give year 'round service.

Barber-Greene Photo-News

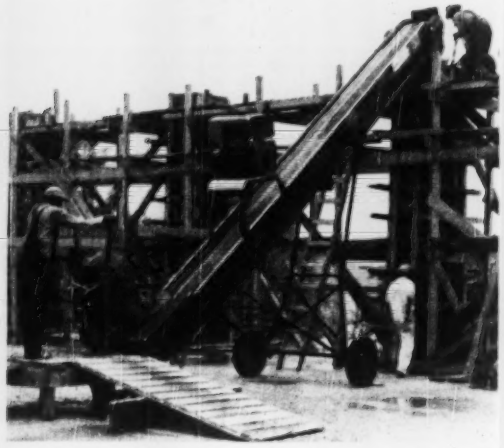

WET CONCRETE GETS A LIFT. Another example of the broad variety of work that can be done by B-G portable conveyors came up on a recent H. A. Dailey Company job near St. Louis. A number of 16-foot columns were poured by Dailey's B-G portable — eliminating costly ramps and scaffolding, allowing simple buggy loading. The job was done quickly at lowest cost by this portable Barber-Greene which, incidentally, was towed all the way from Aurora, Illinois, to the job, over 250 miles. Portability like this pays off on job after job.

"AT HOME" IN MIAMI SUBDIVISION. Digging footings by hand in tough coral rock is an expensive operation that's avoided by such Florida contractors as the Clinton Construction Company in Miami. On a large subdivision project recently, all footings were dug by their B-G ditcher on an "efficient and economical" basis. Coral rock, caliche, frozen ground — even bituminous pavement — pose no problem for B-G Vertical Boom ditchers. Their "milling action" enables them to cut through toughest material, leaving a clean-bottomed, smooth wall trench.

INSIDE JOB

By a Smooth Operator

When the state of New Hampshire decided to improve the footing and reduce adulteration by surfacing the floor in its Concord coaling base shed, a B-G finisher owned by The Manchester Sand and Gravel Company took over the job. In the shed area, which was restricted by several rows of I-beam roof supports, it maneuvered smoothly to place 500 tons of material with a minimum of hand work required for finishing. The base and binder course were laid the length of the building, and the final sheet asphalt course was laid at right angles to them. Result: a smooth, weatherproof surface at lowest cost.

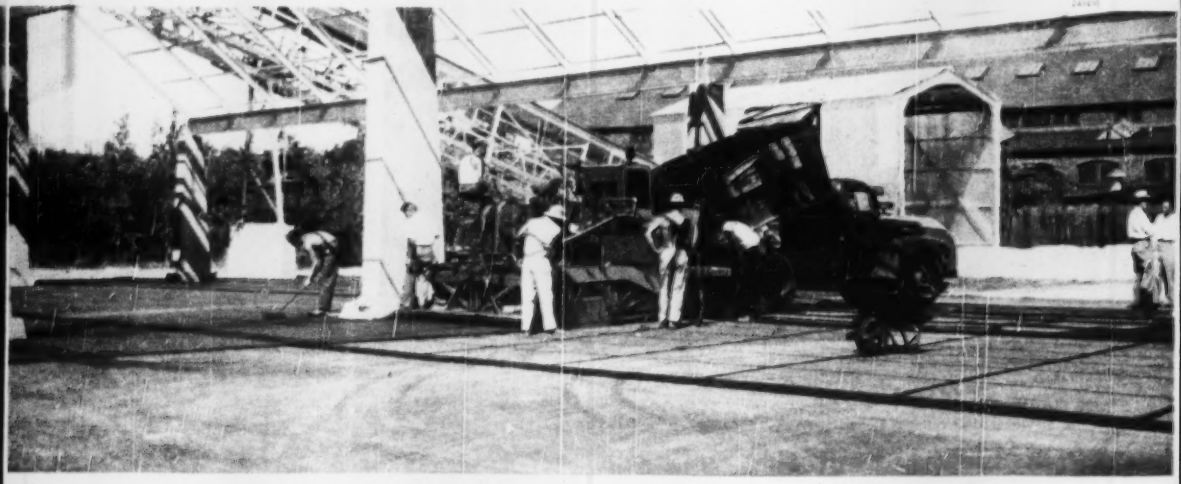

for full, fast information on any equipment

A NINE-YEAR-OLD MAKES GOOD IN NEW CAREER

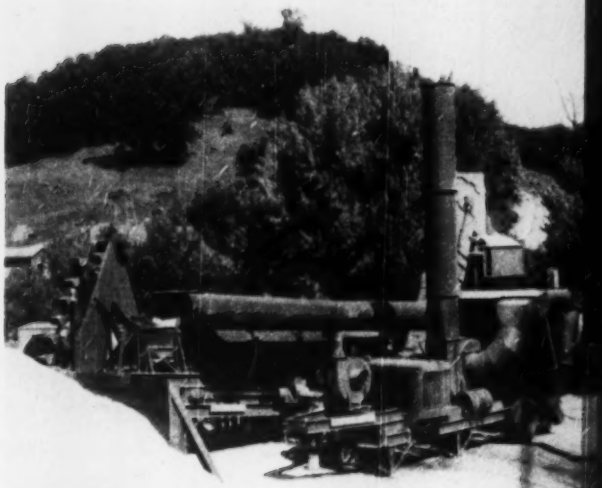

Back in 1941 a B-G Travel Plant mixer started its working life with Rein and Schultze, Wisconsin road builders. Today, nine years and many hundreds of miles later, this original Travel Plant forms the nucleus around which the owners have built a highly efficient single aggregate plant. With a B-G Dust Collector and low pressure burner Dryer, this setup produced 120 tons of mix per hour in recent work on Wisconsin Highway 71. Future plans involve the possibility of adding a gradation unit for producing multiple aggregate hot mix. Barber-Greene long-term sturdiness combines with Barber-Greene flexibility to greatly extend and prolong the usefulness of B-G asphalt mixing equipment.

REMIND YOU OF LAST WINTER? Communities where snow took its toll last winter — in lost parking meter revenue, traffic and business interruptions and the like — should plan now to be ready next year to minimize these losses and to cut the cost of clearing snow quickly. The new Barber-Greene Model 544 is within the budget of small communities. It travels at 15 miles per hour — and loads up to 11 cubic yards a minute, keeps trucks on the move with a minimum of manpower. An added asset, it can be converted to an all-material, 3 yard-per-minute truck loader for summer use at little cost other than for exchanging the bucket lines. Other B-G Snow Loaders with capacities to 20 cu. yd. min.

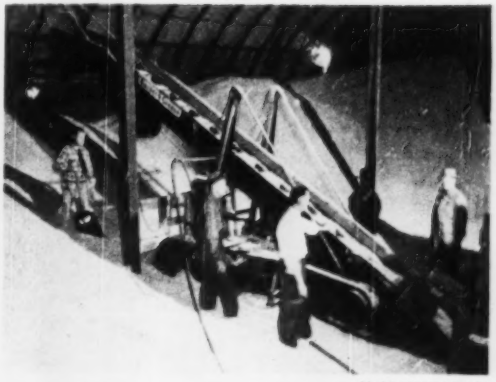

NEW TWIST FOR A "GOOSENECK." The versatility of a B-G Gooseneck Loader eliminated the need for extra investment in machinery for the Farmers Elevator Co. of Mason City, Ia. For with the problem of cutting costs in loading, unloading and reclaiming coal, they needed mechanical help in storing over 55,000 bushels of corn. Their B-G "Gooseneck," along with its coal business duties, handled this job — loading storage bins at a rate of 300 bushels in 20 minutes. The exclusive "Gooseneck" design of this Barber-Greene — which minimizes degradation when handling coal — was an asset in handling seed corn as it helped prevent damage to the kernels.

on these pages -- see your B-G Distributor

Barber-Greene *Photo-News*

IT'S A BRIDGE— FOR AGGREGATE ONLY

When your sand deposit is on one side of a navigable stream and your plant and railroad facilities are on the other, you have a problem similar to that one faced by Becker County Sand and Gravel Company in Fayetteville, North Carolina. Their solution: a unique bridge with 55-foot clearance carrying a 408-foot B-G belt conveyor, and another B-G conveyor that takes the sand and gravel to the washing and screening plant. Currently, this company is moving around 25 cars per day from this plant—another "special" problem solved through the use of standard, pre-engineered, easy-to-install Barber-Greene belt conveyors.

TRIPLE PLAY BY WELL-KNOWN TEAM. From siding to silos via B-G hopper-car unloader and B-G transfer and shuttle belt conveyors is a fast, low-cost trip for materials used by Imperial Redi-Mix Company in their plant at Melrose Park, Illinois. Mechanized "push button" handling with this unloading-storing team reduces the manpower requirements to a minimum.

SERVICES THAT PAY — MORE THAN THEY COST

There is much for you to gain in calling upon your Barber-Greene distributor for help in solving problems involving the handling of all materials . . . mixing and placing bituminous surfacing materials . . . as well as ditching and snow removal. Your B-G distributor and his sales and service representatives have been through intensive training courses at the Barber-Greene factory. They know how to apply Barber-Greene equipment to assure the most in performance on your job—they know how to show you the best in maintenance practice. Further, your B-G distributor has service and repair part facilities you can depend upon through the years. *For complete information—bulletins, specifications and prices on any or all Barber-Greene equipment—get in touch with your B-G distributor or call, write or wire directly to the address below.*

Barber-Greene Company
AURORA, ILLINOIS, U. S. A.

nology, Cleveland, Ohio.

"In the past," he said, "certain deficiencies have shown up in engineering education since many young engineers lacked understanding of human problems, and the ability to speak and write well. They also seemed wanting in convictions about, and knowledge of, our democratic processes, and an understanding of business problems."

However, he said that these conditions are being corrected in modern engineering schools.

"Industry expects," he said, "that its engineers will have ability for leadership, orderly thinking, knowledge of technical subjects, and the ability to apply it in a humanitarian manner."

Faculty News

Horace S. Ford, treasurer, and Edward L. Moreland, executive vice president of the Massachusetts Institute of Technology, will retire next July. Mr. Ford has been principal financial officer of the institute for the last 36 years. Dr. Moreland was dean of engineering from 1938 to 1946.

The appointment of Prof. John T. Rule, head of the section of graphics at the Massachusetts Institute of Technology since 1938, to be chairman of the general science and general engineering courses, was announced recently by President James B. Killian, Jr. Professor Rule will succeed Prof. Ralph G. Hudson, who has been in charge of the courses since 1952, and will become emeritus in June.

Harold E. Babbitt, professor of sanitary engineering, University of Illinois, has been granted leave of absence for this semester to study recent trends in sanitary engineering, largely through visits to research laboratories and with state sanitary engineers.

Russell C. Binnker, associate professor of civil engineering at the University of Southern California, has been appointed professor of civil engineering at Virginia Polytechnic Institute, effective Sept. 1, at the same time their Prof. P. H. McGrither assumes the headship of the civil engineering department, succeeding R. B. H. Begg, retiring after 37 years. Binnker earned his master's degree in civil engineering at the University of Minnesota in 1933, and has done additional graduate study at Worcester Polytechnic Institute and Columbia University.

Lorenz G. Straub, director of the St. Anthony Falls Hydraulic Laboratory of the University of Minnesota, and head of the department of civil engineering, is civilian member of the Beach Erosion Board of the Corps of Engineers.

ELECTIONS AND ACTIVITIES

The Boston, Mass., Society of Civil Engineers has elected the following officers: President, Thomas R. Camp, Camp, Dresser & McKee; vice president, Emil A. Gramstorff, professor and head of the department of civil engineering, Northeastern University; secretary, Robert W. Moir, associate civil engineer, Metropolitan District Commission; treasurer, Herman G. Dresser, Camp, Dresser & McKee; directors, William E. Hyland, Fay, Spofford & Thorndike; Allen J. Burdoin, senior engineer, Metcalf & Eddy, engineers.

At a recent meeting of the Arkansas Society of Professional Engineers registration certificates were presented to Delbert A. Schmand, Wm. B. Stiles, Wm. A. Lewis, Jr., R. D. Enes, Henry E. Stratton, W. C. Van Meter, M. E. Barker, Frank D. Conley, Henry C. Wilms, F. M. Methvin, C. O. Cogburn, Thos. B. Fleeming, Jr., and Maurice E. McCoy, from various sections of the state.

MAJOR MEETINGS

Producers' Council, ... meeting, Washington, D. C., May 9-12.

Highway Conference, University of Florida, Gainesville, May 11-12.

U. S. Conference of Mayors, Waldorf-Astoria Hotel, New York, N. Y., May 11-13.

Florida Highway Conference, University of Florida, Gainesville, Fla., May 11-12.

American Water Works Association, Pacific Southwest Section, Hotel Westward Ho, Phoenix, Ariz., May 11-13.

National Citizens Conference on Planning, Statler Hotel, Washington, D. C., May 12-14.

American Water Work Association, Missouri Basin Section, Convention Hall, Independence, Mo., May 14-16.

Society for Experimental Stress Analysis, ... Hotel Statler, Cleveland, Ohio, May 15-17.

Building Officials Conference of America, ... Los Angeles, Calif., June 4-9.

Central States Sewage Works Association, ... Hotel, Lincoln, Indianapolis, Ind., June 5-6.

Western Association of State Highway Officials, Mayflower Hotel, Reno, Nev., June 12-15.

Pennsylvania Sewage Works School, ... State College, Pa., June 12-15.

Pennsylvania Water Works School, ... State College, Pa., June 26-28.

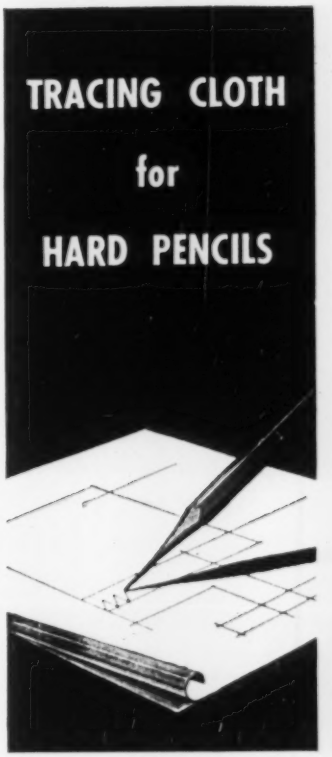

● Imperial Pencil Tracing Cloth has the same superbly uniform cloth foundation and transparency as the world famous Imperial Tracing Cloth. But it is distinguished by its special dull drawing surface, on which hard pencils can be used, giving clean, sharp, opaque, non-smudging lines.

Erasures are made easily, without damage. It gives sharp, contrasting prints of the finest lines. It resists the effects of time and wear, and does not become brittle or opaque.

Imperial Pencil Tracing Cloth is right for ink drawings as well.

IMPERIAL PENCIL TRACING CLOTH

SOLD BY LEADING STATIONERY AND DRAWING MATERIAL DEALERS EVERYWHERE

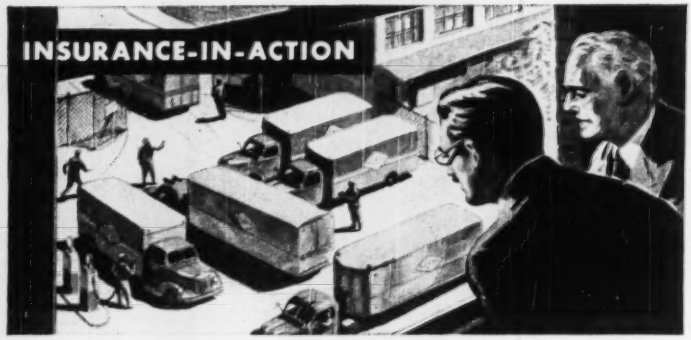

Our truck dispatcher was getting over $20,000 a year—but we didn't know it!

(Based on Hartford Claim #127763)

We operate a cartage service, making pickups and deliveries for companies that don't have their own trucks. Often our drivers collect C.O.D.'s, and they turn in the money to our dispatcher who sets up the accounts on it for our cashier. We had a very capable man in this dispatching job whom we were paying about $4500 yearly. But that wasn't enough for him and his taste for gambling and high life. He began to hold back some of the C.O.D. collections and juggle the accounts. In less than a year, before the shortages became so great he couldn't conceal them any longer, he got away with $16,000! Fortunately we had a $10,000 Fidelity Bond with the Hartford which we collected in full to partially make up our loss. This experience proved to us that *all* employees should be bonded *and for an adequate amount!*

• • •

What about *your* exposure to dishonesty losses—is your business completely and adequately safeguarded against this risk? Hartford Blanket Fidelity Bonds offer the protection you need in the most modern, efficient and economical form. Your local Hartford agent or your own insurance broker can provide full details about this "Dishonesty Insurance" without obligation. Call Western Union "Operator 25" for the name and address of the Hartford representative in your community, or write to the company for a free explanatory booklet.

HARTFORD

ACCIDENT AND INDEMNITY COMPANY

Hartford 15, Connecticut

Hartford Fire Insurance Company

Hartford Live Stock Insurance Company

YEAR IN AND YEAR OUT YOU'LL DO WELL WITH THE HARTFORD

OBITUARY

Walter Scott Walls, 77, engineer in the Western New York area for many years, died April 18. He began his career with the Buffalo engineering firm of Ricker and Wing. Later he worked at the Union Bridge Works in Athens, Pa. for the George L. Morrison Co. in Chicago, and the Pittsburgh Testing Laboratory. He was superintendent of construction when the Lackawana Steel Co. went to Buffalo. He later had charge of construction projects for the Ontario Power Co. at Niagara Falls, Ont., and designed and directed construction of the high level bridge at St. Catharines, Ont.

Joseph D. Roberts, a structural engineer and chief engineer of the Central Illinois Public Service Co., died at Springfield, Ill., April 15.

Edwin O. Myers, 73, founder of the E. O. Myers Construction Co., Mansfield, Ohio, died April 18. He was chief adviser to the Bureau of Roads of Michigan for ten years before he went to Ohio in 1930.

Howard O. Core, 78, former Delaware County engineer at Delaware, Ohio, and on the county engineer's staff for more than 20 years, died April 13.

Fred A. Mitchell, 54, chief engineer for the Milwaukee Bridge Co., Milwaukee, Wis., died April 5.

George Bryson, 68, former town engineer of Brockville, Ont., and from 1932 to 1947 street supervisor of Ottawa, died April 17. He was one of the founders of the Professional Engineers Association of Ontario.

Garage ordinance—A war-suspended Los Angeles building law requiring construction of a garage for every new single or double family residence may not be reinstated for another five years, under a proposal advanced by a city councilman, who claims that enforcement of the garage ordinance now would work a financial hardship on 25,500 families whose homes are without garages and who would have to spend an average of $500 to build them. New construction would not be affected by the moratorium. Building permits issued now require the construction of a garage, but final inspection approval now be obtained with only a garage foundation and floor, provided the garage is completed within a year.

LOST: 19 FEET OF WATER IN THE HEART OF TEXAS

Belton Dam at Mill
Lookin

Photo courtesy Corps of Engrs., Galveston, Texas District

You're looking at BELTON DAM TEST PIT #2 — Belton, Texas — where a MORETRENCH WELLPOINT SYSTEM operated so effectively that water was lowered to within 1 foot of the rock found at subgrade. Sandbagging took care of the rest. Test hole explorations went ahead "in the dry."

This was a difficult job because of adverse soil conditions. The contractor, Russ Mitchell, Inc., Houston, Texas, knew from past experience that he could count on MORETRENCH to handle the pumping perfectly.

Confidence like this is earned . . . a good thing to remember when you're in the market for wellpoints!

CATALOG ON REQUEST

MORETRENCH CORPORATION

90 West St.
New York 6

4900 S. Austin Ave.
Chicago 38, Illinois

7701 Interbay Blvd.
Tampa 9, Florida

315 W. 25th St.
Houston 8, Texas

Rockaway
New Jersey

PAYING FOR THINGS IS SO

(a sympathetic ad)

1

Because businessmen like protection...

2

But hate paying for it...



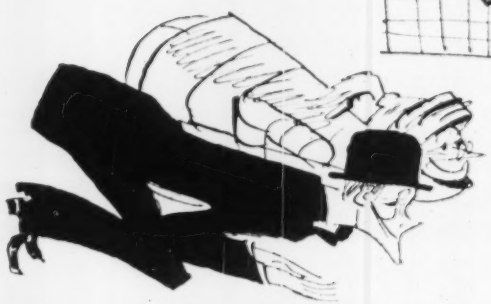

5

50% below the average rate in some cases!

AMERICAN MUTUAL ...the first American liability insurance company

© 1959 AMERICAN MUTUAL LIABILITY INSURANCE COMPANY

ANNOYING! BY MR. FRIENDLY

(3) We've helped 'em eliminate accident hazards . . .

(4) Which cut their insurance costs as much as . . .

Look at these savings and look us up!

Here are a few of many cases where we've helped companies to reduce premiums to below average for their field!

A KANSAS IRON WORKS *From 24.5% above average to 14.0% below, in 4 years.*

A MASSACHUSETTS MFR. *From 26.2% above to 6.9% below in 1 year.*

AN ALABAMA CONTRACTOR *From 24.3% above to 6.8% below in 1 year.*

We saved a large Iron works almost half a million dollars through dividends alone in 20 years. And another company over $400,000.00 in 27 years. If you're interested in savings, that's our middle name!

MAIL THIS COUPON NOW—WITHOUT DELAY!

Dept. O-61, American Mutual Liability Insurance Company
142 Berkeley Street, Boston 16, Massachusetts

Without obligation, please rush to me information on *The All-American Plan* so that I may be richer and happier!

Name _____

Street _____

City _____ State _____

A M

MATERIALS AND LABOR PRICES

Market quotations on construction materials and wage rates reported monthly by ENR correspondents
June Materials and Labor Prices will appear in the June 8, 1950 issue

CEMENT, AGGREGATE, READY-MIXED CONCRETE—F. O. B. CITY

	PORTLAND CEMENT* Per bbl. C.L. lots incl. $1.00 per bbl. for bags, cash dis. not deducted			SAND AND GRAVEL Per ton, carload lots			CRUSHED STONE Per ton, carload lots		CRUSHED SLAG Per ton, carload lots, f.o.b. plant		CONCRETE BLOCK 8 x 8 x 16-in. del., per block	CONCRETE Ready-Mixed 1:2:4, over 50 c.y., del.
	Cloth	Paper	Bulk	Gravel ¾-in.	Gravel 3-in.	Sand	¾-in.	3-in.	¾-in.	3-in.	Sand, grav.	$ per c.y., wet agg.
Atlanta	$4.16	$3.41	$3.10	$2.00	$2.00	$1.70	$2.10	$2.10	$1.65	$1.85	$0.1725	$0.1725	$11.00
Baltimore		3.39	3.14	2.40‡a	2.40‡a	1.65‡a	2.60‡a	2.70‡a	2.45‡a	2.45‡a	16	16¢	10.25
Birmingham	3.75	3.60	2.68	2.06	2.06	1.83	2.50	2.50	1.60	1.20	145	145	7.75
Boston		3.67	3.41	2.50‡	2.50‡	2.50‡	1.60‡	1.70‡			166	205‡a	10.45‡
Chicago	3.83‡3.99	2.92‡2.99	2.68‡2.74	2.75‡‖	2.75‡‖	2.30‡‖	2.75‡‖	2.75‡‖	2.00‡	2.00‡	20	205	9.70
Cincinnati	4.14	3.34	3.08	1.75‡e	1.75‡e	1.85‡e	2.00‡k	2.00‡k	1.50	1.50	185	205	11.65‡
Cleveland	3.83	3.03	2.75	1.96‡f	1.65‡	1.55	3.55‡a	3.55‡a	2.23‡	2.75‡		21	11.80‡
Dallas	3.54	2.74	2.49	2.00	2.15	1.75	2.10	2.15			088‡	125	9.39
Denver		3.54	3.29	1.85	2.00	1.35					20	23‡	9.65
Detroit		2.98	2.74	3.25‡h	3.25‡h	3.00‡h	2.75‡3.00‡	2.75‡3.00‡	3.00‡	3.00‡	17	18‡	9.85
Kansas City	3.93	3.13	2.88	1.90	1.90	1.50‡	1.90‡	1.90‡			174‡	215‡	10.40‡
Los Angeles		3.72‡	3.32‡	1.94‡a	2.04‡a	1.74‡a	1.92‡a	1.92‡a			12‡	23‡	9.70‡‡
Minneapolis	4.13‡‡	3.53‡	3.07‡‡	2.30‡a	2.30‡a	1.35‡a	2.40‡a	2.40‡a			21‡		10.30‡
Montreal		2.46‡	2.31‡		2.50‡	2.00	1.80	1.10‡			22	23‡	9.05‡
New Orleans		2.96‡	2.65‡	2.32	2.32	1.82			1.05	1.25	25		12.40
New York	4.29	3.49	3.24	2.30‡	2.30‡	1.45‡	2.35‡	2.35‡					10.50‡
Philadelphia	3.93‡4.23‡	3.13‡3.43‡	2.87‡3.17‡	2.45‡	2.55‡	2.05‡	1.90‡	1.95‡	1.50	1.50	18‡22		10.80‡
Pittsburgh	3.90	3.18	2.85	2.05‡	2.05‡	2.00‡	2.50‡	2.50‡	2.05	2.05	21‡	21‡	10.85‡
St. Louis		2.69‡3.05‡	2.77‡	2.40‡2.60‡m	2.40‡2.60‡m	2.00‡2.10‡m	1.60‡	1.60‡	1.15	1.15	21‡	24‡	9.40‡
San Francisco		3.39	2.99	1.86	1.86	1.36	1.86					25‡	10.15‡
Seattle		3.55‡	3.05‡	2.75‡m	2.75‡m	2.75‡m	3.50‡m	3.50‡m			22‡	31‡35‡	10.25‡

‡ Delivered. * Prices incl. dealers' comm. except as noted. CEMENT: a Subj. to 10¢ dis. b Less 2% for cash. c C.I.F. price dealers' comm. not incl. d Dealers will add f.o.b. e Prices subject to change. ** May be discontinued after Jan. 1. SAND, GRAVEL, STONE & SLAG: a Truck lots. b Per ton. c 5-ton or more. d 3-ton or more. e Less 5% for cash. f Less than 5 tons. g Sales tax incl. h 1-in. quarry. i Barge lots. j Incl. 50¢ assd. k Incl. some Hudson River. m Less 2% for cash.

CONCRETE BLOCK: a Cinder. b Waylite. c Haydite. d Celocrete. e 5 1/3 x 8 x 12-in. f 8 x 8 x 16. g Incl. truck at job. h Less 2% for cash. i Less 3% for cash.

READY-MIXED CONCRETE: a 5-mi. rds. or over del. Man. b 25-mi. rds. or more. c 10-100 cu. brackets. d Truck loads up to 500 cu. yds. e 2000 lb. conc. f 2500 lb. conc. g Ave. haul 7 ¾ mi. delvr. h Less 50¢ for cash. i 5% off for cash. j 2% off for cash. k Sales tax included.

CASH DISCOUNTS: CEMENT to contractors: Truck delivery 2% for cash on 10th of month, on carload deliveries, no trucking, same as dealer cash discount 10¢ per bbl. for payment within 15 days of date of invoice. Subject discount 10¢ per bbl. 20 days in Montreal.

CURRENT MAXIMUM PRICES AT CEMENT MILLS

Charge for bags not included. A for cloth bags, add $1.00 per bbl. 25¢ refund allowed for each returnable bag. for paper bags, add 25¢ per bbl., not refundable.

	Bulk		Bulk		Bulk		Bulk
Richard City, Tenn.	$2.40†	Buffington, Ind.	$2.30	Stockton, Minn.	$2.40	Manistique, Mich.	$2.30†	Toledo, O.	$2.40†
Clinchfield, Ga.	2.40†	Independence, Kan.	2.30	Leeds, Ala.	2.25	Saginaw, Mich.	2.35†	Milwaukee, Wis.	2.50†
Kingsport, Tenn.	2.40†	Hannibal, Mo.	2.35	Duluth, Minn.	2.40	Wyandotte, Mich.	2.40†	Green Bay, Wis.	2.50†
West Des Moines, Iowa	2.45†	Northampton, Pa.	2.40	Hudson, N.Y.	2.40	Buffalo, N.Y.	2.40†	Ironton, O.	2.30†
Nazareth, Pa.	2.40†	Universal, Pa.	2.40	Algonia, Mich.	2.25†	Oswego, N.Y.	2.60†	Montreal, Que.	2.14
Bath, Pa.	2.40†	Waco, Tex. (+ 10¢ tax)	2.40	Detroit, Mich.	2.40†	Cleveland, O.	2.40†	W. Winfield, Pa.	2.40†

† Prices to hold for second quarter of 1950.

PAVING BRICK, BLOCK, ASPHALT, ROAD OILS—F. O. B. CITY

	PAVING BRICK AND BLOCK Granite, Per M f.o.b. (20,000 f.o.b.)	Brick, per M, To Mill, carload lots	Wood, per sq. yd. 3-in. 16/lb. treat	PAVING ASPHALT Per ton, less than 50 penetration, Tank car	Drums	ASPHALT BINDERS—FLUXES Per gal., 50-200 penetration, Tank car	Drums	CUTBACK ASPHALT Per ton, Tank car	Drums	ROAD OIL Per gal., Tank car	ASPHALT EMULSION (Quick breaking) Per gal., Tank car	Drums
Atlanta	$74.00	$35.00	$2.25									
Baltimore	140.00‡	37.70‡		$21.00		$ 085	$0.11	$ 085	$ 16	$ 085	$ 085	$0.11
Birmingham		32.50										
Boston				24.50‡	$31.50‡	103‡a	185‡a	115‡a	205‡a	10‡a	113‡a	205‡a
Chicago	165.00‡a	85.00‡	88.00‡	20.25‡	26.25‡	19.25‡a	24.25‡a	085‡a	16‡a	075‡	1025‡	1075‡	13‡	1675‡
Cincinnati				19.00‡		085	085	085‡						
Cleveland		40.00‡	3.35‡	24.00‡	31.50‡	24.00‡	31.50‡	10‡	22‡	10	11	25
Dallas	e	40.00‡	e	23.95	42.95	1012	1868	26.95‡	47.95‡	0687	1062	1423
Denver		43.00‡										
Detroit				26.65		12.188		0850‡		092		197
Kansas City		40.00‡		18.05‡				07‡a	07.5‡a	0855‡		
Los Angeles	e		e	17.50‡m		12.50‡a		11.50‡		12.50‡a	0775‡	1525‡
Minneapolis			2.85‡	25.50	30.00	24.00‡	33.00‡	8.00	35.00	09	12	22
Montreal	137.00	e	e	27.00‡	36.45‡	16.70‡a	18.70‡a	18.50‡a	18.20‡a	13.20‡a	174‡	215‡a
New Orleans				16.50‡		10.50‡		08‡		0725‡	08‡	1425‡
New York			2.35‡	21.50‡	32.50‡	22.50‡	41.85‡a	0950‡	1767‡a	0800‡	0940‡	1787‡
Philadelphia	130.00‡	110.00‡	4.00‡	27.00‡		22.00‡		450‡				
Pittsburgh	165.00‡	42.00‡	4.20‡	22.00‡	35.00‡	10‡	22‡	27.00‡	39.00‡	095‡	09‡	21‡
St. Louis				16.50‡		14.50‡	0845‡a			15‡	108‡	25‡
San Francisco		67.75‡		14.50‡	30.00‡	14.50‡		10.50‡			8‡	14‡
Seattle				15.50‡	36.00‡	16.00‡a		1750‡	2150‡	16.00‡a	088‡	066‡

‡ Delivered. PAVING BRICK & BLOCK: a f.o.b. Clearwood. b f.o.b. refinery, Englewood, Ill. c f.o.b. Lemont, Ill. d f.o.b. Kansas. e Not sold. f Delivered to trade. g 25% K.S. freight. h Delivered to job. i Less than 100 penetr. j 40-50 penetr. k Tax incl. l Delivered in steel tkr. m Use of used drums. n Delivered in steel drums. ASPHALT: a Proposal point, Detroit, Mich. b Refinery, Detroit. c Delivered in steel drums, per drum. d 55-gal. drums. e Prepaid point, Detroit, Mich. f f.o.b. refinery, El Segundo, Calif. g Delivered in steel tkr. h Less 100 gal. i Per gal. j Delivered in steel drums, per drum. k 55-gal. drums. l f.o.b. refinery, Englewood, Ill. m f.o.b. Wood River or Roxana, Ill. n f.o.b. Richmond, Baton Rouge.

(continued on page 70)

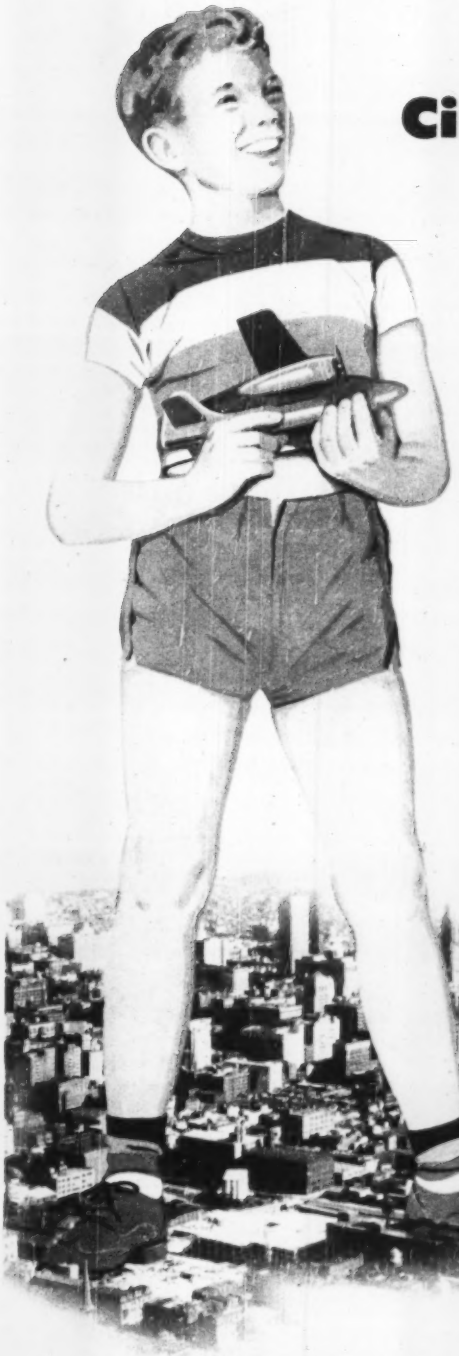

Cities Grow, Too...

Like a growing boy, most cities today are "busting out at the seams"

TAKE a look at your city! Industry needs room to grow. Residential areas are swollen with new population. Yesterday's roads don't fit today's traffic and transport problems.

The old town needs a new suit of clothes—*up-to-date maps* to provide city planners with *up-to-the-minute information*. But the costs of collecting new map facts by conventional methods are high. No city can afford to wait years for maps needed *now*.

Aero Service and its highly skilled engineers can meet your mapping needs, with speed, accuracy, and economy. Our aerial mapping methods deliver reliable topographic maps in a matter of months—*not years*—at less than half the cost of ground surveys. Your city planning can move ahead swiftly—at the lowest possible cost to the taxpayer.

Whatever your map needs—for new industrial plans, traffic control, or overall redevelopment—AERO'S 31 years' photogrammetric experience will provide your city with maps that meet every demand of engineering accuracy. Write Aero Service today.

AERO

SERVICE CORPORATION

236 E. COURTLAND ST., PHILA. 20, PA.

Oldest Flying Corporation in the World

AERO MAPS THE FUTURE

TOPOGRAPHIC MAPS • PLANIMETRIC MAPS • PRECISE AERIAL MOSAICS • AIRBORNE MAGNETOMETER SURVEYS • RELIEF MODELS • COLOR PHOTOGRAPHY

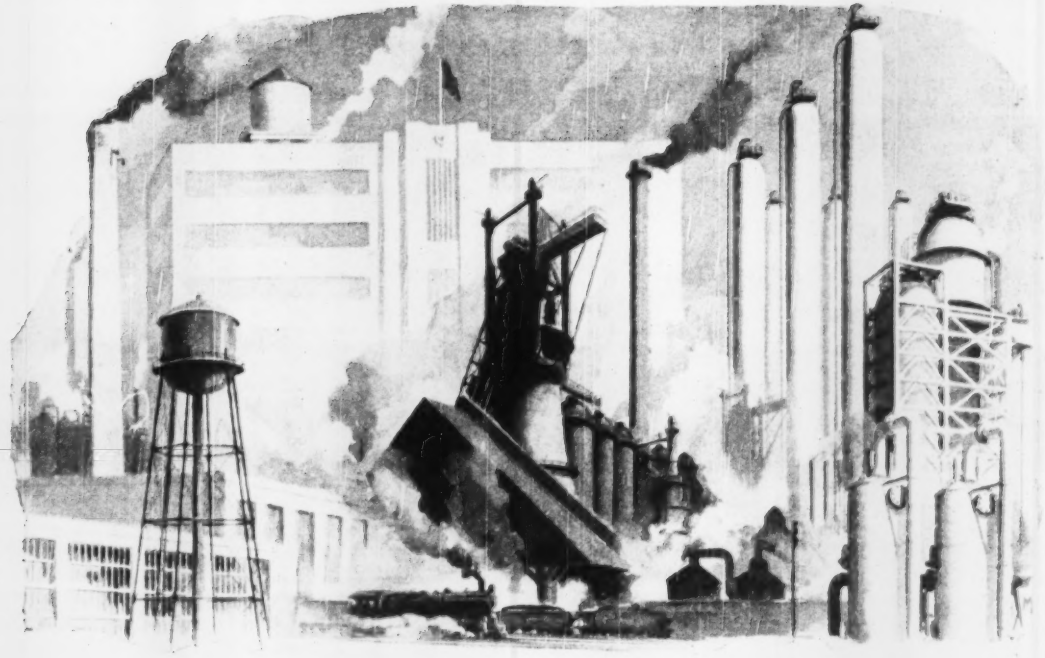

INDUSTRY *and the*
ROTOVALVE

MARCHING toward new goals—in a mechanized manufacturing world—industrialists, engineers, plant managers and management of all kinds are exploring every means of cutting costs and increasing efficiency. This explains the great demand and use of Rotovalves. Their design permits the conical plug to lift, rotate and seat itself, and assures free flow through a full circular opening in both valve body and plug, thereby cutting losses.

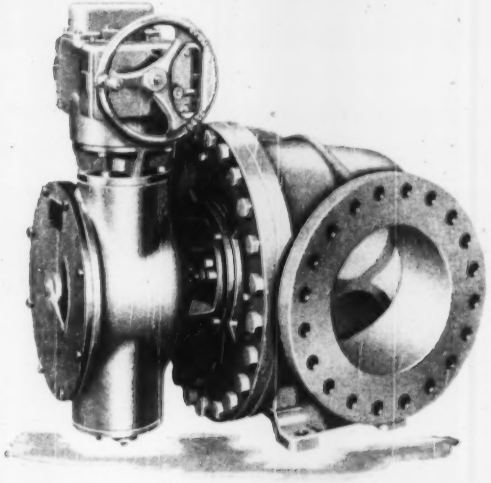

Available with either manual, hydraulic or motor control, and in all sizes to fit any industry! *Shipment from stock.* Send for complete data.

S. MORGAN SMITH Co.
YORK, PENNA. U.S.A.

IRON AND STEEL PRODUCTS—PER 100 LBS. BASE MILL PRICES

	STRUCT SHAPES PLATE	REINF BARS Billet	RIVETS ½ in. and larger Structural	SHEET PILING Base	STEEL RAILS Per Net Ton Standard	Light	Relaying	TRACK SUPPLIES Angle Bars	Std. Spikes	Tie Plates	Track Bolts
Birmingham Area	$3.40	$3.45	$7.25		$88.00	$75.00	Not	$4.40	$5.60	$4.20	
Chicago Area	3.40	3.45	7.25	$4.20	88.00	75.00	avail-	4.40	5.60	4.20	
Pittsburgh Area	3.40	3.45	7.25	4.20	88.00	75.00	able	4.40	5.60	4.20	
Buffalo Area	3.45	3.45	7.25	4.20	88.00	75.00	...	4.40	5.60	4.20	$8.85
Cleveland	"	"	7.25	"	"	"	...	"	"	"	8.85
Youngstown Area	"	3.45	"	"	"	"	...	"	5.60	"	"
Geneva	3.40	"	"	"	"	"	...	"	"	"	"
Los Angeles	4.25	"	"	"	"	"	...	"	5.60	"	"
Pueblo	3.40	3.45	"	"	88.00	75.00	...	4.40	5.60	4.20	8.85

IRON AND STEEL PRODUCTS—F. O. B. WAREHOUSE, PER 100 LBS., BASE PRICE

	STRUCTURAL SHAPES Per 100 lb base price	REINFORCING BARS Per 100 lb base prices: .5 tons to carload lot New billet	Rail steel	switch	Mill extras for Del	EXPANDED METAL LATH Per 100 sq. yd. carload lots Std. ribbed mesh, 3.4 lb	4.0 lb	WELDED FABRIC REINFORCING Per 100 sq. ft. carload lots 4x16 in. No. 5 & 10 wires	4x12 in. No. 5 & 12 wires	6x6 in., No. 6 & 6 wires
Atlanta	$4.75	$5.225‡	$5.225‡	$.025	$.10	$11.50	$11.50			
Baltimore	5.30	4.91f			.10	48.00	43.00			
Birmingham	5.20	5.15	5.15	.05	.15	43.00	45.50‡			
Boston	5.25e	5.50‡	5.50kr		.10/.15	31.00	33.00			
Chicago	5.05	4.10ff	4.10ff	.0625		92.00‡	94.50‡			
Cincinnati	5.50‡e	5.30e				33.00ee	35.00ee			
Cleveland	5.15	4.45‡			.10	34.00‡	36.50‡			
Dallas	6.25	5.40	5.30			43.50	46.00			
Denver	6.45	6.65e				48.00‡	52.00‡e			
Detroit	5.04‡	5.10m			.10	33.00	41.40			
Kansas City	5.65e	5.30e				39.00	41.00e			
Los Angeles	5.40‡‡	5.25g			.15	38.00‡	40.00‡‡			
Minneapolis	5.45‡‡	6.02ff	6.02ff		.15	35.50	36.50			
Montreal	6.25	4.75k	4.75g			44.10k	46.80k			
New Orleans		5.40‡‡		.05	.10	38.50	41.00			
New York	5.45e	5.38	5.33		.20	35.50‡	38.00‡			
Philadelphia	5.25	5.25				34.40‡	36.40‡			
Pittsburgh	4.90/5.00	4.90/5.00			.10	32.50	34.50			
St. Louis	5.30	4.85‡	4.85‡			42.00ss	48.00ss			
San Francisco	6.00tt	5.75e			.15	37.50	40.00			
Seattle	5.40‡	5.35ef				52.00‡mm	42.00mmz			

* A.F.M. • Joliet, Illinois; Donora, Penn., $.10 F.o.b. Mill Monessen, Penn. $.175

* A.F.M. • Joliet, Illinois; Donora, Penn. $.10 F.o.b. Mill Monessen, Penn. $.175

* A.F.M. • Joliet, Illinois; Donora, Penn. $.15 F.o.b. Mill Monessen, Penn. $.175

* At Fredonia Mill

‡ Delivered. a 0.5 tons and 50c. c Less than 1 ton add 50c. e 20 tons or more base. f f.o.b. plant. g Includes delivery in free delivery zone. h 10,000 to 39,999 lbs. j Less than tax exempt. k Provincial and Municipal tax extra. m Plus Dominion premium of add Municipal sales tax. p Price per ton. q Reinforcing. r Intermediate and hard grade, new billet. s Per cwt. t Rolled. u Fabricated. v Asphalt coated. w Note: Revised size extras 4 in. 11 in. 11 in. 10c, 2 in. 4 in. 15c, 1 in. 20c, 4 in. 50c, 2 in. 80c, 1 in. $1.50. x Under 20 tons. Straight. y Copper bearing. z 5.0 lb. per sq. yd. aa 10,000 transportation tax included. bb Copper alloy. cc Delivered truck to add. dd Contractor to erect unloading. ee f.o.b. dock. ff f.o.b. mill. gg Carload lots. hh Including sales tax. ii 10,000 to 19,999 lbs. jj Rolled at Geneva mill. kk 100 lbs. ll 4.27 rolled. mm 2.5 tons. nn 2.5 cliff for mesh. oo Feb. and May correction at $18.50.

PLUMBING, HEATING, WATER, SEWER AND DRAIN PIPE

	C. I. PIPE Per net ton f.o.b. 6 in. to 24 in. x	VITRIFIED SEWER PIPE Per foot, Delivered ASTM C13-44T std. 8 in. **	std. 12 in. **	24 in. de	36 in. de	CLAY DRAIN TILE ASTM C4-24 Per 1,000 ft., carload lots, f.o.b. 6 in.	8 in.	CONCRETE SEWER PIPE Per ft., delivered ASTM C 14-41 12 in.	24 in.
Atlanta	$89.50	$0.43	$0.67	$3.39	$7.00	$114.00	$140.00	$0.45	$2.00
Baltimore	93.86	51	98	3.93	10.00	220.00	341.00	80	2.25
Birmingham	82.50	40	73‡	2.84		210.00‡	325.00‡	60	2.50
Boston	97.46	413ss‡z	835ss‡z	3.60ss‡z	10.00ss‡z	173.00	267.60	1.45‡mz	3.60‡mz
Chicago	96.40	53	1.01	4.25	13.25	150.00‡	270.00‡	70	2.35
Cincinnati	94.00	455	875	3.555	10.50	166.80‡	257.70‡	60	2.25‡
Cleveland	97.13	457‡	885‡z	3.915z	8.405z	140.00	219.00	72 m	2.75m
Dallas	104.28	665	657	2.63	6.25			48	1.60
Denver	104.38	414ff	714ff	2.98ff				74ff	2.50ff
Detroit	92.33	545	1.055	4.39	12.10	200.00m	310.00m	65	2.50
Kansas City	98.41	418m	74m			215.00m		60‡	2.10‡
Los Angeles	111.06	426	927	4.532	11.298	163.60‡	324.60‡	72	2.03‡
Minneapolis	91.86/100.67	62mo	1.12mo	4.55m				1.29A	3.67A
Montreal	90.00	77z	1.35z	4.47z	7.23zz			72.00‡kkz	218.00‡kkz
New Orleans	92.68	433	82	4.41	8.85*	235.00bb	412.00bb	65	2.29
New York	92.80/97.50	55	1.06	4.25	11.60			1.00	2.50
Philadelphia	90.47	54	96	4.08	10.28	235.00‡	300.00‡	1.25A	3.20A
Pittsburgh	97.78	56m	70m	2.70m	6.625m	147.50	230.00	1.05A	2.50g
St. Louis	94.27	48	92	4.80	9.00			1.15‡d	2.45‡d
San Francisco	111.46	55‡	1.08‡	4.68‡	11.79‡	195.00dd	325.00dd	68	2.85
Seattle	112.65	515	916			150.00e		80ee	2.40ee

*WROUGHT STEEL PIPE

Full standard weight

	Mill	Black, Std. Weight	Galv., Std. Weight	Black, Ex. Strong	Galv., Ex. Strong	Black, Double Extra Strong	Galv., Double Extra Strong	Cast Iron Pipe
Atlanta	Lorain, Ohio	33½ to 61%	33½ to 61%	33½ to 61%	33½ to 61%	33½ to 61%	33½ to 61%	A Combination
Baltimore	Aliquippa, Pa.	54	54	54	54	54	54	
Birmingham	Ensley, Ala.	51	51	51	51	51	51	
Boston	Bethlehem, W. Va.	43	43	43	43	43	43	
Chicago	Youngstown, O.	41	41	41	41	41	41	
Cincinnati	Indiana Harbor, Ind.	41	41	41	41	41	41	
Cleveland	Lorain, Ohio	33½ to 61%	33½ to 61%	33½ to 61%	33½ to 61%	33½ to 61%	33½ to 61%	
Dallas	Aliquippa, Pa.	54	54	54	54	54	54	
Denver	Wheatland, Pa.	54	54	54	54	54	54	
Detroit	Ecorse, Mich.	43	43	43	43	43	43	
Kansas City	Pittsburg, Kan.	41	41	41	41	41	41	
Los Angeles	Lorain, Ohio	33½ to 61%	33½ to 61%	33½ to 61%	33½ to 61%	33½ to 61%	33½ to 61%	
Minneapolis	Ensley, Ala.	51	51	51	51	51	51	
Montreal	Wheatland, Pa.	54	54	54	54	54	54	
New Orleans	Ensley, Ala.	51	51	51	51	51	51	
New York	Bethlehem, Pa.	43	43	43	43	43	43	
Philadelphia	Bethlehem, Pa.	43	43	43	43	43	43	
Pittsburgh	Aliquippa, Pa.	54	54	54	54	54	54	
St. Louis	Granite City, Ill.	51	51	51	51	51	51	
San Francisco	Ecorse, Mich.	43	43	43	43	43	43	
Seattle	Ecorse, Mich.	43	43	43	43	43	43	

‡ Delivered. a B. & S. class B and heavier. C.I. Burlington, N.J. class $87.50. b Based on existing freight rates and subject to rate change. c Class pipe and class A, $5 per ton additional. d 6 in., $5 per ton additional; 30 in. and larger, $5 per ton less. e Extra strength, ASTM C 260-41T. f 6 in. $.80 (ASTM C 4-24). g 30 in. h Different pipe. i Reinforced, ASTM C 76-41. k Reinforced. l ASTM C 75-41. m Reinforced. n ASTM C 76-41T. o Centrifugal. p Per 100 ft. q Delivered plant. r Truck deliveries. s Listed price of lined or LCP. t Intermediate. u Less than 5 tons per piece per ft. v Within switching limits. w ASTM C 13-40. x Each. y 2.0 lengths per cwt. 2.5 lengths per cwt. z CISA A 40-1947 specifications apply. aa Not standard specification. ab 4 in. 50 Freight billing is based on weight. ac Not standard. ad Under 50 cu. per. New ae Per L.F. delivered. af Per truck. ag Not standard; only made to order. ah 21"

* WROUGHT STEEL PIPE. Discounts from standard list consumers carload prices. Base price as of Jan. 5, 1950 per net ton. List prices per ft. Butt Weld, ½ in. 8¢; ¾ in. 9¢; 1 in. 12¢; 1¼ in. 15¢; 1½ in. 17¢; 2 in. 23¢; 2½ in. 37¢; 3 in. 58¢; 3½ in. 76¢; 4 in. $1.06; 4½ in. $1.48; 5 in. $1.92. Freight rates to destination to be added to price plus 3 percent tax on transportation.

WROUGHT IRON PIPE. List prices per ft. same as wrought steel pipe. Discount for Butt Weld, Lap Weld and Electric Weld: ½ in. and 1¼ in. Black +10.5 galv. +38.0; ¾ in. Black +7.5 galv. +29.5; 2 in. Black 4 galv. +29.0. Lap weld: 2½ in. to 3½ in. Black +11 galv. +32.5; 4½ in. to 8 in. Black +8 galv. +28.0. Freight rates to destination to be added to name delivered price.

LUMBER, TIMBER, PLYWOOD—PER M FT., B.M., CARLOAD LOTS F. O. B.

SHORT LEAF YELLOW PINE AND DOUGLAS FIR

All S. L. Y. P. is No. 2 common or better and for No. 1 N. C. Box. Prices in Bold Face†
All Fir boards, dimension, planks No. 2, Fir small timbers and timbers are No. 1. Lengths up to 20 ft.
(Prices in italics)

	1x6 s4s	1x8 s4s	2x4 s4s	2x6 s4s	2x8 s4s	2x10 s4s	3x12 Rgh	6x12 Rgh	12x12 Rgh
Atlanta	† **$70 00**	**$71 00**	**$60 00**	**$62 00**	**$65 00**	**$68 00**	**$76 00**	.....	.....
Baltimore	**69 00**	**72 00**	**60 00**	**60 00**	**60 00**	**65 00**	**87 50**	.....	.....
	58 00@	*58 00@*	*58 00@*	*58 00@*	*58 00@*	*58 00@*	*88 00*	*$84 50*	*$84 50*
Birmingham	**73 00**	**76 00**	**63 00**	**65 00**	**68 00**	**75 00**	**85 00**	.....	.....
	68 00	*65 00*	*65 00*	*65 00*	*65 00*	*65 00*	*82 00*	*81 00*	*81 00*
Boston	**86 00**	**86 00**	**91 00**	**91 00**	**91 00**	**96 00**	.....	.....	.....
	91 55	*91 55*	*85 55*	*81 85*	*81 85*	*101 105*	*101 105*	*101 105*	*101 105*
Chicago ‡	**83 85**	**85 86**	**75 76**	**84 85**	**86 87**	**88 89**	**92 00**	.....	.....
‡	**88 00**	*92 00*	*90 00*	*90 00*	*92 00*	*93 00a*	*96 00*	*98 00*	*98 00*
Cincinnati	**76 00**	**76 00**	**76 00**	**78 00**	**82 00**	**85 00**	**93 95**	.....	.....
	68 00	*68 00*	*68 00*	*68 00*	*68 00*	*68 00*	*88 00*	*68 00*	*68 00*
Cleveland	**80 00**	**82 00**	**72 00**	**81 00**	**82 00**	**84 00**	*68 00*	*68 00*	*68 00*
Dallas ‡†	**60 00**	**66 00**	**61 00**	**53 00**	**56 00**	**57 00**	**90 00**	.....	.....
Denver	*Not in stock*		*50 00*	*54 00*	*54 00*	*54 00*	*108 00*	*118 00*	*110 00*
Detroit	**80 00**	**83 00**	**80 00**	**81 00**	**83 00**	**84 00**	.....	.....	.....
	89 00	*89 00*	*90 00*	*89 00*	*89 50*	*88 85*	*94 00*	*97 00*	*97 00*
Kansas City	**98 00**	**105 00**	**105 00**	**112 00**	**115 00**	**117 00**	.....	.....	.....
#	*98 00*	*105 00*	*106 00*	*116 50*	*116 50*	*118 50*	*120 00*	*130 00*	*130 00*
Los Angeles *	*90 00*	*90 00*	*88 00*	*88 00*	*88 00*	*88 00*	*112 00*	*127 00*	*112 00*
Minneapolis ‡#	*115 00*	*115 00*	*115 00*	*110 00*	*115 00*	*110 00*	*185 00*	*185 00*	*185 00*
Montreal ab	70 00	74 00	70 00	72 00	75 00	83 00	.....	.....	.....
	140 00	*140 00*	*140 00*	*140 00*	*140 00*	*140 00*	.....	*188 00*	.....
New Orleans †	**66 00**	**70 00**	**70 00**	**75 00**	**75 00**	**70 00**	*85 00*	.....	.....
†	*68 70*	*68 70*	*71 00*	*75 00*	*78 50*	*78 50*	*87 00*	*87 00*	*100 00*
New York ‡	**92 97**	**95 100**	**87 50 92 50**	**90 95**	**95 100**	**97* 102***	**115 125**	.....	.....
‡			*Range from $85 00 to $100 00*				*97 50 105*	*105 120*	*105 120*
Philadelphia			**Range from $88 00 to $97 00**				**88 97**	.....	.....
			Range from $105 00 to $115 00				*105 115*	*105 115*	*105 115*
Pittsburgh †	**75 85**	**75 85**	**75 85**	**75 85**	**75 85**	**80 90**	**100 00**	.....	.....
†	*80 100*	*80 110*	*90 110*	*90 100*	*90 110*	*100 120*	*120 150*	*120 00*	*120 00*
St. Louis ‡c	**87 75**	**89 75**	**79 50@85 50**	**88 25‡**	**90 50**	**93 75**	**93 25**	**97 5c**	.....
‡c			*100 25‡@107*	*100 25c*	*100 25c*	*105 75c*	*116 00c*	*129 50*	.....
San Francisco †	*65 00*	*65 00* *	*65 00*	*66 00*	*66 00*	*65 00*	*65 00*	*65 00*	.....
Seattle †	*75 00‡*	*75 00‡*	*75 00‡*	*75 00g*	*75 00g*	*75 00g*	*75 00g*	*75 00g*	*75 00g*

† F. o. b. mill. ‡ Delivered. c Retail f.o.b. L.C.L. * Yard prices.

LUMBER: **Bold Face type, Southern Pine.** *Italics, Douglas Fir.* a Spruce. b Tax exempt. c 5M lots. d 8-12 ft. lengths. e 8-16 ft. lengths. f 18 ft. or under. g No. 1 common. h 10-12 ft. lengths. i 8-16 ft. lengths. j 10-16 ft. lengths. k No. 1 common.

PLYWOOD: Special concrete form grade Fir Plywood, 4' by 8' panels, 5-ply, satisfied 2 sides, water resistant glue, carload lots, delivered per 1,000 sq. ft. surface. Seattle base price on ¾" $161.00; on ⅝" $165.00. For other centers add rail freight increment from table on proper page. Oiling and edge sealing charges included. a Lower rate by water shipment. b 50,000 lb. minimum.

* Freight rate increase of 6¢ per cwt., not included in these figures.

	LONG LEAF Y. P. Merchantable grade up to 20 ft. 2x12 Rgh	PLYWOOD Rail freight increment (See note for base price) ¾"*	⅝"*
Atlanta	.....	$22.32	$27.24
Baltimore	$142.00	$140.00	22.86 27.90
Birmingham	115.00	125.00	21.78 26.58
Boston	114.00	114.00	22.86 27.90
Chicago ‡	116/118	116/118	18.72 22.80
Cincinnati	.....	.....	21.78 26.58
Cleveland	.....	.....	22.20 27.12
Dallas ‡†	88.00	88.00	18.72 22.80
Denver	.....	.....	13.92 16.98
Detroit	87.00	.....	21.78 26.58
Kansas City	.....	.....	16.56 20.16
Los Angeles *	200.220f	200.220f	22.86 27.90
Minneapolis ‡#	.....	.....	13.38ab 16.26ab
Montreal ab	.....	.....	16.56 20.16
New Orleans †	100.00	108.00	18.72 22.80
New York ‡	180.00	180.00	22.86 27.90
Philadelphia	.....	.....	22.56 27.48
Pittsburgh †	.....	.....	18.72 22.80
St. Louis ‡c	.....	.....	10.08a 12.30a
San Francisco †	.....	.....	....
Seattle †	.....	.....	....

Range from $88.00 to $97.00
Range from $105.00 to $115.00

GLASS, EXPLOSIVES, CHEMICALS

WINDOW GLASS

Discounts from jobbers list, Feb. 1, 1950

	Single or Double Thickness A quality	B quality
Atlanta	70%c	76%c
Baltimore	80-10%c	82-10%c
Birmingham	67%c	67%c
Boston	60%c	60%c
Chicago	81%	81%
Cincinnati	81-10%	81-10%
Cleveland	81-10-10%	81-10-10%
Dallas	65%j	65%j
Denver	68-2%c	68-2%c
Detroit	81-10-10%	81-10-10%
Kansas City	65-10%k	65-10%k
Los Angeles	56%	61% f
Minneapolis	80-10%	80-10%
Montreal	40-5%bc	40-10-5%bc
New Orleans	81%	81%
New York	85%	85%
Philadelphia	69%c	70%c
Pittsburgh	82%	82%
St. Louis	70-10%c	70-10%c
San Francisco	66%c	73%c
Seattle	54%c	55%c

EXPLOSIVES

Per lb. 40% Ammonia Gelatin in 50 lb. cases delivered in 200 lb. lots*

$0.2025	
.2025	
.1575	
.2025	
.2025	
.2025	
.2425	
.215	
.2075	
.2025	
.2078	
.21	
.2075	
18-1.00a	
.2125	
.3250	
.2025	
.175	
.2075	
.2075	
.21	

Price of 60% Ammonia Gelatin is $0.0125 per lb. higher than 40%¢

Glass: a Jobbers' list price per box, 14 x 20 ins. $12.75 for A quality, $12.70 for B quality; 14 x 20 ins. $10.00 for A quality, $12.75 for B quality. b Discount from list, Sept. 1939; sales tax included, but 6% tax exemption not allowable for. c Single thickness. d Discount from list of Jan. 16, 1946. f as discount. g Discount from list of 1-29-47. k Discount from list of Aug. 15, 1948.

Explosives: * Urban prices influenced by service charges or some storage and delivery regulations do not consistently reflect quantity prices in more congested areas. a In borough of Kings, Queens, and Richmond and in Manhattan south of Canal St., add delivery charge of $0.00 per ton. b F.o.b. cars per 100 lb. Toronto 40%, Toronto 60%, $19.90 c F.o.b. Deloro, Ont. Montreal

40% Ammonia Gelatin price ranges in other than urban areas, per lb. except Seismograph Grades

	C.L. 20,000 lb. net		Tons		200 lb. lots	
E. of the Miss. except Fla. and Me.	$0.155	.17	$0.1825	.20	$0.2025	.22
W. of Miss. to Rocky Mtn. States						
Fla. and Maine	.16	.1675	.1875	.20	.2075	.22
Rocky Mtn. States	.16	.1725	.1875	.20	.2075	.225
Pacific N. W. States	.1575	.17	.19	.2025	.21	.2225
Pacific S. W. States	.155	.1625	.1875	.195	.2075	.2175

PILES, TIES F. O. B.

PILES

Prices per linear foot, fir and pine, bark off, f.o.b. cars, New York. Fir based on Wash. and Ore. points to New York shipping area; pine based on freight from Norfolk.

Dimensions	Points	Length	By Rail Pine*	Fir
12-in. at butt	6-in.	30 to 50-ft.	$0.43	.....
12-in.—2-ft. from butt	6-in.	50 to 55-ft.	.46	.....
12-in.—2-ft. from butt	6-in.	60 to 65-ft.	.50	.....
12-in.—2-ft. from butt	6-in.	90 to 100-ft.	.....	.79
13-in.—3-ft. from butt	5-in.	91 to 100-ft.	.....	.80
14-in.—2-ft. from butt	6-in.	50 to 55-ft.	.50	.87
14-in.—2-ft. from butt	6-in.	70 to 75-ft.	.54	.81
14-in.—2-ft. from butt	5-in.	80 to 85-ft.	.67	.82
14-in.—2-ft. from butt	5-in.	85 to 89-ft.	.....	.83
14-in.—2-ft. from butt	5-in.	90 to 100-ft.	.....	.87

* Pine piling over 80-ft. available only in limited quantities.

RAILWAY TIES

Prices f.o.b. per tie for carload lots.

		6"x8"x8" Untr.	6"x8"x8" Tr	7"x9"x8'6" Untr.	7"x9"x8'6" Tr
Boston	Oak	.....	.....	.....	.....
	Pine	.....	.....	.....	.....
New York	S. L. Sap Pine	$1.65	$2.85	$2.00	$3.30
	Mixed Oak	1.80	3.05	2.50	3.60
Birmingham	Hardwood	1.00	1.60a	...	2.25a
Chicago	Red Oak	2.50	2.60a	.5	52.5 45a
Los Angeles	Douglas Fir	.....	.....	.....	.....
	Redwood	.....	.....	.....	.....
Philadelphia	Red Oak	2.33	3.13a	3.10	4.25a
St. Louis	White Oak	2.45	.....	3.15	.....
	Red Oak	2.35	3.05a	3.05	3.95a
	Sap Pine or Cypress	2.85d	.....	3.70	.....
San Francisco	Douglas Fir	1.28e	2.24e/	1.706f	3.03eaf
Montreal	Birch or Maple	h	h	h	h

Tr.—Treated. Untr.—Untreated. a Creosoted. b 7"x 8" x 8'. c Empty cell. e Green. f F.o.b. cars. h No constant price available. x Not available.

CHEMICALS

Water, sewage treatment, road work, f.o.b. carlots, New York

Bleaching powder in drums f.o.b. works, per 100 lb.	$4.50
Chlorine cylinders, liquid, per lb. f.o.b. works	.07-.12
Calcium chloride, 77-80%, flaked, 100-lb. paper bag, f.o.b. works, ton	22.00
Silicate of soda, 52 deg. in drums f.o.b. works, per 100 lb.	1.80
Soda ash, 58%, in paper bags, per 100 lb. dense	1.35
Sulphate of aluminum, commercial, in 100-lb. bags f.o.b. works	1.50
Sulphate of copper, in bags, 99% per 100 lb. f.o.b. works	7.00

(Continued on page 77)

DID YOU SAY "WHO-O-O?"

It's U.S.G. roof deck contractors, of course...who build

SHEETROCK - PYROFILL

T. M. Reg. U. S. Pat. Off.

poured-in-place gypsum roof decks

It's always wise to stick to the specifications . . . and specifications that call for SHEETROCK-PYROFILL call for your U.S.G. roof deck contractor. *For only U.S.G. roof deck contractors can install* SHEETROCK-PYROFILL *roof decks.*

Not only does the roof deck they build meet the most exacting requirements because it's incombustible, lightweight, strong and easy to maintain . . . it meets your construction schedule because SHEETROCK-PYROFILL is quickly installed—up to 20,000 feet poured a day—and sets in less than 30 minutes.

Besides SHEETROCK-PYROFILL, U.S.G. roof deck contractors also erect roof decks of USG Precast Metal Edge Gypsum Plank and Short Span Tile.

For the name of your U.S.G. roof deck contractor, write Industrial Sales Division, United States Gypsum Company, Chicago 6, Illinois.



Note how SHEETROCK-PYROFILL anchors itself to the steel purlins

United States Gypsum

For Building • For Industry

Gypsum • Lime • Steel • Insulation • Roofing • Paint

HYATTS *pay off* in performance

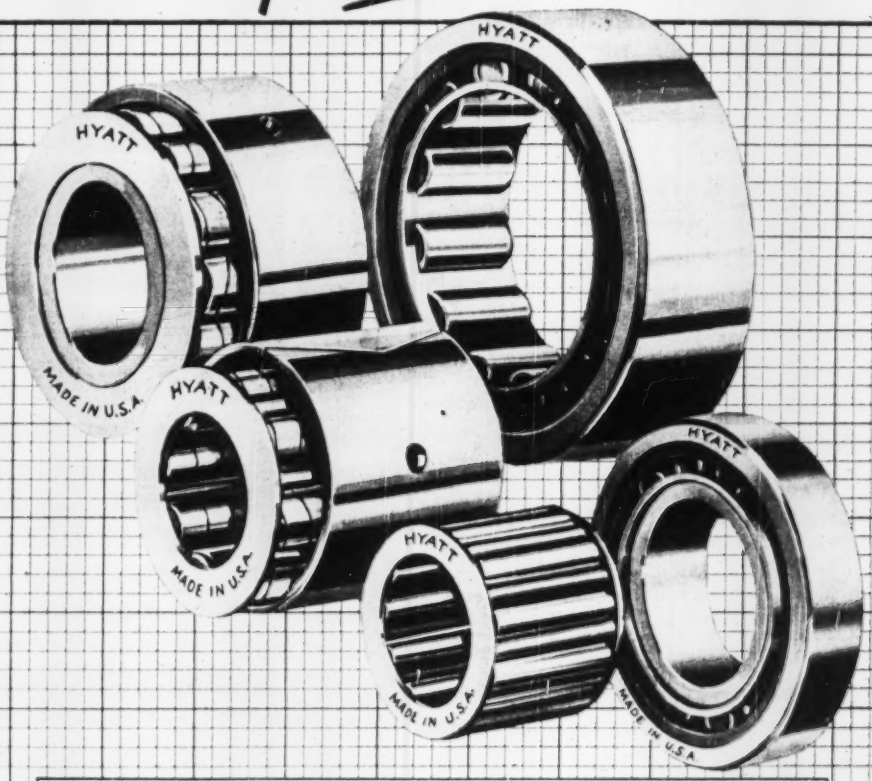

Hyatt Roller Bearings are purposely designed and built *first* to *last*.

And in every application, Hyatts have proved their correct design and built-in quality by their profitable performance in endless types of machines and equipment.

Profitable to the user because of their long-life, ease of maintenance, economy in lubrication and freedom from idle time. Wherever Hyatts are used and for more than half a century in all kinds of applications, it has been proved that Hyatts pay off in performance. Hyatt Bearings, Division, General Motors Corporation, Harrison, New Jersey.

HYATT ROLLER BEARINGS

STRUCTURAL CLAY BUILDING TILE, BRICK AND LIME—DELIVERED

	STRUCTURAL CLAY TILE PARTITION—SCORED			STRUCTURAL CLAY TILE—LOAD BEARING—SCORED			BRICK	LIME	
	Per M, lots of 2,000 pieces or over			Per M, lots of 2,000 pieces or over			Per M, in quantity	Per ton, in paper, Carload lot	
	2x12x12 in.	4x12x12 in.	8x12x12 in.	8x12x12 in.	10x12x12 in.	12x12x12 in.	Common backing	Straight hard	Hydrated finishing	Common hydrated	Pulverized, or lump
Atlanta							$25.00	$25.00	$19.00	$17.50	$17.50
Baltimore	$175.00	$185.00	$325.00	$380.00			33.00[a]	35.00[a]	26.00	20.00	
Birmingham	97.50	104.00	165.00	231.00			20.00[b]	22.50[g]	24.74	16.30	
Boston	140.00[c]	149.00[c]	280.00[c]	317.00[c]			32.00[h]	35.00[h]	30.80[i]	26.40[i]	
Chicago	115.00	122.50	230.00				21.00	23.00	28.50	23.00	
Cincinnati	170.00[j]	180.00[j]	240.00[j,k]	295.00[l]			32.25[h]	44.00[j]	24.25[j]	24.25[j]	24.25[j]
Cleveland	118.00[m]	126.00[m]	236.00[m]				28.50	28.50	24.00	22.00	27.50[m]
Dallas		110.00					18.75	33.25	31.00	21.50	
Denver							32.00	32.00	34.50[n]	25.00[n]	34.00[n]
Detroit	117.08	124.58	234.15		$290.80	$332.22	32.50[o]	31.00[o]	28.00	26.50	
Kansas City	115.50	122.50		245.00	303.50	367.00	24.25[p]	24.25[q]	35.00[p]	32.00[p]	30.00[p]
Los Angeles	[r]	[r]	[r]	[r]	[r]	[r]	20.00[s]		36.00	30.00	32.00
Minneapolis	158.00[p]	176.00[p]	330.00[p]	176.00[t,u,v]			30.00[p]	34.00	35.00[t,u,v]	26.00[t,u,v]	35.00[t,u,v]
Montreal	115.00[w]	125.00[w]	255.00[w]				25.50	35.50	22.40[x]	[y]	22.40
New Orleans	160.00	160.00	300.00				29.00		38.00	26.00	37.50
New York	118.20[z]	126.00[z]	173.30[z]	189.50[z,aa]			33.00		34.40	25.80	
Philadelphia	126.30[r]	134.80[r]	252.60[r]	302.74	361.35	455.74	27.00	30.00	31.00	19.50	24.50[r]
Pittsburgh	98.00	105.80	181.85	202.40	265.35	303.60	26.00	38.00[p]	24.00	19.00	2.97[m]
St. Louis	120.00	135.00	252.00	252.00	339.00		32.50[ab]	30.50[ac]	60.50[ad,ae]	46.00[ae]	1.00[ae,af]
San Francisco	132.00[a]	148.50[a]	198.00[a,ag]	148.50[a]			33.00		25.00	25.00	2.40[m]
Seattle	150.00[ae]	160.00[ae]		160.00[ae,ag]			32.00[a]	39.00[a]	34.00[a,ah]	34.00[a,ah]	3.00[m,ah]

a F.o.b. yard, Roxbury. b Smooth. c Per 50 lb. bags. d 6 x 12 x 12. e 5¼ x 8 x 11½. f Tax exempt. g Sand lime. h 5 x 8 x 12. i Stacked in 3-ft cell. j Delivered but. k 5% 10th following month. l 5¼ x 8 x 12. m Pebble lime price per 50-lb sack. n Price per sack. o Lime not sold per ton. p F.o.b. trucks, job site N.Y.C. q F.o.b. warehouse only. r Truck load or more. s $1.00 discount. t Red lime. u Per 144 x 180 lb. v 7½ x 7½ x 12. w Delivered in Montreal. x Hot lime. y Provincial and Municipal tax extra. z Not used because of earthquake danger. aa 2% discount for cash. ab Select. ac F.o.b. plant. ad Load-bearing non-load-bearing no longer sold in Detroit.

PAINT, ROOFING—F.O.B. CARLOAD LOTS

	RED LEAD	WHITE LEAD	READY-MIXED PAINT			ROOFING SUPPLIES, Carload lots f.o.b. factory			
	Per 100 lb. in 600-lb. (Approx.) 14¢ Dry a	Per 100 lb. in 100 lb. casks In oil a	Per gal., drums Graphite b	Aluminum c	Ferric Oxide d	Rolls, mate surfaced, 55 lb. per sq.	Asphalt felt, per 100 lb.	Tar felt, per 100 lb.	Asphalt coating, per gal.	Tar pitch, 360 lb. bbl, per ton
Atlanta	$14.50	$25.325	$1.75	$2.70	$1.65	$2.00[e]	$2.00[f]	$2.00[f]	$1.00[g]	$36.00[g]
Baltimore	14.25	24.95	2.10	4.27	2.00	2.06	3.04	3.04	.55	36.00
Birmingham	14.50	25.325	3.00	3.40		2.80	2.75	2.75		40.50[e]
Boston	14.25	24.95				2.68[h]		2.67½	.56	34.00
Chicago	14.25	24.95				2.14½	2.54½	2.54½	.84 @ 20bbl	37.00
Cincinnati	14.25	24.95	2.00	2.00		2.44[i]	2.54[i,j]	2.54[i,j]	.35½[i]	40.50
Cleveland	14.25	24.95	2.50[k,l]	2.75[k,l]	2.35	2.20	2.20	2.20	.30½	31.00
Dallas	14.50	25.70		4.05		3.50[h]	3.75[e]	4.35[e]	.36	46.00
Denver	14.75	25.45	2.63	4.38	2.48	3.20[e]	2.20[e]	2.20[e]	.41[i]	40.00
Detroit	14.25	24.95[m]	2.35	3.30	2.50	2.20	2.29[f]	2.29	.418	35.00
Kansas City	14.25	25.07							.45	
Los Angeles	14.25	25.20	2.80	3.75	3.80	2.41	1.91[e]	[n]		
Minneapolis	14.25	25.07, 25.55				2.20[h,o]	2.29[h,o]	2.29[h,o]	.33[h,o]	.34.00[e]
Montreal		22.00	3.75[i]	4.20[i]	3.60[i]	3.25[i]	3.00[i,p]	3.00[i,p]	.70[i]	2.50[i,q]
New York	14.25	24.95	3.45[r]			2.32	2.41[e]	2.41[e]	.34[s]	35.00
Philadelphia	14.25	24.95	3.25[t]	3.65	3.15	2.34	2.04	2.04	.37	26.00
Pittsburgh	14.25	24.95	2.00	2.00	1.90	2.75	2.81[e]	2.81[e]	.37	38.00
St. Louis	14.25	24.95				2.30[i]	2.30[i]	2.30[i]	.38	37.00
San Francisco	14.25	25.20	1.80	2.75[u]	1.35	2.27	3.05[e]		.38[g]	
Seattle	14.25	25.45	2.51[m]	2.67[m]		3.23[m,v]	2.73[m,e]		.51[m,e]	48.75[m,e]

a Delivered. Note: Red lead in oil 50¢ higher than white lead in oil. b Red lead prices change frequently due to tonnage changes. c U. S. War Dept. Spec. 3-49A. d ASTM Spec. D260-31. e 80% minimum ferric oxide. f 15 lb. g Per 432 sq. ft. h Per roll, 65 lb. i Net carload lot prices. j Minneapolis and vicinity. k Asphalt pitch. l Per cwt. m 1% discount for cash. n Max. 1944 price. o Per 60 lb. p Delivered. q Per 90-lb. roll. r F.o.b. factory, Chicago. s ASTM Spec. D226-43 (Federal tax included). t Per 90-lb. package. u Per ton, in tanks. v Approximate cost per 100 lbs. w Roofers quoting asphalt and cement. Price per ton. x I.C.L. truck delivery. y 2% cash discount. z Asphalt, in 100-lb. package. aa F.o.b. factory.

SKILLED AND COMMON WAGE RATES—PER HOUR

	Bricklayers	Carpenters	Struct.-Iron Workers	Hoisting Engineers	Plasterers	Electrical Workers	Steamfitters	Common Labor—Building	Common Labor—Heavy Const.
Atlanta	$2.50	$1.85	$2.125	$2.00	$2.25	$2.25	$2.00	$0.90	$0.95
Baltimore	3.00	2.35	2.65	2.40-2.80	2.50	2.40	2.40	1.35	1.35
Birmingham	2.50	1.90	2.20	1.87½	2.20	2.25	2.25	1.00	1.10
Boston	2.775	2.25	2.55	2.90	2.70	2.60	2.65	1.75	1.75
Chicago	2.55	2.45	2.50	2.45	2.55	2.525	2.45	1.80	1.80
Cincinnati	2.575	2.25	2.425	2.375	2.425	2.45	2.40	1.535	1.535
Cleveland	2.70	2.525[a]	2.70	2.70	2.70	2.70	2.70	1.975	1.85
Dallas	2.50[b]	2.125	2.25	2.25	2.50[b]	2.375	2.375	1.075	1.275-1.50
Denver	3.00	2.10	2.10	2.25-2.50	2.50	2.41	2.40	1.40	1.45
Detroit	2.75	2.325	2.575	2.575	2.625	2.90	2.50	1.80	1.80
Kansas City	2.65	2.20	2.37	2.425	2.80	2.475	2.55	1.625	1.625
Los Angeles	2.625	2.12	2.35	2.07	3.125	2.50	2.50	1.57	1.57
Minneapolis	2.40	2.12	2.27.5	2.07	2.50	2.35	2.32	1.52	1.52
New Orleans	2.50	1.875	2.25	2.125	2.175	2.30	2.25	1.025	1.025
New York	3.200	2.750	3.00	3.00	3.250	3.00[c]	2.750[c]	1.70	1.70
Philadelphia	3.00	2.34-2.40	2.65	2.50	3.00	2.75-3.00	2.75	1.375	1.675
Pittsburgh	3.00	2.50	2.625	2.65	2.625	2.575	2.80	1.50	1.50
St. Louis	2.833[c]	2.456	2.50	2.55	2.50	2.55	2.50	1.60	1.50-1.75
San Francisco	3.00[d]	2.225	2.50	2.19	3.00	2.50	2.50	1.55	1.55
Seattle	3.00	2.195	2.595	2.63	2.695	2.595	2.50	1.795	1.63
Montreal[e]	1.40	1.25	1.25	1.20	1.40	1.35	1.55	.90	.80

a 6 hr. day. b 7 hr. day. c Incl. 3% vacation stamp fund for bricklayers; 2½% for electricians. d Cost of living bonus now included in base wage. e Incl. 3% for tool replacement. f Plus $1.00 daily bonus. g $2.20 bonus and housing. h 5¢ vacation fund. i Incl. 2½% welfare.

MEXICO CITY PRICES

In Pesos, F.o.b. City		Mar. '50	Apr. '50
Common Wages—Building			
(8 hr. day)	av. per hr.	.53	.53
Common Wages—Heavy Const. (8 hr. day)	av. per hr.	.60	.60
Skilled Labor Wages			
Carpenters (8 hr. day)	av. per hr.	1.88	1.88
Bricklayers (8 hr. day)	av. per hr.	1.50	1.50
Struct. Iron Workers (8 hr. day)	av. per hr.	1.50	1.50
Struct. Steel Shapes			
3" 15" x 12 meters	per ton	925.25	925.25
Reinf. Steel, Corr. Rods			
⅜" x 11 meters	per ton	1,010.00	1,025.00
½" x 11 meters	per ton	1,000.00	1,025.00
⅝" x 11 meters	per ton	990.00	1,005.00
¾" x 11 meters	per ton	980.00	1,005.00
⅞" x 11 meters	per ton	980.00	1,005.00
1" x 11 meters	per ton	980.00	1,005.00
Gravel, truck load of 3½ cu. meters			
Blue Gravel	per tr. load	31.00	32.00
Red Gravel	per tr. load	33.00	34.00
Cement, Std. Port. (Tolteca)	per ton	120.00	123.00
Lumber			
Mex. Sacred Fir (Oyamel)	per M ft.	400.00	400.00
1st Class Pine	per M ft.	750.00	750.00
2nd Class Pine	per M ft.	480.00	480.00

ENR Skilled Average: Bricklayers, Carpenters, Ironworkers, $2.180. **ENR Common Average:** $1.311.

CONSTRUCTION REPORTS

Bids Asked—Low Bidders—Contracts Awarded

Compiled by Business News Department—Engineering News-Record, 330 W. 42nd St., New York 18, N. Y.

ELSIE EAVES, Manager *J. A. MAHONEY, Reports* *M. R. ROESSLER, Statistics*

WATER SUPPLY

BIDS ASKED

Ark.—Fayetteville (P.O. Box 178)—City, incl. water and sewer ... Plans deposit $10. Fayard Bldg., Little Rock engr.

Ill.—Sullivan (P.O. R. R. 3)—City, WW and sewerage ... $2,000. Warren & Van Praag, Inc. ... engr.

Ala.—Mobile (P.O. 1110 City Hall)—... appurtenances to ... Water Supply. Plans deposit $... Joseph St. ...

Pa.—Smithton (P.O. R. D. 1)—Municipal Auth., Smithton ... stampings, trim and fittings ... water mains. Plans ... Engineers, 219 East Park ...

S. C.—Florence (P.O. Box 211)—City, c/o H. N. Thomas, ... Approx. $100,000. ...

Tex.—Sweetwater (P.O. Box 211)—City, WW, $10,000. ... Administration Bldg., Abilene, engrs.

Calif.—Oakland (P.O. Box 12)—East Bay Municipal Utility ... Plans ... Pumping Plant at Pardee Reservoir, Spec. ...

Tex.—Pleasanton (P.O. Box 12)—City, WW, $55,000. ... 1624 Tesoro Tower, San A. ...

Fla.—Pompano (P.O. Box 1)—City, incl. WW, pump ... Roberts Bldg., Jacksonville, engrs. CD ...

Tex.—Dallas (P.O. City Hall)—... Water Mains and Sewers, $25,000,000 ... Plans ...

LOW BIDDERS

N. D.—Minot (P.O. ...)—Apr. 11, ... Henry Pump Co., ... plant, ... $142,028. Pfeifer & ... Wahpeton, Minn. engrs.

Pa.—Allentown (P.O. State Auth. 28 and Hamilton ...)—... $114,600. ... Brick Row, ... $75,684. ...

CONTRACTS AWARDED

Del.—Dover (P.O. ...)—R4 WW, Kent ... Dover Water Dist. ... $53,431. ... & K. Engr. ...

Ont.—Peterborough (P.O. County ...)—... water mains in various ... $75,144. ... Gilbert, Carter, 223 ... St. ...

SEWERS, WASTE DISPOSAL

BIDS ASKED

Ariz.—Casa Grande (P.O. ...)—Sewage, 19,062 ft. ... Sanitary sewers, house lines, ... 1,902 ft. ...

Ill.—Carbondale (P.O. ...)—... sewage treatment ... Plans deposit $... Engineering Bldg., ... engrs.

Tex.—Port Arthur (P.O. ...)—... sewer ... $55,000. ... Arthur engr.

Ala.—Anniston (P.O. ...)—... Town ... Anniston engr.

LOW BIDDERS

Calif.—Sunnyvale (P.O. ...)—Sanitary Dist. ... $178,112. ...

CONTRACTS AWARDED

▲ N. Y.—New York (P.O. ...)—P. Wks., Municipal Bldg., Zone 7, municipal Sewage Treatment Works, Contr. 3, A. Harris Point intercepting sewers to Tallman Island, ... 12 ft. ... Bronx River, Long Island Sd., ... $2,640,300. ... Bronx River Siphon and ... one 10'0" lowdrop shaft and an 18'6" ... sewer ... Bronx River, connecting two sets of intercepting sewers, ... Quirk Const. Co., 94 Dahlgren ... Zone 9, $517,610. Bids 3/7. CD ...

Tex.—Beaumont (P.O. ...)—Beaumont storm sewers ... Project No. 49 in ... 237 to Neches River by-pass, to ... & Thomas, ... Crockett St., $534,573. Bids ... 4.25% ... LB.

Wash.—Texas Town (Town Hall, treatment plant and ... sewers, to A. H. Sandall, Hyde Bldg., Spokane, ... $99,993. CD 2/1/24.

BRIDGES

BIDS ASKED

Ont.—Zurich (P.O. ...)—... H. W. Brokenshire, c/o Hwy. ... Zurich, ... 1" concrete slab frame bridge ... Approx. $55,000. Plans deposit $... ...

Ill.—Chicago (P.O. ...)—City Dist. Purchases, Contr. ... & Norman, ... Hoyt Ave. ... Substructure and deck, Hoyted St. ... Expected date CD 4/14. ...

† Colorado (P.O. Airport Bldg., ...)—U. S. Eng., P. O. Box ... Albuquerque, N. M. bridge and ... Arkansas River, Manzanola, Serial No. CIVENG- ...

Ala.—Mobile (P.O. ...)—... Mobile Co., Bd., Bruner & ... Wyman, ... reinforcement ... Plans deposit $1. ...

Fla.—Miami (P.O. ...)—... Dade Co., Courthouse, Miami, ... Plans deposit $... CD 4/11. ...

LOW BIDDERS

Calif.—Sacramento (P.O. ...)—... Co., Courthouse, Apr. 19, ... Bridge ... Sacramento River, from ... & ... $526,299. CD 4/11. ...

Mass.—Newton (P.O. ...)—... Apr. 19, ... Wks., ... & M. R. R. and Bridge St., ... EASTON ... 111, Station ... from T. R. Rice, ... Williams, $781,125. CD 4/4. ...

▲ N. Y.—Atlantic Beach (P.O. ...)—... Bridge Auth., ... Bridge, ... Nassau Co., ... $5,765,306. ... 211 Broadway, New York, Zone 7. ...

PROJECTS COVERED

Projects—By Size

Construction projects here reported cover the United States and Canada and are of these minimum sizes or larger: water supply, earthwork, waterways $50,000; other public works $50,000; industrial buildings $100,000; other buildings $250,000.

Classes of Construction

(Name in order of Listing)

Water Supply — Latin America
Sewers, Waste Disposal — Public Buildings
Bridges — Commercial Buildings
Streets & Roads — Industrial Buildings
Earthwork, Waterways — Unclassified

Stages Reported

Preliminary: Including appointment of engineers or architects. For full ...

Low Bidder: ... Except where award is not ... report will be published. ...

Awarded: ... Except projects on which bids ... report was published. ...

Symbols and Abbreviations Include:

* ... estimate
▲ ... $1,000,000 or over.
FA ... Asst.
ENR ... News-Record
CD ... News-Record Construction Daily

Ohio—State Hy. Dpt., T. J. Kauer, Dir., Columbus. Zone ... 1 steel ... reconstruct ... the floor system and superstructure of an existing 3" steel truss ... Hatcher Bros., 116 Schoonover, Mt. Junction, ... $84,563. Est. $114,000. Bids 4/11. CD 4/4. ...

▲ Pennsylvania—Pennsylvania Turnpike Comm., 11 N. 4 ... Harrisburg. Construction of bridge to carry ... waters over ... of Pennsylvania Turnpike over Allegheny ... Contract ... for ... carrying bank of river easterly to Turnpike Centerline ... on the left bank ... Allegheny ... American Bridge Co., Broad Street Station Bldg., ... $2,135,576. Bids 3/24 (amount 4/20 CD) ... Jan. LB. ...

Virginia—State Hy. Dpt., Richmond, Apr. 18, repairing ... Rappahannock River ... Fredericksburg, U.S. ... Prince ... from W. F. McCoy, Inc., ... $49,644. ... Division of the Southern R. R. and ... Co., to ... Rappahannock River on Route ... in Alexandria, ... 3.6 mi. ... to raise low stretch of U. S. ... 24 and ... Division of Atlantic Coastline Co., ... Prince ... from ... 1210 Tennessee St., ... Salem, $301,342. 244 ft. ... bridge over North River ... and 0.17 ... Salem. Subcontracts: Paving, Salisbury Paving and ... Augusta Co.; steel from Moore Bros., ... $53,563. CD 4/4. ...

CONTRACTS AWARDED

La.—New Orleans—New Orleans R. R. Terminal Bd., City ... Plans ... 23rd ... Bridge, ... Bridge, ... Nos. Orleans St. ... Contract ... 1515 ... $585,944. Bids 4/11. ...

Missouri—State Hy. Comm., Jefferson City, painting steel ... Missouri River, ... 40 ... Co. River Proj. ... Mo. 1 ... Contract ... $52,444. ...

▲ Pennsylvania—State Hy. & Bridge Auth., Harrisburg, ... State girder and I-beam viaduct to carry S. R. 11 ... Bridge, ... Bridge Auth., Harrisburg, ... Bridge between ... Fayette ... Pa. ... Bridge, ... 212 Wood St., Pittsburgh, $2,007,245. ... Bridge, ... Bros., ... $142,000. ... Contract ... 4/10. ...

Wash.—Spokane (P.O. ...)—... Co., Courthouse, ... bridges throughout county, by ... $234,000. C. J. Collins, ... engr. ...

STREETS AND ROADS

BIDS ASKED

La.—Metairie (P.O. ...)—Jefferson Parish Police Jury, ... Plans ... Engineering, 423 Masonic ... New ...

† Tex.—El Paso (P.O. ...)—U. S. Eng., Box 1538, ... Contract ... Sewers and driveways ... Eng., 24,000 ... $2,41 ... date CD 4/21. ...

Calif.—Los Angeles (P.O. ...)—... Dist., Los ... Inglewood Ave. ... Imperial Hy., Inglewood, $1,0... Arroyo ... engr. ...

† Nebraska (P.O. ...)—... U. S. Eng., 601 ... Bldg., Kansas City, Mo., ... road, Harlan County dam site on Republican River ... mi. ... part of Alma and 2½ mi. southeast ... Mo. ...

† N. M.—Albuquerque (P.O. ...)—... U. S. Eng., Box ... Contract ... $241,000. All ... $94,000. ... Plans deposit $25. CD 4/12. W. C. Knight, A. ... Engineer, Eng. Bldg., Box 757, Los ...

LOW BIDDERS

California—... Hwy. Bd., ... Apr. 19, plant mix ... between ... mi. west of Cisco and ... Contract ... $108,415. ... Wilson ... Francisco. ... Contract ... bridge with ... concrete deck ... between ... Z ... and 2 mi. east of South ... Contract ... Riverside Co., ... Contract ... $106,892. ... mix ... on ... between ... mi. south of Lagoon Summit ... mi. ... Contract ... Co., ... Merced ... Contract ... & Mincks-Kasser Co., Co. 2 and ... Contract ... $203,178. ... shoulder ... mix surf. ... 3 reinforced ... bridges 20.6 mi. ... Contract ... Southern Boundary, Proberta, Tehama Co., ... Contract ... Box 673, Sacramento, $580, ... 574. ...

California—State Div. Hwy., 120 S. Spring St., Los Angeles, Apr. 20, plant mix surf. 7.5 mi. Sepulveda Blvd., between Sunset and Ventura Blvds., Los Angeles ... Los Angeles ... from Schuster & Son, San Valley ... Idaho, $179,872. ... Contract ... 2 ... bridges ... Bridges at ... separation structures 1 ... Contract ... Bridge, ... $60,207. ... Ac ...

(Continued on page 80)

LOADING MOTOR GRADERS MADE EASY BY FOLDING GOOSENECK

Loading equipment quickly, and without ramps or cribbing is possible with a new patented "Carryhaul" Folding Gooseneck recently introduced by the Martin Machine Company, Kewanee, Illinois. The new trailer features a Folding Gooseneck which, when lowered to the ground, forms a loading ramp. Front end loading permits a very low platform height, assuring greater safety, greater clearance of viaducts, bridges, wires. The new trailer is available in capacities up to 100-tons. Like other Martin "Carryhaul" trailers the new Folding Gooseneck is being sold exclusively through "Caterpillar" dealers everywhere.

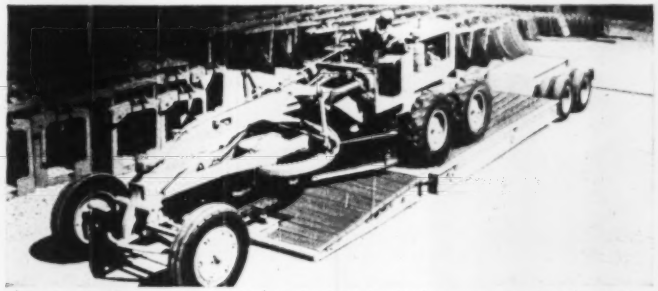

New Folding Gooseneck lowered to form ramp for loading motor grader. No loading ramps or cribbing are required. Loading is completed in a few minutes.

Below: Folding Gooseneck raised to towing position. Low platform height offers greater clearance, safety.

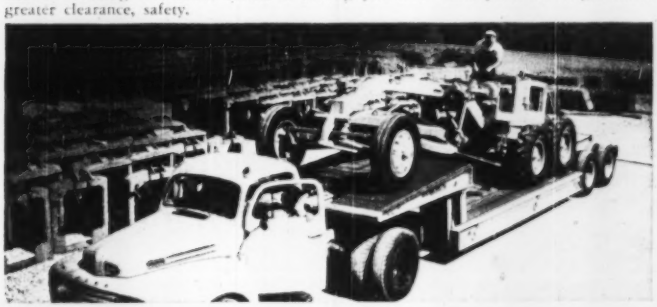

World's Largest Folding Gooseneck Trailer

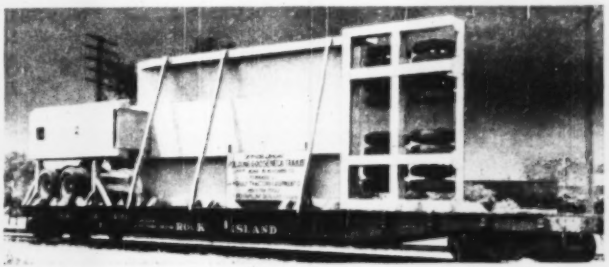

Loaded for shipment to Humble Oil Company, West Baytown, Texas, this 65-ton Martin Folding Gooseneck trailer stood 17 ft., 4 in. high on the car. A 2 in. head clearance permitted travel in daylight only.

MARTIN

PRESENTS THE NEW

FOLDING GOOSENECK TRAILER

TO CARRY



... TO LOAD OR UNLOAD

MARTIN CARRYHAUL TRAILERS

MARTIN MACHINE COMPANY

KEWANEE, ILLINOIS—YOUR CATERPILLAR DEALER IS YOUR MARTIN DEALER

Write for complete information and specifications on the new Martin FOLDING GOOSENECK TRAILER.

(Advertisement)

FOR FLOOD CONTROL OR FLOODS OF WATER

Fairbanks-Morse Propeller Pumps

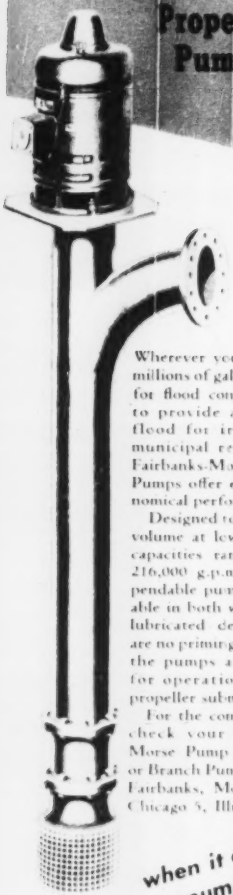

Wherever you must move millions of gallons daily . . . for flood control work or to provide a man-made flood for irrigation or municipal requirements, Fairbanks-Morse Propeller Pumps offer efficient, economical performance.

Designed to supply high volume at low head, with capacities ranging up to 216,000 g.p.m., these dependable pumps are available in both water and oil lubricated design. There are no priming delays since the pumps are designed for operation with the propeller submerged.

For the complete story, check your Fairbanks-Morse Pump Distributor or Branch Pump Engineer. Fairbanks, Morse & Co., Chicago 5, Illinois.

when it comes to pumps . . .

FAIRBANKS-MORSE

A name worth remembering

DIESEL LOCOMOTIVES • DIESEL ENGINES • PUMPS • SCALES
MOTORS • GENERATORS • STOKERS • RAILROAD MOTOR CARS
AND STANDPIPES • FARM EQUIPMENT • MAGNETOS

(Continued from page 78)

San Bernardino Co. from Hess Contr. Co., 2303 E. Artesia Blvd., Long Beach, $372,648; plant and surf. to 1 mi. between Main and Cromwell, Lake, San Bernardino Co. from Basich Bros. Constr. Co. & Basich Bros., 3850 S. San Gabriel Blvd., San Gabriel, $292,600. CD 3-27.

Ill., Chicago, City Dept. Purchases, Contracts & Supplies, City Hall, Apr. 17, bonds: Argyle St. from Broadway to Marine Dr., from A. Guzzardo Midwest Corp., 3225 [illegible], $114,367.

Maryland, [illegible], Baltimore, Apr. 18, b. [illegible] Kenwood Ave. and [illegible] Rd., from Bradshaw Constr. Co., 8405 Belair Rd., Baltimore, low bids: $42,359 alternate, $45,642 [illegible] Co., [illegible] Rd., from [illegible] Co., [illegible] Rd., from [illegible] Co., [illegible] Rd., from

New York—Bureau Contracts & Accounts, Albany, until [illegible] to carry Route [illegible] over [illegible] and Erie R. R. tracks at Newburgh, Orange Co.; Lehigh Construction Co., Inc., Box 23, Ellenville, $542,051. Bids 4/28. CD 1/30, under $1M.

Ohio—State Hy. Dept., T. J. Kauffman, Columbus, Zone 15, bid to Proposals Nos. [illegible] S. R. 3, 668, 247, and S. R. 123, Mahoning and Brown Counties, and bid to Proposals Nos. [illegible] S. R. 3, S. R. 14, Lawrence County, to E. P. Evatt Co., 521 Shepherd Ave., $56,676, est. $61,[illegible]; and $59,972, est. $61,840; respectively; for Proposals Nos. [illegible] S. R. 30, S. R. 62, S. R. 39, S. R. 13, Ashland County, and Miscellaneous Bridges to Haught-Hall Co., Box 302, Marion, $50,125, est. $60,37[illegible]; bid to Proposals 1 to 4 inclusive, S. R. 66, S. R. 224, S. R. 224, Paulding and Van Wert Counties, to Gale St. Van Wert, $68,960, est. $[illegible]; bid to Proposals 1 to 6 inclusive, S. R. 282, S. R. 372, S. R. 555, S. R. 664, Athens and Morgan Counties, to Walter H. Jones, Route 1, Wooster, $60,569, est. $76,90[illegible]; bid to Proposals 1 to 6 inclusive, S. R. 6, S. R. 20, S. R. 224, S. R. 269, Wood and Henry Counties, to Fred J. Creager & Sons, Box 61, Bowling Green, $58,304, est. $73,14[illegible]; bid to Proposals 1 to 6 inclusive, S. R. 166, S. R. 166, S. R. 528, S. R. 86, S. R. 306, Geauga and Lake Counties, to A. J. Rohrer, Inc., Box 249, Burton, $50,437, est. $61,37[illegible]; grading, drainage, paving, 1 span concrete slab, concrete slab structure, bridge No. HA-145, on A. S. R. 141, Gallia Co., to Harley E. Curry & Son, Marietta, $74,229, est. $93,000; grand total, $[illegible]. Bids 4/11. CD 4/4.

▲ Pennsylvania—Pennsylvania Turnpike Comm., 21 W. 4 St., Harrisburg, construct structure carrying drainage pipe, Sect. 31, Western Extension, Pennsylvania Turnpike from point approx. 1 mile ft. west of Interstate Rte. 70, to Penn Twp., near point, approx. 421 ft. east of Mercer-Fayette Rd., Patton Twp., 2.93 mi., Allegheny Co., to Ruffing Bros., Inc., 1560 Liberty Ave., East Pittsburgh, $1,664,781. Bids 4/27. CD 4/4, under $1M.

▲ Pennsylvania—State Hy. & Bridge Auth., Harrisburg, Schedule 1, construct dual highway consisting of reinforcement pavement 24 ft. wide on each side of an earth divider area 22 ft. and appurtenant work, and 3 reinforced concrete bridges, 1 of which is curved and variable in width, over Lehigh Bridge and at existing pavement, also construct dual highway consisting of reinforced pavement 24 ft. wide on each side of an earth and concrete divider area 10 ft. and appurtenant work, and 2 reinforced concrete bridges, 1 of which is curved and variable in width, over Lehigh Bridge and at existing pavement, also construct dual highway consisting of reinforced pavement 24 ft. wide on each side of an earth and concrete divider area 10 ft. and appurtenant work, and 1 reinforced concrete bridge

NEW PLANT TURNS PINES INTO PAPER!

Southern pines are made into 100,000 tons of newsprint annually in this huge plant of the Coosa Newsprint Co., Childersburg, Ala., shown under construction. Ingalls fabricated and erected the dozens of processing and storage tanks.

When you need fabricated steel work of any type, plate work, as well as structural, contact INGALLS, one of the nation's leading independent fabricators. Five plants, complete engineering staff. Write for information.

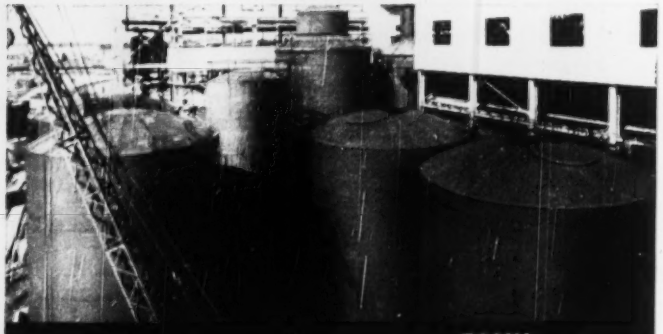

STRUCTURAL STEEL • PLATE WORK
STAINLESS STEEL • STORAGE TANKS
SHIPS • SHIP CONVERSIONS
BARGES • WORK BOATS

BIRMINGHAM TANK DIVISION
THE INGALLS IRON WORKS COMPANY
MAIN OFFICE: Birmingham, Ala.
Sales Offices in New York, Chicago, Pittsburgh, New Orleans.

"BERG"
CONCRETE SURFACER MODEL A

"Berg" equipment is used extensively for surfacing and finishing applications on concrete construction.

The many "BERG" Models available, permit exact selection for your particular application.

The distinctive "BERG" features give you the kind of results that are realized in better quality work, combined with lower costs.

"BERG" Heads and Attachments are interchangeable, thereby providing adaptability for vibrating, wire brushing, sanding and polishing applications.

THE CONCRETE SURFACING MACHINERY CO.
4667 SPRING GROVE AVE.
CINCINNATI 32, OHIO

"Gunite" Florida Service, Inc.
air applied concrete specialists

1063 Ponce de Leon Blvd. Coral Gables, Fla.

- Repair all types Disintegrated Concrete
- Dam Reconstruction and repairs
- Linings and repairs for Reservoirs, Stacks, Bunkers, Sewers, Tanks, Tunnels, Pen Stocks
- Structural Steel Encasements
- Restoration of Masonry Structures

All work under the supervision of Harvey M. and Victor S. Anderson, using the latest equipment.

Work executed anywhere in the U. S. A. and Latin America

Write for our new illustrated brochure

MOVING, RAISING, HEAVY SHORING, UNDERPINNING
National Operations

E. F. DAVID HOUSE MOVING CO.
Registered Engineers
1548 SO. VANDEVENTER AVE.
ST. LOUIS 10, MO.
Tel. Grand 3092
Established 1886

† New York B A S 5-10—U. S. Eng. 90 Lafayette St., New York, Zone 13. Rock protection proj. on Passaic River, Suffern, Extended bids CD 4-13.

Pennsylvania B A S 5-10—General State Auth., 18 and Herr Sts., Harrisburg. Excavation in portions of Lake Red and adjacent areas and use of excavated material to construct beaches, bridge approach, parking and roadway at Shawnee State Park and Shawnee Road control recreational dam. $20e,000. Plans, Proposal $10. Witness right. Stevenson & Ingram, 225 S. 15 St., Phila. Zone 2. Engrs. CD 4-12.

† Ohio B A S 5-12—U. S. Eng., Madison Ave. and 9 St. West, Huntington 26. W. W. pump station, levee protection works, on Tuscarawas River at Zoar, Tuscarawas Co. Dover Reservoir Proj., Serial No. CIVENG 46-222-50-87. CD 4-11.

† Mississippi B A S 5-16—U. S. Eng., P. O. Box 97, Memphis 1, Tenn. approx. 4½ m. channel clearance, approx. 100,000 cu. yd. excav. located along Hatchie River at Arkansas-Tippah County line, beginning at junction of Little Hatchie and Hatchie Rivers about 1 mi. north of Arkansas-Tippah Co. line and extends in south easterly direction upstream approx. 4½ mi. CIVENG 40-241-50-146.

† Florida B A S 5-19—U. S. Eng., P. O. Box 4970, Jacksonville. Excavating Cimal Ditch 042 west of Ft. Lauderdale, Central and Southern Florida Flood Control Proj., extend from intersection of Levees L-35A and L-36 northeast of Ft. Lauderdale south along toe levee existing west borrow pit for 40 ft. Range 1 and 2 and Township 49 South, New River Canal, for 40 ft. CIVENG 96-191-50-86. CD 4-12.

† Oregon B A S 5-23—U. S. Eng., 19 E. Porter St., Walla Walla. Rock excav. levee and rein. conc. structures along Mill Creek, Walla Walla, Wash. Stations 200 to 1200, extended bids CD 4-5.

† Minn., Minneapolis B A S 5-23—U. S. Eng., 1217 [illegible] Bldg., Minneapolis 1. [illegible] Zone 1. [illegible] Rock excav. [illegible] extended date CD 4-13.

LOW BIDDERS

▲† California [illegible] Reclamation, Dist., Interior, Fresno. Aux. earthwork, concrete lining and structures, Delta Mendota Canal, 1 proj. 19 mi. in Sec. 32 T 12 S R 5 E to Sec. 1 T 13 S R 11 E. $427,134 [illegible] $1,207,253

† Florida [illegible] Corp., 5601 Atlantic Ave., Ventnor, N. J. $970,200

▲† Oregon [illegible] Portland Zone 1. Apr. 28. Clearing, earth excavation, concrete structures and miscellaneous railway facilities [illegible] Reservoir No. 2 [illegible] southeast of Portland [illegible] $18,644,031 [illegible] $19,995,475 CD 2-10.

CONTRACTS AWARDED

La., Alexandria City Hall Comm., 2, Room [illegible] Apr. 10. [illegible] City Hall, $640,746. Bids 4-20. CD 4-26.

AIRPORTS

LOW BIDDERS

Va., Richmond PARKING APRON, State of Virginia, [illegible] Richmond Municipal Airport, Byrd Field, Apron, Taxi Strip and Taxiways A, B, C, D, E, F, G, Bowles, [illegible] $136,734. CD 4-18.

Wash., Seattle [illegible] MP PLANT etc. Port of Seattle, [illegible] Terminal, Zone 1. Apr. 19. pump plant, [illegible] $78,839

CONTRACTS AWARDED

▲ Minn., Minneapolis [illegible] Paving and [illegible] Minneapolis-St. Paul Metropolitan Airport, [illegible] Apron, Taxiways, [illegible] $1,017,751. Bids 4-21. CD 4-26.

† O., Cleveland [illegible] Apron, [illegible] $650,000. CD 4-18.

▲ R. I., Warwick [illegible] Apron, [illegible] $1,197,716. CD 4-19.

PUBLIC BUILDINGS

BIDS ASKED

Mo., Mexico [illegible] Armory, [illegible] Zone 1. [illegible] CD 4-27.

Ont., Toronto (North York)—SCHOOL—B.A. 5/9—Allward & Gourlock, archts., 57 Bloor St., W., brick, concrete, block school, King High Ave., for First Two School Areas of North York, H. M. Brownlee, secy., Wilson Ave. and Avenue Rd. Approx. $250,000. CD 12/15/49.

▲ Conn., Danbury—COLLEGE—B.A. About 5/10—State, Reymond K. Thatcher, State Capitol, Hartford, two wings, auditorium and gymnasium, classroom bldg., Teachers College, Seventh Ave. and Osborne St. $1,000,000. Philip N. Sunderland, Inc., 81 West St., archt. CD 10/17.

▲ Ky., Oklahoma—SCHOOL—B.A. 5/10—Jefferson Co. Bd. Educ., W. Jefferson St., Louisville, Zone 2, 2 story, reinforced brick, high school, $1,500,000. Plans deposit $25. Fred Harstern, Realty Bldg., Louisville, Zone 2, archt. E. R. Rorent & Assoc., 554 S. Third St., Louisville, Zone 2, engrs., CD 4/4, under Ky., Louisville.

Mass., Gloucester—HOUSING—B.A. 5/10—City of Gloucester Housing Auth., Gloucester, 90 units for veteran's housing. Approx. $400,000. Thomas Worcester, Inc., 84 State St., Boston, archt. and engr. CD 7/14.

N. Y., Lynbrook—SCHOOL—B.A. 5/10—Bd. Educ., Union Free School Dist. 20, Lynbrook High School, Union Ave., school addn. Municipal St. and Waverly Ave., $412,500. School addn., Clark Ave., between Sherman and Burtes Sts. $205,000 grade and high school alterations, Atlantic and Union Aves., $132,000. Frederick P. Wiedersum, 240 Rockaway Ave., Valley Stream, archt.

N. C., Greensboro—HEATING PLANT, etc.—B.A. 5/10—Agricultural & Technical College of North Carolina, F. D. Bluford, pres., Greensboro, central heating plant and steam distr. sys., Sect. 1, heating plant bldg., incl. preparation of site, coal storage yards, roads, landscaping. Sect. 8, pipe valves, fittings for installing steam, water and other piping. Sect. 9, plumbing and drainage sys. in heating eq. Pit Bldg. Sect. 10, electrical work in eq. Pit Bldg. Sect. 11, exterior elect. work. Sect. 12, exterior steam and hot sys. Plans deposit $35. Wm. C. Deen, 5 Exchange Pl., Raleigh, engr.

Alta., Ralston—DWELLINGS—B.A. 5/10—K. F. Hunt, engr., 405 Kensington Bldg., Winnipeg, Man., 76 dwellings, for Dept. Canada Mtge. & Hsg. Corp. $608,000. Plans deposit $10.

N. Y., New York—SCHOOL—B.A. 5/11—Sch. Bldgs. Design & Constr., 44 Fourteenth Ave., extend Brooklyn Zone 1, general steam, plumbing and sprinkler heating and ventilating work and electrical wiring fixtures for Junior High School 125, Pioneer Ave., Watson to Haviland Aves. Plans deposit $22, general $5, plumbing and drainage, $8, heating and ventilating $2, electrical work and lighting fixtures, CD 8/13/45.

Calif., Santa Rosa—MEMORIAL—B.A. 5/12—Sonoma Co. Courthouse, 1 story, 193 x 212 ft., reinforced steel, memorial bldg., incl. auditorium, dining hall, stage, etc. Approx. $250,000. Plans deposit $50. C. A. Caulkins, Jr. & Assocs., Rosenberg Bldg., Santa Rosa, archts. C. Jefferson Kay, 1538 Market St., San Francisco, engr. CD 2/1, under 1/4.

Conn., Hamden—SCHOOL—B.A. 5/12—Paul M. Fleming, chm. Bd. Educ., Hamden, 2 story, brick, school, Dunbar Hill Dist. $479,000. Plans deposit $100. Henry Kelly, Kelly, 282 York St., New Haven, archts. CD 10/24.

▲ Ont., Trenton—HOUSING—B.A. 5/12—A. A. E. Housing Group, Central Mortgage & Housing Corp., 345 Fleet St., W., Toronto, 231 houses, at R. C. A. F. Station, Tender D. N. D. (Specification No. 5750). Approx. $2,100,000. Plans deposit $10.

Calif., Riverside—SCHOOL—B.A. 5/15—City School Dist., 3950 12 St., reinforced brick, Emerson Junior High School, $400,000. Herkenhoff & Watkins, Mission Inn, Riverside, archts. CD 5/13.

Kan., Mission—SCHOOL—B.A. 5/15—Prairie School Dist. 46, c/o Harold C. Dent, president, Prairie Grade School, 67 and Mission Rd., R. F. D., Kansas City, Kan., supplementary school bldg., Tomahawk and Roe, $100,000. T. W. & Lawrence S. Rose, National Bank of Topeka Bldg., Topeka, archts. CD 3/28, under Kan., Olathe.

Calif., Eureka—HOSPITAL—B.A. 5/17—Humboldt Co. Courthouse, reinforced concrete hospital addn., incl. 12 bed wing Unit B, dining room, kitchen, cold room, etc. Approx. $250,000. Plans deposit $25. Edward Frederick Ainsley, 251 Post St., San Francisco, archt. CD 12/16/49.

† N. C., Winston-Salem—ARMORY—B.A. 5/17—U. S. Eng., Post Office Bldg., Savannah, Ga., WO, invitation, Serial No. Eng 09-133-50-50. CD 4/12.

Alaska, Petersburg—HIGH SCHOOL—B.A. 5/17—General Services Admin., Community Facilities Service, Juneau, 2 story, 115x164 ft., reinforced concrete, high school, Proj. 50-7-A20. $300,000. Plans deposit $25. Fink & Malcolm, Juneau, archts. CD 4/15/47.

Ont., Ottawa—GENERATING UNITS, etc.—B.A. 5/17—Acting Secy., Dept. P. Wks., Hunter Bldg., supply, installation steam generating units and accessory equip. at Central Heating Plant, Cliff St. Approx. $200,000. G. Brault, c/o owner, archt. CD 12/14.

Ill., Carlinville—HOSPITAL—B.A. 5/18—Carlinville Hospital Assn., Ira McCollum, pres., 826 E. Main St., 3 story, brick, concrete, steel, hospital. $820,000. Plans deposit $100. Conover Townsend & Assocs., 351 E. Ohio St., Chicago 11, Ill., engrs. and archts. CD 4/20/49.

Ont., Camp Borden—HOUSING—B.A. 5/11—J. D. McCarthy, secy., Canadian Commercial Corp., 70 Lyon St., Ottawa, 250 men barrack block. Tender No. 0-3-29-659. Approx. $760.00. Plans deposit $200.

KiFS

Bond Plaster Permanently to Concrete

KIFFED CEILINGS THROUGHOUT
in this 15 Story Apartment Building
1350 Astor Street, Chicago, Ill.
Architect...Ralph C. Harris...Chicago

● "We have just completed the pouring of concrete in the Astor Street Apartment Building. We are very happy with the results and believe that Kifs are superior to other methods of holding plaster to concrete ceilings."
Kollie-Forsaker Company
Chicago, Ill.

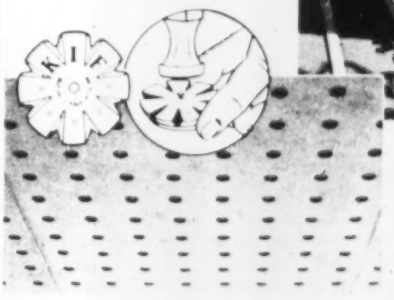

Kifs cut costs... nearly by half compared with metal lath construction; save time; save plaster (require only a rough and finished coat, total thickness ⅝"); save building height...four inches for every story; save capital investment. They meet all Federal specifications.

Kifs can be rented or purchased. For full information on this new, fast, lowest cost method of bonding plaster permanently to concrete, write us now.

BUFFALO PRODUCTS, *Inc.*
A subsidiary of Frontier Industries, Inc.
319 BABCOCK ST., BUFFALO 10, N. Y.

New Transits and Levels by Experts

Each Buff is dependable, accurate and economical.

Send for catalog #329.

Headquarters for Repairs

Every make of instrument, renewed by Skilled Workmen.

Our Shops are located at Jamaica Plain, Boston, Mass.

Buff & Buff Mfg. Company
HENRY A. BUFF, *President.*

McKIERNAN-TERRY
Wide-Range Line of
PILE HAMMERS *and* **EXTRACTORS**

Now made in complete, standardized line of 10 double-acting hammers, 5 single-acting hammers and 2 double-acting extractors.

Write for free descriptive Bulletins.

Also builders of coal and ore bridges, bulk material unloaders, bridge operating mechanisms, hoists and marine equipment, and specially designed machinery.

McKIERNAN-TERRY CORP.
13 Park Row, New York 7, N. Y.

Prompt Delivery on

STEEL BUILDINGS

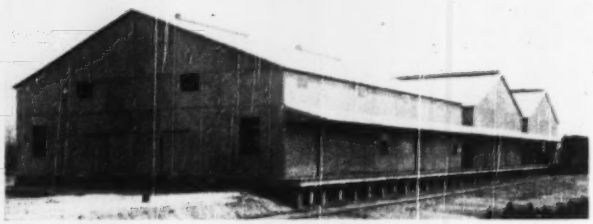

One of the many industrial steel buildings made by Allied Steel

• *Custom Built* • *Insulated if Desired*

- Structural Steel Fabrication
- Gratings
- Ladders
- Platforms
- Safety Cages
- Ventilators

Allied Steel is in a position at the present time to furnish *prompt delivery* on Steel Buildings, Structural Steel Fabrication and Steel Accessories.

Allied will completely engineer your special building requirements from analysis of your need to placing the last piece of steel.

Allied buildings can be furnished insulated; they are flexible, can be lengthened or shortened; afford nearly 100 percent salvage; are portable; have low initial investment and low cost maintenance; are fire resistant and weathertight.

ALLIED PRODUCTS STEEL

WRITE FOR ALLIED'S CATALOG

ALLIED STEEL PRODUCTS CORP

2112 North Lewis Ave. Tulsa, Oklahoma

"GUNITE" CONCRETE

(Since 1918)

FOR • STEEL PLATE LINING • STEEL ENCASEMENT • BUILDING NEW WALLS • LINING WATER RESERVOIRS, TUNNELS AND SEWERS • PLATE LINING OF STEEL STACKS, BUNKERS, DUCTS • REPAIR OF DISINTEGRATED CONCRETE AND MASONRY • CANAL, DITCH AND DRAIN LINING

GUNITE CONCRETE & CONST. CO.
1301 Woodswether Rd., Kansas City 6, Mo.

District Branch Offices

R. N. Turner, Dist. Mgr., 228 No. LaSalle St., Chicago 1, Ill.; B. H. Mueller, Dist. Mgr., 6625 Delmar Blvd., University City, (St. Louis), Mo.; Philip D. Barnard, Dist. Mgr., 2046 Addison, Houston 5, Tex.

Branch Offices: Denver, Dallas, New Orleans

See our catalog in Sweet's

Hayward Buckets

Use this Class "E" Clam Shell Bucket for handling crushed stone, gravel, sand and other bulk materials.

THE HAYWARD CO., 48-50 Church St., N. Y.

La., Lafayette—CHEMISTRY—H.A. & J. J. Labbe, Archts., Gayosso Bldg., Baton Rouge, 2 story, brick chemistry bldg., on campus of Southwestern Louisiana Institute, $700,000. Plans deposit $50, Smith & Prejean, Duchita National Bank Bldg., Monroe, archts. CD 4-22-48.

LOW BIDDERS

▲ Calif., Modesto—HIGH SCHOOL—Modesto Bd. Educ., 14 and 1 sts., Apr. 17, 2 story, reinforc. Thos. Downey High School, from Geo. Buck, Box 784, Stockton, $1,599,690 (irregularity in bids). CD 3-21.

▲ Calif., Porterville—INSTITUTION—State Div. Architecture, P. Wks. Bldg., Sacramento, Apr. 18, general contract, thirteen 1 story, 175,000 sq. ft. State Institution for Feeble-minded, Porterville, Calif., Box 1177, Stockton, $2,495,682. Heating and ventilating, from Frank Hudson, Inc., Fresno, $287,723. CD 3-16.

▲ Calif., Redwood City—HIGH SCHOOL—Sequoia Union High School Dist., Redwood City, Apr. 14, concrete block, wood frame, Atherton-Menlo Park High School, one 1 story, 1 story and 2 story bldgs., from Bd. of County Cls., 344 Hamlet St., San Francisco, $1,475,000. CD 3-14.

▲ Ill., Urbana—ANIMAL SCIENCE—University of Ill., Urbana, 4 story, 2 story, concrete, brick and stone, 1 story, brick, Summer St., 11 sts., bet. N. Michigan Av., Chicago, Zone 1, $1,062,500. Naess & Murphy, 20 S. Jackson St., Chicago, Zone 4, archts. CD 4-21-48.

▲† N. M., Los Alamos—HOSPITAL—U.S. Atomic Energy Comm., Los Alamos, Apr. 21, 2 story, 50 bed, general hospital, medical and surgical facilities, from Robert E. Fickes, Santa Fe, $2,261,000. CD 4-13-48.

N. Y., Whitestone—SCHOOL—Supt. Schools Bldgs., Dept. A, Contr. 19 Flatbush Ave. Extension, Brooklyn, Zone 1, Apr. 19, general contract, plumbing and drainage, heating and ventilating, electrical work and lighting fixtures, for P. S. 193, 21 Rd. between 16 and 166 Sts., from Rudy & Kleinman, Inc., 1009 Lexington Ave., New York, Zone 17, $943,000. CD 4-6-48.

Pa., Elizabethtown—HOSPITAL—Veterans' State Auth., 18 and Herr Sts., Harrisburg, Apr. 19, general contract, 2 wings to be added to main hospital building, at State Hospital for Crippled Children, from Boyd H. Hursh, Berwick Rd., Berwick, $341,043. CD 4-7-48.

▲ Pa., Hollidaysburg—ADMISSION—Veterans' State Auth., 18 and Herr Sts., Harrisburg, Apr. 19, general contract, one story, at Hollidaysburg State Hospital, from Wm. MacLeay & Son, 1420 W. Thompson St., Phila., Zone 22, $1,449,000. CD 3-24.

S. D., Yankton—HOSPITAL—State Bd. Charities & Corrections, Pierre, recommends plans filed at Yankton State Hospital, from Francis R. Durkee, Evergreen, $253,329. Bids 4-13. CD 3-22.

▲ Tenn., Nashville—HEALTH and PHYSICAL EDUC.—State Dept. Educ., Nashville, Apr. 20, health and physical educ. bldg. at Agricultural & Industrial State College, Box 310, Nashville, Tenn., 217,113 sq. ft., $1,084,022. Est. $800,000. CD 3-31.

Wash., Kennewick—HIGH SCH.—Kennewick School Dist. 17, 4 sts. & Apr. 135, general contract, 113x110 ft. and 144x125 ft. reinforc. high school, from P. W. Gaydeski, 5858 Ste. Cit., Vancouver, $858,000. CD 3-27.

▲ B. C., Trail—SCHOOL—Trail Dist. 11, 11th Ave. & Ash., Apr. 19, senior high school, two 2 story, reinforc. concrete, brick and steel, 1 story, brick, auditorium, gymnasium, cafeteria, kitchen, boiler house, 2 drafting rooms and 3 special classrooms, from Mikasen Const. Co., Ltd., 410 Seymour St., Vancouver, $1,154,425. Est. $1,000,000. CD 3-16.

CONTRACTS AWARDED

▲ Calif., Chino—RECEPTION CENTER—State Div. Architecture, P. Wks. Bldg., Sacramento, general contract 1, 2 and 3 story, 147,000 sq. ft. reception center at Chino State Prison, to Del E. Webb, 155 San Fernando Rd., W., Los Angeles, $1,735,700. Bids 3-15. CD 3-8, under 3-15.

▲ Calif., Redwood City—HOSPITAL—Sequoia Union High School Dist., Redwood City, Apr. 14, 2 story, 100 bed reinforc. concrete, brick and steel, 1 story, brick, tuberculosis annex, at Howard J. White Memorial Hospital, from Mitchell & Mahoney, 344 Harriet St., San Francisco, $1,331,550. Bids 4-14. CD 4-19-48.

▲ Kan., Great Bend—SCHOOL—Bd. Educ., general contract, 1 and 2 story, brick, Lincoln & Emerson Schools, from Howard A. Kramer Const. Co., Inc., 1020 Broadway, Great Bend, $1,148,878. Bids 4-13. CD 4-19-48.

▲ N. Y., Astoria—HOUSING—New York City Housing Auth., 64 Park Row, New York, Zone 17, general contract, 32 bldgs., Section II, Astoria Houses, 11 sts. & 31 Ave., Long Island City, $3,639,000. Bids 3-14. CD 3-16, under 4-8.

COMMERCIAL BUILDINGS

BIDS ASKED

O., Tiffin—GYMNASIUM—Heidelberg College, Tiffin, Ohio, Architectural Commission, 1 story, reinforc. concrete, brick and steel, 100x150 ft., seating 3,500, from Carl A. Strauss, Tiffin, Ohio. CD 4-14-48.

LOW BIDDERS

Wis., Ripon—RECREATION HALL—Ripon College, Ripon, Wis., Pres. Wm. C. Lindsay, Jr., Ripon, Wis., 1 story, brick, Scholz, $353,000.

(Continued on page 86)

YOU WANT A TOP QUALITY MIX AT THE VERY LOWEST COST

...Right!

3 MODELS TO CHOOSE FROM

SEAMAN SELF-PROPELLED MIXER

Close-coupled, short turning radius. Standard dual transmission gives 7 forward mixing speeds plus road gear and reverse. Wide visibility. All controls in instant reach. 7 ft. mixing width.



SEAMAN SELF-PROPELLED TRAV-L-PLANT

All Self-Propelled advantages plus spray bar, pump, pump tachometer and tachometer wheel for accurate, no-migrating no-evaporating admixture of bitumen or water placed most efficiently just ahead of rotor.



SEAMAN PULL-TYPE MIXER

Here selective speed transmission controls rotor speed instead of forward travel to obtain highest mixing efficiency despite variables in speeds of towing tractors.



THE NEW SEAMAN MIXER GIVES YOU BOTH

Core samples of SEAMAN-mixed pavements have been tested many times by impartial laboratories. Result: equal in quality to the work of central hot or cold mix plants.

That's because all NEW SEAMAN MIXERS are adjustable in either forward travel or in rotor speed to match exactly every type of soil and aggregate so that the most perfect blending of coarse and fines, the most efficient keying of aggregates and the most uniform distribution of binder is accomplished.

Now—consider cost. Road mixing is acknowledged to be the most economical method. But the SEAMAN does the job at less cost than with any other known equipment. There are good reasons: the remarkably low investment, low operating and maintenance cost, and extraordinarily high hourly output of perfectly blended and mixed materials.



SEND FOR THIS COST ANALYSIS

We'll be glad to send you a very interesting and comprehensive report on operating and maintenance costs of the SEAMAN MIXER. It tells the story at a glance. Just write for the "SEAMAN COST ANALYSIS."

—And forever after—do your mixing with a SEAMAN!

For "SEAMAN COST ANALYSIS" write to

SEAMAN MOTORS, INC.

281 No. 25th St., Milwaukee 3, Wisconsin

DIG REAL DIVIDENDS!

WELLMAN
Williams Type
Welded Buckets

Operators prefer the Wellman Bucket for its balance, easy handling, and digging power. Owners prefer the Wellman Bucket for its bigger payloads, lower maintenance cost. These features are not accidental. Wellman pioneered in welded construction of rolled steels which make these buckets lighter, stronger, for greater yardage at lower costs. In all types and sizes, you'll do better with a Wellman!

There's a Wellman Bucket for every service



THE WELLMAN ENGINEERING COMPANY
7000 CENTRAL AVENUE CLEVELAND 4, OHIO

Continued from page 84

Wis., Waunau CHURCH etc—St. Anne's Catholic Congregation, Apr. 12, general contract, 1 story, 56x130 ft., church and 1 story, bsmt., 76x260 ft. school from Hoffman Constr. Co., Appleton, $281,000. CD 3/29.

CONTRACTS AWARDED

Md., Dundalk RESIDENCES—Dundalk Bldg. Co., 900 Court Square Bldg., Baltimore, two hundred-eighteen 16x28x32 ft. concrete brick residences, Dundalk Village, Duncan Rd., Browning Rd. and Mashane Way, separate contracts, $981,000.

▲ N. J., Ewing Twp. (Trenton P. O.)—HOMES—Five-site Homes, Inc., Raymond Brokland, pres., 845 Parkview Ave., Trenton, 143 homes, owner builds, $2,283,000. Sullivan Jones Co., Chanin Bldg., New York, N. Y., archt. and Trenton Eng. Co., 143 E. State St., Trenton, engr.

▲ N. Y., Hempstead APARTMENT—Fort Army, Governors Island, construct, manage and finance 600 family garden apartment proj., on Merrick Rd. on 32 acre site at Mitchell Field, to Cropsey Constr. Corp., Alexander Muss, prop., 265 Grand St., New York, Zone 2, $5,000,000. Sponsor builds. Oscar I. Silverstone, 155 Pierrepont St., Brooklyn, Zone 2, archt.

R. I., Warwick CHURCH etc—St. Mark's Episcopal Parish, to A. R. Parmley Arch. Design, 101 Reneve St., Providence, 1 story, bsmt., 30x60 ft. and 40x80 ft. stone cinder block church-parish house, W. Shore Rd., to Delsa Constr. Co., Inc., 346 Hope St., Bristol. Approx. $250,000. CD 1-10.

INDUSTRIAL BUILDINGS

BIDS ASKED

O., Toledo FREIGHT TERMINAL—B.A. About 5/15—Ira Davis, c/o Ira Davis Co., 1510 Ford Bldg., construction and motor freight terminal, steel bowstring bldgs., each offering single or dual occupancy with warehouse and facilities for both motor freight and rail users, 4100 Lagrange St., $350,000.

Md., Sparrows Point WAREHOUSE—Rheem Mfg. Co., North Point Rd., room and overhead steel, concrete, concrete block, approx. 240,000 sq. ft. warehouse and bldg., 4 units.

Ont., Toronto FACTORY—W. A. Armstrong, Bolton, 19th Memorial Ave., one story, reinforced, 1 story, 140 x 210 ft., 2 story, 70 x 210 ft., 2 story, 70 x 210 ft., 2 story, 70

A NEW STANDARD* FLAT SLAB CONSTRUCTION!

SMOOTH CEILINGS SYSTEM

* Completely simplifies design and construction methods. Permits greater flexability and provides many cost cutting advantages.

SPECIAL
STEEL
GRILLAGES

. . . eliminates usual flared column cups, drop panels or beams. They can be used with Structural steel, steel pipe of Reinforced concrete columns.

FREE
BULLETINS DESCRIBE MANY ADVANTAGES OF SMOOTH CEILINGS SYSTEM

- **LESS CONCRETE FORM WORK** . . . reduces lumber costs and form building time.
- **EASY EQUIPMENT INSTALLATION** . . . on flat obstruction free ceilings.
- **LOWER FINISHING COSTS** . . . on a flat smooth surface.

WRITE FOR YOUR COPIES!

SMOOTH CEILINGS SYSTEM
802 Metropolitan Life Bldg., Minneapolis 1, Minn.

NON-STOP PROFITS

PUT A *SANSTORM* ON THE JOB

Your sandblasting headaches end **WHEN SANSTORM GOES ON YOUR CONSTRUCTION JOB!** Fast and easy, your Sanstorm Sandblast Machine will clean every kind of steel fabrication, concrete, brick, stucco and equipment. You'll say it's the greatest money-saving piece of machinery on your job.

CHECK THESE FEATURES

✓ **JOB EFFICIENCY.** No wonder Sanstorm is the leader because no matter what abrasive you use, it won't plug.

✓ **JOB ECONOMY.** Simply designed, Sanstorm machines are built for rugged working conditions, yet always maintain a constant, precision flow.

✓ **SIZES FOR EVERY BLAST CLEANING NEED.** Sanstorm Sandblasting machines are available in stationary or portable models. Simply operated, too, for real labor savings.

Dealers in all principal cities.
For further information write or wire.

Charles Q. Spears,
SANSTORM MANUFACTURING CO.
Santa Clara and H Streets Fresno, California

PROPOSED PROJECTS

WATER SUPPLY

Ark., Paragould—City, Imprv. City's water and sewerage syst., $425,000. CE ▲ Jan. 5

Calif., South Pasadena—City, Impr. $350,000. Hoover, Cox & Wilson, Los Angeles, Engr.

Ida., Tamm—City, Wtr. Wks. Impr. $122,000.

N. C., Goldsboro—City, Impr. Water Plant Ext., $729,000.

Okla., Cherokee—City, Water Wks. Impr., $194,200. A. Nelson & Co., Kansas City, Mo., Engr.

Ore., Metolius—City, Water Wks. Impr., $100,000.

▲ Tenn., Clarksville—City, Water Wks. Impr., $1,200,000.

B. C., Prince George—City, City Hall, $150,000.

▲ Que., Quebec City—Province of Quebec, Quebec, Impr. Main Water Supply, $1,000,000.

SEWERS, WASTE DISPOSAL

Ark., Eudora—City, J. T. Bennett, Engr., Eudora, Sewerage Sys. and Disposal Plant, $231,000. A. G. Rhodes, Jr., National Bldg., Pine Bluff, Engr.

SPEAKING OF CONCEALED SAWS

As an added safety feature, all Model "J"

JOHNSON METAL BAND SAWS

come equipped with a BLADE GUARD located between the Left Frame and Guides. It covers the exposed cutting portion of the blade as a means of protection. Readily removed to change blade. Cuts 10" rounds, 18" flats. Also Model B, lighter, portable. Cuts 5" rounds, 10" flats.

Write for Catalog

JOHNSON MANUFACTURING CORP.
Albion, Michigan

DRILLING CONTRACTORS

DIAMOND AND SHOT CORE BORINGS—DRY SAMPLE BORINGS

Foundation Testing for Bridges, Dams and All Heavy Structures

Also

Manufacturers of Diamond and Shot Core Drills, Accessories and Equipment

SPRAGUE & HENWOOD, Inc.
Scranton, Pa. Dept. E, U. S. A.

DREDGES

HYDRAULIC
● DIPPER ●
CLAMSHELL

Bolted sectional steel hulls for landlocked, inland waters
If you need a dredge, write us!

AMERICAN STEEL DREDGE CO. INC.
FORT WAYNE 1 · INDIANA · U.S.A.

DESIGNERS AND BUILDERS OF DREDGING EQUIPMENT SINCE 1905

Ark., Pocahontas—City, A. L. Wright, mayor, sanitary sewer extens., addns. to primary treatment plant, Ark. S.P. 1010. $227,702. Marion L. Crisp & Assocs., consulting engrs., Little Rock, consult. engrs.

Calif., Menlo Park—Menlo Park Sanitary Dist., Menlo Park, voted $460,000 bonds sewage disposal plant. CD 2-21.

Conn., Deep River—Town Bd. Selectmen, Town Hall, sewerage sys., incl. sewer mains, disposal facilities, $150,000.

Conn., Hartford—Metropolitan Dist. Comm., P. Wes. Dpt., Bd. Contract & Supply, 111 Broad St., sanitary sewer, Albany Ave., to housing projects, $100,000. H. Wirtz, sewer engr.

▲ Ill., East St. Louis—City, John T. Connors, mayor, City Hall, Main and Missouri Aves., voted $2,500,000 bonds, relief storm and sanitary sewers in various locations. Horner & Shifrin, Shell Bldg., 1221 Locust St., St. Louis 3, Mo., engrs. CD 4-20.

Mass., Webster—Town, Sewer Bldg. Comm., sewage disposal plant, treatment facilities, $350,000. Hayden, Harding & Buchanan, 626 Park Square Bldg., Boston, consult. engrs.

Mo., Farmington—City, City Hall, sewerage sys. improvs., incl. enlargement, reactivation sewage treatment plant, etc., $250,000. C. A. Hawkins, Finance Bldg., Kansas City, Mo., consult. engr. CD 2-14.

▲ Mo., University City (St. Louis P. O.)—City, Thomas F. Mayer, mgr., City Hall, 6801 Delmar Blvd., storm water sewers in Old River Des Peres water shed, $2,400,000. Horner & Shifrin, Shell Bldg., 1221 Locust St., St. Louis, Zone 3, engrs. CD 2-7.

▲ O., Cincinnati—City, City Hall, 9 and Plum Sts., incinerator, appurtenances, paving approaches, grading, sewer, etc., $1,875,000. Ohio Supreme Court declared bonds voted November 1949 illegal because proceedings for submission of these bonds began before the Ohio State Legislature reduced requirement from 65% to 55% majority. CD 12-27-49.

Okla., Bethany—City, S. P. Dawson, mayor, Bethany, storm sewers, incl. sewer mains, and line to existing disposal plant on N. Canadian River, $125,259. Hudgins, Thompson, Ball & Assocs., 1100½ W. Main St., Oklahoma City, consult. engrs.

Okla., Laxton—City, R. D. Glenn, mayor, Laxton, enlarge sewage treatment plant, $617,000. Wyatt B. Hendrick, 216 Koehler Bldg., consult. engr.

S. C., Union—City, bond election June 6, sanitary sewer improvs., $558,000.

Tenn., Springfield—City, sanitary sewer improvs., $580,000.

Tex., Lamarque—Galveston Co. Water Control & Improvt. Dist. No. 12, Lamarque, sewage treatment plant, $211,000. Joe J. Kidy, 811 American Exchg. Bldg., Fort Worth, consult. engr. CD 2-14-48.

Tex., San Antonio—Browning, Jr., Insurance Bldg., sanitary sewers, $60,000; storm sewers and drainage, $50,000. H. W. Woodhouse, Hemisfair Plaza, engr.

Wash., Raymond—City, City Hall, treatment plant and intercepting sewer, $256,000. R. H. Corey, Cornett Bldg., Portland, Ore., consult. engr.; F. E. Clark, city engr.

BRIDGES

Wash., Bellingham—Whatcom Co., County Courthouse, replace washed out bridge across middle fork of Nooksack River, Maple Falls Rd. & to culvert, $50,000; approaches, $75,000. R. [illegible] engr.

Alta., Edmonton—Municipality, over Saskatchewan River near center of city, $100,000. J. D. A. MacDonald, city engr.

Alta., Edmonton—Municipality, subway under the Canadian National Railway, $150,000. J. D. A. MacDonald, city engr.

STREETS AND ROADS

Ill., Cornell—Amity Twp. Road Dist., Cornell, voted $100,000 bonds, [illegible]

▲ La., Bastrop—City, Geo. H. Goodwin, mayor, street improvs., incl. paving, curb and gutter, drainage, etc., $1,066,850. Bethel & Nelson, 940 Union St., New Orleans, consult. engrs.

La., Houma—City, C. D. Lapeyrouse, mayor, sidewalks and storm sewers, $513,000. S. A. Arnez, Mouton Bldg., Lafayette, consult. engr.

N. Y., New York—Dept. of New York Auth., 111 8 Ave., improvs. to 21st St. connection between George Washington Bridge and West Side Parkway, $9,000,000.

N. C., Goldsboro—City, voted bonds, 79 blocks street paving, $150,000. CD 4-6.

▲ Penna., Pittsburgh—City Dept. Highways, locate and open 22nd St. Extension from Penn Ave. to Liberty Ave., involving acquisition of 4 railroad to Canton, running under Penn Ave. and Liberty Ave., and improv. bridges over Allegheny River, Approx. $12,000,000. Clement Engineering & Carpenter Inc., [illegible] engrs.

▲ Tenn., Nashville—City, City Hall, and State of Tennessee, Nashville, Capitol Blvd. and other approaches to proposed Bridge of State Capitol area, $5,000,000. $8,000,000. Clarke, Rapuano & Holleran, 145 E. 32 St., New York, N. Y., consult. engrs. CD 2-16.

Tex., Colorado City—City, voted bonds, 100 blocks asphalt street paving, water and sewer system, $100,000.

Va., Richmond—City, re-let, Broad St. between Lombardy and Twenty-fifth Sts., [illegible] storm sewer pipe, and paving new street, lighting and traffic lights, $78,000. Jack Pole, Wes. [illegible]

B. C., Prince George—City, City Hall, hard surf. streets and sidewalks in downtown area, $100,000.

AIRPORTS

Tex., Amarillo—TERMINAL—City, plans by Emmett F. & James F. Rittenberry, 1000 Fisk Bldg., terminal or administration, $400,000. CD 2-8.

▲ Tex., Dallas—RADAR STATION—U. S. Dept. Air Corps, Pentagon Bldg., Wash. 25, D. C., radar station, 225,000.

Tex., Snyder—AIRPORT—Scurry Co., Snyder, airport, $300,000. Ayer-Wimpee-Long Co., Odessa, consult. engrs. CD 4-10.

LATIN AMERICA

Ecuador, Quito—Republic of Ecuador, Quito, plans plant to produce newsprint, wrapping and writing paper, $1,780,000.

El Salvador, San Salvador—Republic of El Salvador, San Salvador, plans broadcasting station, combination 1 kw. AM/FM long wave, 5,000 watt short wave, $260,000.

Mexico, Ciudad del Carmen—Cia. Comercial de Campeche, S. A., Calle 22 No. 107, Ciudad del Carmen, Campeche, plans animal and vegetable products refrigeration plant, $200,000.

Mexico, Ciudad del Carmen—Congeladora Mexicana, S.A., Calle 20 N. 10, Ciudad del Carmen, Campeche, plans animal and vegetable products refrigeration plant, $200,000.

Mexico, Ciudad del Carmen—Mariscos de Carmen, S. A., c/o Francisco Vasquez Cerrica, rep., Motolinia 20-608, Mexico, D.F., plans animal and vegetable products refrigeration plant, $200,000.

Mexico, Guadalajara—Jose Gonzalez Herrero, Reforma 1500, Guadalajara, plans 250 room hotel, $1,500,000.

Panama, Panama City—Industrias Pesqueras Panamenas, S.A., Panama City, plans freezing plant, cold storage, fish and meal canners, $300,000.

Trinidad, Port of Spain—Govt. of Trinidad, Port of Spain, plans water supply, $20,000,000. Colonial Development Bd., London, England, engr.

PUBLIC BUILDINGS

Calif., Monrovia—CITY HALL, etc.—City Council, defeated $487,000 bonds, city hall, library, police station, fire station. William Ainley, 949 E. Wilshire Ave., Inglewood, CD 3-10.

Calif., Montebello—CITY HALL—City, voted $400,000 bonds. John L. Cole, city engr. Correction.

▲ Conn., Hartford—[illegible] Housing Authority, Bd. Commrs., plans by Kane & Flynn and 49 Pearl St. for 500 family units, Kensington and Hampton Sts., $5,700,000. CD 4-13.

▲ Ill., Peoria—HIGH SCHOOL—Community High School Dist. No. 150, Peoria, plans high school in Hollywood Heights addn., Peoria, Ill., to replace present Peoria High School, Peoria, Ill., [illegible] $1,049,000.

▲ Ill., Springfield—[illegible] Springfield Housing Authority, Springfield, Ill., plans 4 projects, Abbott Alley, 1st addn., Lincoln Park, 2nd addn., Lincoln Park, garden apartments, $1,600,000. CD 4-13.

Mass., Cambridge—[illegible] Cambridge Housing Authority, 11th Mass. Ave., plans by Anthony J. Edwards, 126 Mass. Ave., Boston, 3 story tenant Veterans Housing, Approx. $525,000. CD 1-26.

Mass., Clinton—[illegible] Town of Clinton Housing Authority, Clinton, Mass., plans by Worcester Housing Authority, Worcester, Mass., and State Housing Board, Boston, garden type apartments, $950,000.

▲ Mass., Worcester—[illegible] City of Worcester Housing Authority, plans by Samuel Glazier Assoc., 105 Newbury St., Boston, 620 unit 3 story tenant houses, Great Brook Valley Development, Approx. $5,000,000.

N. Y., Brooklyn—GRAIN TERMINAL—New York Port Auth., Bush Terminal Bldg., 130 Bway., New York, Zone 11, rehabilitation of Port Authority Grain Terminal, Columbia St., Pier, $554,600.

O., Avon Lake—SCHOOLS—Bd. Educ., 32770 Lake Rd., plans by Kirk, Kirkey & Delamotte, 6014 Euclid Ave., Cleveland, 3 story brick school, clay and [illegible] walls, $325,000. Also, East Bonner Rd., steel Lake Erie Drive and Electric Rd., $325,000.

O., Granville—SCHOOLS—Granville School Dist., Granville, [illegible] and elementary bldg., $465,000. Maugans & Summers, Columbus, consult. engrs. CD 4-24-46.

O., Huron—SCHOOL—Bd. Educ., Huron, plans by Harold Plumb, A.I.A., Sandusky, school, $430,000. CD [illegible]

O., Royalton—HIGH SCHOOL—Bd. Educ., Royalton, plans by Kirk, Kirkey & Delamotte, 6014 Euclid Ave., Cleveland, 2 story brick, 40x220 ft., brick veneer, steel joist, Ridge Rd., near Royalton Rd., $425,000. Lev. E. Mumma, 6014 Euclid Ave., Cleveland, consult. engr. CD 11-21.

O., South Euclid and Lyndhurst—SCHOOLS—Bd. Educ., South Euclid and Lyndhurst, Mayfield and Evanston Rds., Lyndhurst, [illegible] May 3. Mayer, Ellenberger & Wolf, Cleveland, and Professor Rd., $400,000. 2 story brick block steel Beaux High School addn., Mayfield and Evanston Rds., $450,000. Charles Bacon Rowley & Assocs., 200 Keith Bldg., Cleveland, archts.

ON GUARD . . . ALWAYS!

Control . . . of paramount importance in chlorine gas feeding . . . is a major feature of *Builders Chlorinizers*. With their unique diaphragm control valves, these feeders keep chlorine gas flowing evenly, accurately. Automatic compensation is built in . . . temperature and pressure changes have no effect on the accuracy of chlorine delivery. Here's the valve that brings true watchdog dependability to the chlorination of water and sewage.

For extra safety, the Chlorinizer control valve incorporates a powerful coiled spring, poised, ready to cut the chlorine flow if any condition occurs to interfere with safe operation. Learn more about the many advantages of Builders Chlorinizers for manual, semi-automatic program, or flow-proportional chlorination. For Bulletins and engineering information, address Builders-Providence, Inc. (Division of Builders Iron Foundry), 390 Harris Ave., Prov. 1, R. I.

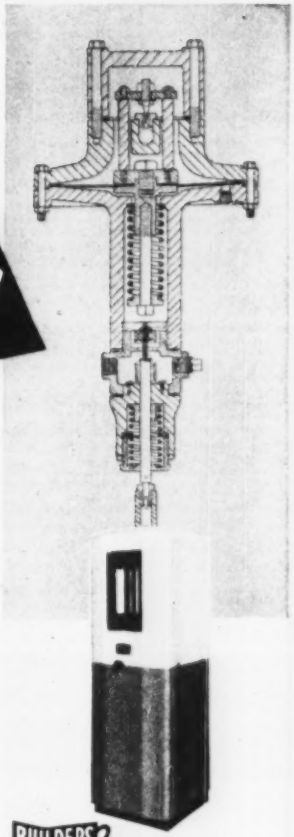

BUILDERS Chlorinizers

The chlorine gas feeders with extra features

BUILDERS PRODUCTS

The Venturi Meter • Propelofla and Orifice Meters • Kennison Nozzles • Venturi Filter Controllers and Gauges • Conveyaflo Meters • Type M and Flo-Watch Instruments • Wheeler Filter Bottoms • Master Controllers • Chlorinizers — Chlorine Gas Feeders • Filter Operating Tables • Manometers • Chronoflo Telemeters

130 YEARS 1870 BUILDERS 1950 BUILDERS IRON FOUNDRY

BUILDERS PROVIDENCE *Instruments*

"Gunite" . . . . . the sand-cement product of the "CEMENT GUN," for Concrete and Masonry Repairs, Pre-Stressed Tanks, Steel Encasement and for lining Reservoirs, Sewers and Tunnels.

CEMENT GUN COMPANY

"GUNITE" CONTRACTORS

GENERAL OFFICES—ALLENTOWN, PENNA., U.S.A.

MANUFACTURERS OF THE "CEMENT GUN"

Ave. between 190 and 191 Sts., $150,000; and other at 19 Ave. between 191 and 192 Sts. $150,000.

▲ N. Y., Brooklyn—APARTMENT—Fundamental Building Corp., 215 Montague St., Zone 2, plans by Sullivan W. Jones Assoc., 110 E. 42 St., New York, Zone 17, 2 six story apartments, 367-93 and 386-94 Avenue S. $1,220,000.

N. Y., New York—APARTMENT—Ellwood Gardens, 3 Park Row, plans by Gustave W. Iser, 104 E. 29 St., Zone 16, 6 story apartment, 31-37 Nagle Ave. and 14 Bogardus Pl. $750,000.

N. Y., Whitestone—APARTMENTS—Soundview Building Corp., c/o Schulman & Sobeloff, 14 Court Square, Brooklyn, Zone 2, 2 story apartment, Parsons Blvd. between 20 and 21 Aves., $360,000; 2 story apartment, 20 Ave. and 14th St., $224,000.

▲ O., Cleveland—HOSPITAL—Euclid-Glenville Hospital Bldg. Assn., c/o Jerome V. Sauser, 21611 Euclid St., Euclid, 6 story brick, block steel Euclid-Glenville Hospital, E. 185 St. and Lake Erie, $3,000,000.

Pa., Mt. Lebanon—APARTMENT—Lebanon Vue Apartments, Inc., 666 Washington Rd., Mt. Lebanon, Pittsburgh, Zone 16, plans by Phillip Friedman, 121 S. Negley Ave., Pittsburgh, 6 story bonnet, 86 x 178 ft. apartment, 420 Cochran Rd. $750,000.

Tex., Dallas—DWELLINGS—J. S. Fonville, 8378 San Fernando St., J. V. Beauchamp, Easton Rd., K. J. Development Co., Inc., Box 4243, Station A, and J. R. Starnett, 4105 Buckner Blvd., 117 frame dwellings, Easton Rd. area, $475,000.

▲ Tex., Dallas—STORES—Safeway Stores, Inc., 4927 Berman St., masonry retail stores, refrigerated unit, Store 1, $250,000; Store 2, $275,000; Store 3, $300,000; Store 4, $250,000; Store 5, $275,000; Store 6, $265,000.

Tex., Fort Worth—DUPLEXES—Berryhill Apartments, Inc., c/o Charles Haws, 915 a Throckmorton St., plans by John W. Fisher, 718 American Exchange Bldg., forty 25x27 ft. frame duplexes, $487,500. Carter & Burgess, 401 Century Bldg., consult. engrs.

Tex., Houston—RESIDENCES—E. S. Norman Building Corp., 4615 B Bonner Rd., residential proj., 75 acre tract, $500,000.

▲ Tex., Houston—COMMERCIAL—A. E. Dixon Bldg., 2541 Texas St., 8,000 sq. ft. masonry commercial bldg. $600,000; 14,000 sq. ft. masonry Commercial Bldg., $400,000, both on Portsmouth St. in Shepherd-Greenbriar zone.

▲ Utah, Salt Lake City—HOUSING—Mercer Bldg., owner for A. Knight Realty Co., c/o Knight Realty Co., Newhouse Bldg., plans by Arthur E. Lithgow, 79 E. Main St., housing proj., $1,234,000.

▲ Va., Arlington—DEPARTMENT STORE—The Hecht Co., F and 8 Sts. N. W., Wash., D. C., 250,000 sq. ft. department store, Glebe Rd. and Wilson Blvd., parking facilities for 2,000 cars, $6,000,000, incl. land and equip.

Wash., Moses Lake—HOUSING—R. Fairbanks & Earle Amick, Moses Lake, plans by J. Warren, 1303 E. 63 St., Seattle, Zone 5, 100 houses, $900,000.

Wis., Milwaukee—APARTMENT—L. Radin, 4931 W. State St., Zone 8, will construct 8 story apartment, $750,000—$1,000,000. Project cancelled. CD 4-28.

B. C., Victoria—OFFICES—British Columbia Electric Co., Ltd., structure to consolidate administration offices at central location, $500,000.

▲ Ont., Ottawa—HOUSES—Gabar Realty Co., c/o A. J. Axelrod, 85 Main St., Hull, 100 houses on south side of Carling Ave., Acosta, $1,000,000.

Que., Ville St. Michel (Postal District Montreal)—DWELLINGS—Jack L. Cummings, c/o City Councillor, J. C. Avie-m, City Hall, 52 dwellings, $400,000.

INDUSTRIAL BUILDINGS

Ia., Bondurant—GRAIN ELEVATOR—Farmers' Elevator Co., Bondurant, grain elevator, $326,000.

Ky., Louisville—PLANT—National Carbide Co., Bells Lane, dust retaining plant, $500,000.

Pa., Phila.—WAREHOUSE—B. F. Goodrich Co., 400 S. Main St., Akron, warehouse and office, $400,000. Lyle Miller, c/o owner, engr.

Pa., Pittsburgh—WAREHOUSE—South Side Transfer & Storage Co., S. 7 St. & S., plans by Charles Roberts, 5941 Center Ave., 1 story, 150x300 ft. brick, steel warehouse, 2B and A.V. R.R. $350,000.

Tex., Orange—WAREHOUSE—Orange Co., dusting resisting concrete warehouses, $750,000.

▲ Tex., Rusk—PLANT—Valencia Iron & Chemical Corp., Fox Airport expansion improv., $1,250,000.

▲ Philippine Islands, Manila—PLANT—Philippine Chemical Corp., Manila, plant constr., superphosphate, $3,000,000.

UNCLASSIFIED

Ariz., Phoenix—AERIAL TRAMWAY, etc.—Charles H. Alderson & Assoc., 521 W. Clarendon Rd., aerial tramway to top of Camelback mountain and 2 giant type and recreational sites at base and foot of lift, $700,000.

Arkansas—GAS DISTRIBUTION SYSTEM—Arkansas Western Gas Co., Fayetteville, gas distr. sys. in Lincoln and transmission line from Prairie Grove to Lincoln, $100,000.

Calif., Montebello—TRAFFIC SIGNALS, etc.—City Council, overlaid bonds, traffic signals, $50,000; stadium, $175,000. John L. Cole, city engr. (Correction-status) CD 2-17.

Georgia—RURAL DISTRIBUTION LINE, etc.—Lamar Electric Membership Corp., Barnesville, 100 mi. rural distr. lines and sys. improv., Lamar Co. $145,000.

Iowa—RURAL DISTRIBUTION LINES—Plymouth Electric Co-operative Assn., LeMars, rural distr. lines, sys. improv., Plymouth Co. $223,000. Brown Eng. Co., 322 K. P. Bldg., Des Moines, engr. CD 8-23-48.

Oregon—FISH HATCHERY—State Fish Comm., Governor Bldg., Portland, fish hatchery on Sandy River near Sandy, Multnomah Co. $240,000. Arnie J. Soumela, c/o owner, engr.

Tenn., South Fulton—GAS SYSTEM—City, natural gas sys. $240,000.

▲ Texas and New York—RADIO COMMUNICATION SYSTEM—Transcontinental Gas Pipe Line Corp., Oil and Gas Bldg., Houston, radio communication sys. from Mercedes, Tex. to New York, due to 1,840 mi. pipeline between Texas and New York, $2,000,000. CD 2-12.

Texas—RURAL DISTRIBUTION LINES—Midwest Electric Co-operative, Roby, 138 mi. rural distr. lines, 20 mi. tie lines, sys. improv., Fisher Co. $293,000. CD 9-11-46.

Tex., Alice—COLISEUM—Jim Wells County Live Stock Show Fair Dist., Courthouse, voted bonds, livestock coliseum and exhibit units, $300,000. CD 3/29.

▲ Tex., Orange—PORT REHABILITATION, etc.—City, port rehabilitation, $750,000; new wharves, $500,000. CD 4-20-48.

Tex., Tyler—TELEPHONE SERVICE LINE—Southwestern Bell Telephone Co., Tyler, telephone service line extension and improv., $343,000.

Vermont—RURAL DISTRIBUTION LINES—Washington Electric Co-operative, Barre, 68 mi. rural distr. lines and sys. improv., Washington Co. $187,000.

Wash., Tacoma—DRIVE-IN THEATRE—L. L. Newman, Northern Life Tower, Seattle, Zone 1, drive-in theatre on Pacific Highway, River Rd., $400,000.

Alta., Edmonton—OVERHEAD WIRING—Municipality, overhead wiring in industrial and commercial area, $100,000. J. D. A. Macdonald, City Hall, city engr.

Ont., Alexandria—ARENA—Municipality, arena, curling rink, swimming pool, etc. $100,000.

Ont., Ottawa—TELEVISION BUILDING, etc.—Canadian Broadcasting Corp., 1214 St. Catherine St. W., Montreal, TV television bldg. and transmitter station, $650,000.

Que., Three Rivers—CIVIL RESERVES—St. Lawrence Paper Mills Ltd., [illegible] Bldg., Montreal, 40x120 ft. [illegible], $125,000.

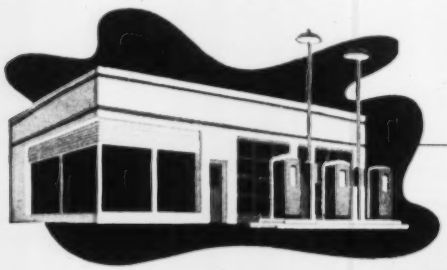

extra white

TRINITY WHITE
Portland Cement

Use Trinity—the *whitest* white cement. A true portland cement that meets ASTM and Federal specifications. Trinity is first choice for architectural concrete units, terrazzo, stucco, paint and other uses. Regularly advertised to architects and other factors in the industry. Gives a pure white and true colors when pigments are added. Ask for Trinity White. Trinity Division, General Portland Cement Co., 111 W. Monroe St., Chicago; Republic Bank Bldg., Dallas; 816 W. 5th St., Los Angeles.

TRINITY WHITE
PORTLAND CEMENT

TRINITY WHITE is a *true* Portland Cement

as white as snow

A full Head of Steam

in 30 minutes or less with a

Cleaver-Brooks Mobile Steam Boiler

for pile-driving or extracting

Heavy-duty built to provide fast, dry steam — in dependable and ample supply—hot, dry steam that means less condensate at the hammer—smooth, powerful hammer action — steam that enables operators to drive more piling in less time—that cuts man hours on every job.

Self-contained and MOBILE — easily towed by truck or tractor from job to job — quickly moved from one location to another on the job. Haul it to the job (no crane needed to set it up) — hook up water and steam lines — start burner — and in 30 minutes or less you have a good "head of steam"—ready for work.

No need to bank fires at night — oil-fired — rapid starting — for an early start in the morning. Operates at 50% to 100% of rating without affecting its guaranteed efficiency of 80%.

All-year, all-season usefulness — besides pile-driving and extracting, use it for asphalt plant, ready-mix concrete plant, winter concrete operations and for thawing and miscellaneous heating. Write for bulletin.

CLEAVER-BROOKS COMPANY
389 E. Keefe Avenue Milwaukee

- Trailer mounted for easy towing.
- Skid mounted for installation on your truck or trailer.
- Fast Steaming.
- Low-fire start.
- Constant steam pressure through automatic low and high fire control.
- Electric ignition.
- Self-contained fuel tanks.
- All-weather protected.
- Factory finished and tested.
- Choice of gasoline or electric motor.
- Clean, smokeless operation.
- Boiler horsepower—80-125.
- Capacity lbs. of steam per hour (212° F.)—2760-4300.

. . . WITH THE FAMED FOUR-PASS HIGH EFFICIENCY DESIGN OF

Cleaver-Brooks

STEAM BOILERS

SEND FOR bulletin "Modern Pile-Driving and Extracting with Cleaver-Brooks Mobile Steam Boilers" . . . provides complete data and specifications.

Know how to cut concrete placing costs?

call on

BLAW-KNOX

Engineering *"KNOW HOW"*

plus

Blaw-Knox Steel Forms

Blaw-Knox Steel Forms in place for a tunnel arch pour on the Boysen Dam railroad relocation tunnel. Two 75-ft. pours per week were completed with each of the two sets of forms.

Blaw-Knox Steel Forms handle a wide variety of jobs. Here Blaw-Knox Pier Forms are used during construction of the Emsworth Locks at Pittsburgh, Pa.





Above, Sewage disposal plant for Chicago's southwest side was constructed with Blaw-Knox Steel Forms.

At right, Blaw-Knox telescopic Steel Forms set to pour 96" sewer at Fort Wayne, Ind.

WHATEVER your concreting problems, you'll get the job done faster and well within your estimate when you combine the time saving efficiency of Blaw-Knox Steel Forms with the money-saving recommendations of Blaw-Knox engineering service. This consultation service is available to any contractor, from the blueprint stage to the final pour. Blaw-Knox engineers help you select the forms just right for the job, work with you in planning for simplified forming methods that often reduce the number of operations necessary, speed the job, and keep costs at minimum levels. The experience gained over 40 years by the original and most prominent manufacturer of Steel Forms for heavy construction is at your service. Write today for advice and information on your concreting problems. Ask for Bulletin 2035.

BLAW-KNOX

BLAW-KNOX DIVISION OF BLAW-KNOX CO., Farmers Bank Bldg., Pittsburgh 22, Pa.

New York • Chicago • Philadelphia • Birmingham • Washington

CONSTRUCTION REPORTS-Second Section

WATER SUPPLY

BIDS ASKED

B.C., Prince Rupert—B.A. 5/8—H.D. Thain, city purch. agt., City Hall, supplying c.i. pipe valves, fittings and, at 4,200 ft. 6- in c.i. pipe, Class B, 151 hydrants, three-outlet type with hub connection; 35 gate valves 6-in. hub ends for c.i. pipe, 6 tees, 6 in. hub and for c.i. pipe, 2 crosses, 6-in. hub end for c.i. pipe, 3 bends, 45 degrees, 6-in. hub ends for c.i. pipe.

Md., Towson—B.A. 5/9—Comrs., Baltimore Co. Court House, Contr. 253 D. S. & W. approx. (water) 8,240 lin. ft. 6- to 12-in. C. I. pipe, appurtenances, 157 meter vaults, single setting, 12 meter vaults, twin setting, 3,840 lin. ft. 4-in. house connections, 210 lin. ft. 1-in. house connections, sanitary sewers, 4,130 lin. ft. 6- and 8-in. vit. clay pipe, 55 galvanized steel pipe, 250 lin. ft. 6- to 8-in. reinf. conc. pipe, city, 1,710 lin. ft. 25- to 33-in. reinforcing conc. pipe, 12 corrugated metal pipe, 1o4 lin. ft. CMP arch inlets, manholes, etc., Contr. 209 D. S. & W. (A) approx. 37,032 lin. ft. 6- to 15-in. vit. clay pipe, 512 lin. ft. 8- and 16-in. C. I. pipe for sewers, manhole, etc., Bl. 20,335 lin. ft. 6- to 12-in. C. I. pipe fittings, valves, fire hydrants, etc. (C) 1,211 lin. ft. 15- to 30-in. reinforcing conc. culvert pipe, inlets, manholes, etc., Plans deposit $5, each. Wm. F. Neale, Court House, co. engr. CD 11/26/44.

† Washington—B.A. About 5/11—U. S. Eng., 4735 E. Marginal Way, Seattle, Zone 4, water supply and treatment plant, Mud Mountain Dam, near Enumclaw, Serial No. CIVENG-45-108-50-69.

Va., Gate City—B.A. 5/12—Weber City Sanitary Dist., Scott Co., J. F. Bushelman, chm., Post Office, R. F. D. 4, Rt. 1, 1/4 mi. S. of Bristol-Gate City line, and 700 house services, Inc. 2,1-k m.g.d. filtration plant, Elev. 3 200,000 gal. steel storage reservoir, Alt. 200,000 gal. resin-concrete storage reservoir, Plans deposit $15, E. V. St. Martin, Gate City, engr. W. H. Sours, Hampton, engr. CD 2/14.

Fla., Barton—B.A. 5/15—City, water treatment plant, Plans deposit $35, Russell & Axon, P.A. Box 1431, Daytona Beach, engrs.

N. D., Tioga—B.A. 5/17—City WW, $60,000, Dakota Eng. & Constr. Co., Valley City, engr. CD 9/25/46, under Sewers, Waste Disposal.

SEWERS, WASTE DISPOSAL

BIDS ASKED

Ia., Grinnell—B.A. 5/11—City, City Hall, relief sewer constr., outfall sewer repair, sewage plant extension, improv., Approx. $50,000, Stanley Eng. Co., Hershey Bldg., Muscatine, engr. CD 12/30.

O., Dayton—B.A. 5/11—Dpt. Service & Buildings, J. G. Baker, dir., Municipal Bldg., Zone 2, construct 1 sect. of main sewer, an intercepting sewer, head of Great Miami River from Fairview Ave. to Dewster St., $293,726. Plans deposit $25. CD 5/27.

Fla., Bartow—B.A. 5/15—City, sanitary sewer improvements, 12-in. to 24-in. R.C.P., 1 lift stations, etc. Approx. $100,000. Plans deposit part 1, $15, Parts 2 & 3, $10. Russell & Axon, P.O. Box 1431, Daytona Beach, engrs. CD 12/2/48.

Minn., Winona—B.A. 5/15—City, P. G. Woodside, recorder, sanitary branch and storm sewer. Approx. $50,000. C. W. Frank, city engr. CD 11/16.

La., Lafayette—B.A. 5/16—City, City Hall, storm drainage sys. Plans deposit $15. J. B. McCrary Co., Inc., 22 Marietta St. Bldg., Atlanta, Ga., engr. CD 12/14/49.

Tenn., Kingsport—B.A. 5/16—City, 4,850 lin. ft. 21-, 24- and 30-in. relief sewers and appurtenances, Plans deposit $20, Wilkinson & Gingrich, P.O. Box 1028, Atlanta, Ga., engrs.

N. D., Tioga—B.A. 5/17—City, sewerage sys. $70,000, Dakota Eng. & Constr. Co., Valley City, engr. CD 9/25/46.

BRIDGES

BIDS ASKED

STATE HIGHWAY LETTINGS

May 9	May 16
Iowa	Texas
Maryland	May 17
May 10	Texas
Maine	May 18
May 12	California
Kentucky	May 23
	Delaware & New Jersey

LOW BIDDERS

▲ Pennsylvania—Pennsylvania Turnpike Comm., 11 N. 4 St., Harrisburg, Apr. 26, substructure of Plum Creek Viaduct on western extent of Pennsylvania Turnpike (sect. 31 BC, 1.270 ft. Allegheny Co. from Division Inc., 331 Boulevard St., Pittsburgh, $266,666 (Superstructure of Plum Creek Viaduct (sect. 31 BC, western extent of Pennsylvania Turnpike 1,005 ft. Allegheny Co. and contract superstructure of Brush Creek Viaduct (sect. 11GF, western extent of Pennsylvania Turnpike, 1,005 ft. Westmoreland Co., from Bethlehem Steel Co., E. 3 St., Bethlehem, $1,272,554 (superstructure of Willow Run Viaduct (sect. 30 DE, western extent of Pennsylvania Turnpike 1,004.34 ft. Allegheny Co., from First Pitt Bridge Work, Keystone Hotel, Pittsburgh, $383,645 (substructure of Willow Run viaduct on western extent of Pennsylvania Turnpike (sect. 30DE, 604 ft., Allegheny Co., from Holmes Constr. Co., Palmer St., Wooster, O., $197,884. CD 4/6 and 4/14.

STREETS AND ROADS

BIDS ASKED

STATE HIGHWAY LETTINGS

May 9	May 16
Iowa	Texas
Maryland	May 17
Ohio	California
May 11	Louisiana
New Jersey	Texas
May 12	May 19
Kansas	Pennsylvania
Kentucky	May 26
Minnesota	Pennsylvania

Ia., Clarinda—B.A. 5/11—Bd. Supervs., Page Co., Grading, base training 174.85 mi., Elev. $50,000, G. Brewer, Clarinda, engr.

Minn., Marshall—B.A. 5/16—Lyon Co., G. O. Carlson, road grading 4 mi. road between 4 mi. north of T. H. 19 and T. H. 19 east of Marshall, Proj. S. P. 42-505-03, ISAR 5; Minn. Proj. S 233, Plans deposit 70c, grading 3 mi. road between T. H. 59, southeast of Marshall and 3 mi. east, Proj. S. P. 42-509-02 ISAR 16; Minn. Proj. S 527 (11), Plans deposit 70c, grading 6 mi. road between T. H. 23 in Cottonwood and SAR 6, 2 mi. south of Wood Lake, Proj. S. P. 42-510-01 ISAR 10 and S. P. 87-508-06 ISAR 11; Minn. Proj. S 298 (7), Plans deposit $1.00, grading 2.4 mi. road between Taunton and North 60 Corner, Proj. S. P. 42-513-02 (SAR 2); Minn. Proj. S 650 (4), Plans deposit 70c, Over $50,000. H. Borland, co. hy. engr.

† North Dakota—B.A. 5/16—U. S. Eng., Fort Lincoln, Bis., 300 Bismarck concrete sidewalks, Riverdale, Serial No. CIVENG-32-015-50-74. CD 6/1-49, under Earthwork, etc.

EARTHWORK, WATERWAYS

BIDS ASKED

† Mass., Woods Hole—B.A. 5/9—First Coast Guard Dist., 447 Commercial St., Boston, Sheet pile bulkhead, Coast Guard Depot, 50,747.50, Bids 8-7 rejected, CD 2/23.

† New Jersey—B.A. 5/9—U. S. Eng., 90 Lafayette St., New York 13, N. Y., dredging approx. 6,210,000 cu. yds. in Raritan River Entrance Channel from Newark Bay, Serial No. CIVENG-50-035-50-139.

† Virginia—B.A. 5/9—U. S. Eng., Dist. of Foot St., Norfolk, clearing Pierces Hill and U. Boggs Island Reservoir Proj., Roanoke River, Serial No. CIVENG-44-137-50-68. CD 4/12.

† South Dakota—B.A. 5/10—U. S. Eng., 1106 Jackson St., Omaha, Neb., earthwork Stage III of the Oahe Dam Proj., Missouri River, approx. 80 mi. northwest of Yankton and 2 mi. south of Lake Andes, Tripp, Mellette and Gregory Counties, Serial No. CIVENG-45-1-50-1. CD 4/26.

Ont., Ottawa—B.A. 5/10—Acting Dep. Dir. P. Wes., Harbor Bldg., requiring about 8,000 cu. yards of Rubble Stone, Approx. $20,000. Plans deposit $20, F.o.b. cars, shipping point or f.o.b. cars Montreal, and storage bins, engr.

† Washington—B.A. —Bureau Reclamation, Dpt. Interior, Bldg. 1-A, Denver Federal Center, Denver, Colo., furnishing del. f.o.b. cars shipping point or f.o.b. cars Ephrata, of storage tank, air receiver, governor valve, pipe nipples, manhole cover and accessories for machine shop bldg., Grand Coulee Dam, Columbia Basin Proj., Spec. 2968, L. N. McClellan, ch. engr.

† Illinois—B.A. 5/12—U. S. Eng., 808 U. S. Court House and Custom House, S. Louis 1, Mo., dredging in Alton Pool of Illinois Waterway, St. Louis Dist., Inv. No. CIVENG 23-065-50-92.

† Oregon—B.A. 5/12—U.S. Eng., 628 Pittock Block, Portland, Zone 5, reinforcing, septic tank at Bonneville Dam, Serial No. CIVENG 35-026-50-339.

† California—B.A. 5/16—U. S. Eng., 1209 Eight St., Sacramento, levee setbacks and bank protection along Sacramento River, M & T Chico Ranch, Bl. 113-R, Serial No. CIVENG-04-167-50-56. CD 4/21/48.

† Idaho—B.A. 5/16—Bureau Reclamation, Anderson Mountain, mine road & station, Boise Proj., about 44 mi. northeast of Mountain Home, Spec. 741, CD 4/12/44.

† Virgin Islands, Charlotte Amalie, St. Thomas—B.A. 5/17—Rufe B. Newman, Jr., deputy comr. Engineering & Construction Community Facilities Service, General Services Administration, General Services Bldg., Wash., D. C., waterfront improv., St. Thomas, Proj. No. 53-108, Plans deposit $50, Extended date, R. E. Vernon & Assoc., Bell Bldg., Montgomery, Ala., consult., engrs. CD 4/4.

† California—B.A. 5/16—U. S. Eng., Wright Bldg., Sacramento, rock excav., concreting tunnel, installing slide gates, etc. for Isabella Dam on Kern River near Isabella, Kern Co., spec. 04-167-50-57. Plans deposit $50, CD 4/22/48.

† Montana—B.A. 5/18—U.S. Eng., Fort Peck, misc. grading and drainage sys., Fort Peck, Civil No. 24-016-50-42. CD 4/4.

AIRPORTS

BIDS ASKED

† Pa., Willow Grove—GASOLINE STORAGE FACILITIES—B.A. 5/15—U. S. Navy Dpt., Construction Officer, Naval Base, Phila., 20, gasoline and storage facilities, NOY 19321, Spec. 2100, Approx. $35,000. CD 4/28.

† O., Zanesville—SQUADRON BLDG.—B.A. 5/11—Dir. Finance & Budgeting, Mayor Hon. Bldg., 101 Fort Hayes, Columbus 15, Spec. 146, for communication squadron bldg. at Zanesville Municipal Airport.

▲† O., Cleveland—RESEARCH LABORATORY, etc.—B.A. 5/15—National Advisory Com. for Aeronautics, Brookpark Rd., 2 story, hollow T-shaped, 58x185 ft. and 80x100 ft. instrument research laboratory, $600,000; propulsion sciences laboratory equip. bldg. $1,000,000. CD 2/6.

AMERICANS ABROAD

Belgium, Antwerp—Societe Industrielle Belge Des Petroles, Antwerp, awarded contract 50,000 bbl. per day refinery adjacent to Scheldt River to M. W. Kellogg Co. & Kellogg International Corp., 225 Broadway, New York 7, N. Y., U. S. A.

PUBLIC BUILDINGS

Ont., Petaawa—HOUSING—B.A. 5/3—A. J. E. Smith, engr., Dept. Mortgage & Housing Corp., 959 Fleet St. W., Toronto, 44 houses with bsmnt., Pet. Petaawa (D.N.D. Non Urban No. 3/50. Approx. $110,000. Plans deposit $10.

Ark., Leachville—B.A. 5/9—Leachville School Dist. #3, Dr. Harry Wenger, archt., 1st Federal Bldg., Little Rock, high school. Plans deposit $10.

Ga., Swainsboro—HOSPITAL—B.A. 5/9—Emanuel Co. hospital, extended date. Wilson & Heiga Irvin, 727 Greene St., Augusta, archts. CD 4/28.

Minn., Austin—POWER PLANT—B.A. 5/9—City, Bd. Water, Electric, Gas & Power Comrs., W. D. Dunlap, Jr., city steam generating unit at municipal power plant. Approx. $1,500,000. Plans deposit $15, Hermus, Edelstein & Lutz, 405 Essex Bldg., Minneapolis, engrs. CD 3/29.

† Minn., Little Falls—MESS HALLS, etc.—B.A. 5/9—U. S. Government, c/o Col. R. A. Rossberg, acting U. S. Purchasing & Disbursing Officer for Minn. Camp, Ripley, Comm. National Guard facilities at Camp Ripley, sects. 1 mess halls, 2 mess halls and frames, underground and aerial electric distr. sys., 3 warehouses, 4 $50,000 bettering, Tournent & Tourte, 1437 Marshall Ave., St. Paul, engr.

N. C., Chapel Hill—DORMITORY—B.A. 5/9—University of North Carolina, W. D. Carmichael, jr. controller, dormitory, women's, Approx. $2,000,000. Plans deposit $25, general, $10, each mechanical, electrical work, George Watts Cooper, 111 Corcoran St., Durham, Giles, Wiley & Wilson, 905 Peoples Bank Bldg., Lynchburg, Va., engrs. CD 4/5.

N. C., Raleigh—BOTANY and ZOOLOGY—B.A. 5/9—North Carolina State College, J. W. Harrelson, chairman, bldg. committee, 4 $1,000,000 ea., 4-story, concrete bldgs. and masonry bldgs. Plans deposit $75, Ribberdeen & Bowles, Inc., 1600 Elizabeth Ave., Charlotte, archts.

Va., Lynchburg—BOILER PLANT—B.A. 5/9—At office Dr. Joseph E. Burnett, State Hospital Bd., 9 N. 12 St., Richmond, boiler plant alterations, incl. filling the new boiler equipment by others; boiler plant piping, auxiliary, and service pipe, under trap and pumps for Lynchburg State Colony. $75,000. Plans

deposit $15. Wiley & Wilson, 905 Peoples Bank Bldg., consult. engrs.

B. C., Vancouver—DWELLINGS—B.A. 5/4—J. L. Adams, regional construction engineer, Central Mortgage & Housing Corp., 360 Homer St., 213 frame dwellings. Approx. $650,000. Plans deposit $25. CD 11/19/47.

Kan., Hugoton—COURTHOUSE—B. A. 5/10—Stevens Co., Hugoton, courthouse. $375,000. Mann & Co., Hutchinson, archts. CD 3/31.

Ill., Alton—SCHOOL—B.A. 5/10—Alton Community Consolidated School Dist. 151 of Madison Co., H. Edward Aeger, secy., Bd. Educ., Haskell House, 1211 Henry St., P. W. Vocational School. $500,000. Plans deposit $30. Albert M. Cordie, 1452 State St., East St. Louis, archt. CD 10/4/49.

N. Y., Cortland—PHYSICAL EDUCATION, etc.—B.A. 5/10—Bureau Contracts & Accounts, Albany, physical educ. and health bldg. at State Teachers College. $712,950. Plans deposit $30. CD 9/29/49.

▲ N. Y., Dannemora—BUILDINGS—B.A. 5/10—Bureau Contracts & Accounts, Kitchen, Mess Hall and Ward Bldg. 40, at Dannemora State Hospital. $2,000,000. Plans deposit $30. CD 6/29/49.

▲ N. Y., Poughkeepsie—HOUSING—B.A. 5/10—Poughkeepsie Housing Auth., 249 Mill St., housing. Smith & Smith, Suffern, archts. $1,900,000. Hunt, Tompkins & Dreyer, 49 Market St., archts. CD 8/25.

N. C., Durham—COURTHOUSE—B.A. 5/10—Bd. Comrs., Durham Co., E. J. Swindell, Jr., mgr., Durham. 4 story courthouse addn., alterations. Plans deposit $25; George F. Hackney & Charles F. Knott, Durham, archts. CD 4/25.

O., Cleveland—SCHOOLS—B.A. 5/10—Bd. Educ., 1380 E. 6 St., Jerice Valley View School. Plans deposit $10. Arthur Barr, c/o owner, city archt. CD 2/8.

B. C., Chilliwack—HOUSING—B. A. 5/10—J. D. McCarthy, secy., Canadian Commercial Corp., 70 Lyon St., Ottawa, Ont., 250-man barrack block at Army Base. Approx. $300,000. G. Brault, Dpt. P. Wks., Hunter Bldg., Ottawa, Ont., archt.

Ont., Ottawa—STATISTICS—B.A. 5/10—Acting Secy., Dpt. P. Wks., Hunter Bldg., Ottawa, installation, completion of excavation, backfill, foundations and footings for Dominion Bureau of Statistics Bldg., Tunney's Pasture Development. Approx. $250,000. Plans deposit $70. G. Brault, c/o owner, archt. CD 3/2.

Ky., Hopkinsville—HOSPITAL—B.A. 5/11—B. H. Lowry, Dir. Div. Purchases, 230 State Office Bldg., Frankfort. Negro Ward bldg., incl. women's ward, men's ward dining and administration bldgs. Western State Hospital. Request No. 17BX. Plans deposit $50. Lawrence Casner, Madisonville, archt. J. B. Reeves, Div. Eng., State Office Bldg., Frankfort, ch. engr. CD 3/9.

† Washington—RESIDENCES, etc.—B.A. 5/11—Bureau Reclamation, Dpt. Interior, Ephrata, residences, garages, sewer and water distr. sys., grading, surf. for O&M headquarters, Moses Lake, Columbia Basin Proj., Spec. R1-CD-41, Region 1. L. N. McClellan, Bldg. 7-A, Denver Federal Center, Denver, Colo., ch. engr.

Minn., Red Wing—BUILDING—B.A. 5/11—State Dpt. Administration, Dpt. Public Welfare, Dr. Ruth Boynton, 19 State Capitol, St. Paul, building at State Training School. $425,000. E. D. Cowan, 818 E. First National Bank Bldg., St. Paul, archt. CD 2/14.

O., Mt. Cory—SCHOOL—B.A. 5/13—Bd. Educ., Burns Harrison, Clk., Mt. Cory-Mission Local School Dist., Kiwanis school, near here. Plans deposit $10. A. M. Strauss, 500 Citizens Bldg., Fort Wayne, Ind. archt.

Wis., Madison—SCHOOL—B.A. 5/17—Bd. Educ., 201 W. Washington, Zone 3, West High School. Plans deposit $15. Varlen & Strang, 111 N. Dearborn St., Zone 2, secrets. and engrs. CD 12/26, under LB.

Ala., Hamilton—HOSPITAL—B.A. About 5/16—Marion Co., hospital. Charles H. Nolseny, Jackson Bldg., Birmingham, archt. CD 1/6/47.

Ala., Leighton—HIGH SCHOOL—B.A. About 5/15—Colbert Co., high school, $320,000. Howard Melton, Jr., Sheffield, archt.

† N. M., El Vado—TRAINING CAMP, SITE—B.A. 5/15—Bureau Reclamation, P. O. Box 1336, Albuquerque, quarters, camp site, Service No. 1 proj. Plans deposit $50.

▲† Calif., San Francisco—HOSPITAL—B.A. 5/15—Bids Admiral 12th U. S. Public Health Service Dist., 630 Sansome St., 4 story, steel, tank, foundations, steel, etc., Marine Hospital, Addn., Bid 4113. $3,500,000. Extended date. Stanley Stone & Lee to Mellor, 617 Commercial St., Seattle, Wash.

Tex., Del Rio—HOUSING—B.A. 5/16—C. P. Kell, Veterans Housing Auth., Del Rio, 176 dwellings. Plans deposit $50. Lloyd Pierce, Pierce & Lee Wm. & Simmons, 1101-E Maverick Bldg., San Antonio, archts. Frank T. Drought, 119 W. Pecan St., San Antonio, mechanical engr. Wm. Ehlen, 1213 N. St. Mary's St., San Antonio, electrical engr. CD 2/24.

Tex., Port Arthur—HOUSING—B.A. 5/16—Arthur B. Alton, Housing Port Arthur Independent Sch. Dist., 3rd Warner Bldg., Port Arthur, 200 dwellings. Plans deposit $25; general, $15; mechanical, each. Max Dreyfus, 1210 1/2 Main St., Dallas, archt. CD 12/1/47.

† Utah, Ogden—BUILDING—B.A. 5/16—S. Eng., 180 New Montgomery St., San Francisco, Calif., concreting bldg. 123 to provide tel. and type quarters at Ogden Sub-Depot of Sharpe Quartermaster Depot, Serial No. 1194-44-S-123.

† Wyoming—SWITCHGEAR ASSEMBLY, etc.—B.A. 5/16—Bureau Reclamation, Dpt. Interior, Bldg. 7-A, Denver Federal Center, Denver, Colo., furnishing delivery f.o.b. cars shipping point or f.o.b. job site, Boysen, Bonneville and Shoshoni, Wyo., switchgear assembly, reactors, transformers, for Boysen Power Plant, Boysen Dev., Boysen Unit, Missouri River Basin Proj., Spec. 2471. L. N. McClellan, chf. engr.

Calif., San Francisco—INSTITUTE ADDNS., etc.—B.A. 5/17—Dpt. P. Wks., City Hall, (1) Job 781-general work. Job 781-A plumbing and mechanical work. (2) Job 781-B electrical work John A. O'Connell Vocational and Technical Institute alterations, addns. Approx. $250,000. (1) Plans deposit $50, (2) and (3) Plans deposit $25. Dodge A. Rudy, City Hall, city archt. CD 11/17/48.

▲ Tex., Wichita Falls—HOSPITAL—B.A. 5/17—Wichita Co., The Hospital Auth. of Wichita Co., Wichita Falls, 6 story, about 42x215 ft. masonry general hospital remodeling and addn., concrete pier and beam foundations. $4,300,000. Plans deposit $50. Ray C. Arnold & Jesse G. Dixon, Narsi Bldg., archts. Lindsey & Lindsey, 4801 Lemmon St., Dallas, engrs. CD 3/22, under LB.

LOW BIDDERS

▲ Fla., Tampa—COURTHOUSE—Hillsborough Co., rejected bids, courthouse, L.B. $2,617,708. CD 3/8, under LB.

▲ N. Y., New York—HOUSING—New York Housing Auth., 63 Park Row, Zone, Sect. II, fdns. and general contract for Melrose Houses, Proj. N. Y. NYS-23, incl. Bldgs. Nos. 1, 2, 3, and 4, in easterly portion of area bounded by E. 154 St., Cortland and Morris Aves., and in easterly portion of area bounded by E. 155 and E. 156 Sts., Cortland Park and Morris Aves. from John A. Johnson Sons, 268 41 St., Brooklyn, Zone 32. $2,588,000***plumbing, from Malan Bldg. Co., 25-09 42 Rd., Long Island City, $288,000***heating and ventilating, from Caruso-Stuarey Co., 19 Rue Pre, Mt. Vernon, $269,700. CD 3/30.

▲† N. C., Salisbury—HOSPITAL—Veterans Admin., Munitions Bldg., Wash. 25, D.C., Apr. 25, general contract, medical and surgical bldg. etc., from Gen. Contr. List Form 1810, 907 16 St. N.W., Wash., D. C. $21,654,626, elevators and dumbwaiters, from Westinghouse Electric Corp., 40 Wall St., New York, N. Y. $357,422. CD 3/2.

COMMERCIAL BUILDINGS

BIDS ASKED

▲ Conn., Greenwich—HOUSING—B.A. 5/9—Housing Auth., Town Hall, garden apartments, Hamilton Ave., $1,500,000. Extended date. Holden, McLaughlin Assocs., 570 Lexington Ave., New York 17, N. Y., archts. CD 4/20.

Mo., St. Louis—EDUCATIONAL—B.A. 5/9—Lafayette Park Baptist Church, c/o Rev. C. P. Shields, pastor, 1416 Lafayette Ave., Zone 4, 3 story, basmt., brick & brick veneer, educational bldg. Lafayette Ave. and Preston Pl. Approx. $300,000. Walter J. Hubbard, 4300 Washington Ave., Zone 8, archt. Milligan & Maras, Ambassador Bldg., 411 N. 7 St., Zone 1, engrs. CD 11/24/48.

Pa., Phila.—CONVENT—B.A. 5/9—Nazareth Hospital, Holme Ave., convent. $500,000. Henry D. Dagit & Son, archts.

Wis., Darlington—HOSPITAL—B. A. 5/10—Lafayette Memorial Hospital Assn., Darlington, 2 story, concrete, steel, brick hospital. $150,000. Durrant & Bergast, 147 Jones St., Dubuque, Ia., archts.

Fla., Quincy—CHURCH—B. A. 5/11—First Baptist Church, c/o Hall Eaton & Assocs., archts., James Bldg., Chattanooga, Tenn., archts.

La., New Orleans—HOSPITAL—B.A. About 6/15—Methodist Home Hospital, c/o Roy Johns, archt., 1st Nat. Bank & Trust Co. Bldg., P. O. Box 1442. Negro maternity hospital. $500,000.

Tenn., Memphis—BANK—B.A. About 6/15—First National Bank of Memphis, Sewell W. Mayo, 81 Madison St., First National Bank Bldg., archt. $300,000.

Ala., Birmingham—BANK—B. A. 5/15—First National Bank of Birmingham, c/o Miller & Martin, Volunteer Bldg., Chattanooga, Tenn., archts.

LOW BIDDERS

▲ Tex., Fort Worth—HOUSING, Dpt. Air Force, Fort Worth, 1,000 family housing units, incl. heating, electrical distr. sys., Carswell Air Force Base, Fort Worth. Fort Worth Housing Corp., Fort Worth, Texas. Approx. $4,700,000. CD 3/9.

CONTRACTS AWARDED

▲ Calif., Los Angeles—DWELLINGS—White Oak Park, 1,000 units of 1, 2 and 3 story dwellings, John Zeisel, Berkeley, New Castle, Emmett, Bassett, White Oak, Hesperia and Lindsley Aves., Owner builds. $2,259,700. Paul Duncan, 4823 Lloyd, Culver City, Los Angeles, archt.

▲ Conn., Hartford—HOUSING—M. Sklarz & Son, Goodwin Bldg., 1 Asylum St., New Haven, 16 N. Y. 2 and 3 family dwellings, Sedgwick and Lost Hartford, Owner builds. $2,500,000.

▲ Ill., Chicago—APARTMENT—Cosmopolitan National Bank, 801 N. Clark St., Zone 10, 15 story, reinforced brick, tile and apartment, 115 one-garage, 4900 Marine Dr. to Peter Hondl & Sons, 19 S. Clinton St., Zone 6. $3,847,960. Awarded 3/28. CD 9/23.

▲ Ill., Homewood—HOUSING—Homewood Housing Auth., 2616 E. Joslyn, Zone 29, 44 dwellings, Lake Park Terrace, Owner builds. $1,200,000. Awarded 4/14. Howard E. Anderson, 1215 S. State St., Zone 5, engr.

▲ Ill., Scott Field (Belleville P.O.)—HOUSING—Dpt. Air Force, Scott Air Force Base, manage and house 2,000 unit housing for officers and airmen, on 229-acre tract, to Beck-Utah-Hopkins & Co.; c/o R. H. Hopkins, 1025 Irwin-Kessler Bldg., Dallas, Tex., $8,000,000. Will be built by own forces.

▲ Md., Aberdeen—APARTMENTS—Chesapeake Gardens, c/o contractor, 1 and 2 story, basmt., 402 unit brick, frame garden type apartments, to Henry A. Knott, Inc., 2107 N. Charles St., Baltimore. $3,000,000. Shreve, Walker & Assoc., 600 Woodward Ave., Detroit, Mich., archts. Cyril H. Hebrank, 20 E. Lexington St., Baltimore, local archt.

▲ N. J., Fairlawn—HOUSES—Crestwood Ranch Homes, c/o Percy Simon, archt., 362 Cedar Lane, Teaneck, 700 houses on 60-acre tract in Radburn section on High St. and Ave. D. Owner builds. $3,000,000.

▲ N. J., Ridgewood—HOUSES—Lovel Bldg. Co., c/o Frederick & Harriet Archt., Summit St. and E. Ridgewood Ave., Tenafly, 120 ranch style houses on 60 acre site, East Saddle River Rd. Owner builds. $2,000,000.

▲ N. Y., Brooklyn—APARTMENTS—Irving Kasker, c/o Phillip Birnbaum, archt., 12 E. 48 St., New York, Zone 17, four 6 story apartments, Avenue H between New York and Brooklyn Aves. Owner builds. $2,500,000.

▲ N. Y., Floral Park—APARTMENT—Robert Metrick Co., 220 Fifth Ave., New York, Zone 1, garden apartment, thirty-two, 2 story buildings, for 284 families, Tulip and Carnation Aves. Owner builds. $3,500,000. Max M. Simon, 1841 Broadway, New York, Zone 23, archt.

▲ O., Dayton—HOUSING—Swanno & Sons Constr. Co., Stanley Swanno, pres., 3rd Natl. Bldg., 400 ranch type houses on 120 acre tract, Stroop Rd., Sneyder Rd., area from Fairmont Acres to Marshall Rd. Owner builds. $6,000,000.

▲ Pa., Phila.—APARTMENT—Flamingo Apartments, Inc., 2025 1 St., N. W. Wash., D. C., apartment, 1240-46 N. Broad St. to Charles H. Tompkins, 707 16 St. N. W. Wash. D. C. $3,000,000. CD 2/24.

▲ Ont., Islington—BUNGALOWS—Sarasen Constr. Co., 1200 Government Rd. Toronto, 142 story bungalows, on Glen Park, north of Bloor St. Owner builds. $2,000,000.

INDUSTRIAL BUILDINGS

BIDS ASKED

Ga., Atlanta—SALES and SERVICE—B.A. 5/9—Central Chevrolet Co., c/o Stevens & Wilkinson, archts., 157 Luckie St. N. W., auto sales and service bldg. Approx. $650,000.

Kan., Axtell—WAREHOUSE, etc.—B.A. 5/9—Nemha-Marshall Rural Electric Assn., Axtell, warehouse and shop for rural power dist. $80,000. Layton & Murray, Abilene, archt. CD 3/7.

Pa., Bristol—LABORATORY—B.A. 5/10—Rohm & Haas Co., 222 Washington Square, Phila., laboratory office and plant bldg. Approx. $4,000,000. Wyton & Abbott, 1422 Chestnut St., Phila., archts. CD 4/14.

N. D., Grand Forks—STEAM PLANT MECHANICAL EQUIP.—B.A. 5/11—Minnkota Power Co-operative, Grand Forks, mechanical equip. for extens. to steam plant, Erbe & Co., First Natl. Bank Bldg., St. Paul, Minn., engrs. CD 2/14/47.

Tenn., Jefferson City—WAREHOUSE—B. A. About 5/15—Appalachian Electric Cooperative, Jefferson City, warehouse and office. Diamond, Palm & Puryear, Chattanooga Bank Bldg., Chattanooga, archts.

Tex., Hereford—HEADQUARTERS—B.A. 5/17—Deaf Smith County Electric Cooperative, Inc., c/o Jess Forest, mgr., Hereford, 1 story, 60x150 ft. brick, for headquarters bldg. $70,000. Plans deposit $15. Wyatt Hedrick, New Bldg., Fort Worth, archt. Hereford, 12/17/48, under Lubbock.

▲ Ill., Chicago—BAKERY—Bids Asked—Great Atlantic & Pacific Tea Co., 424 W. 48 St., Zone 37, 175-ton, 48 ft. steel truck, concrete bakery. $1,000,000. Consgr. Mfg. Dist., 33 S. Dearborn St., Zone 3. Albert A. Eastern & Sons Co., 2012 W. Pershing St., Zone 9, engrs.

CONTRACTS AWARDED

▲ Ind., Gary—STEEL, etc.—Budd Co., Inc., Conshohocken, Pa., superstructure, 1 story, 240 x 1000 ft., body stamping plant and office bldg., to S. N. Nielsen Co., 20 N. Wacker Dr., Chicago, Ill., $3,000,000. Awarded 4/14. CD 1/17.

▲ Ky., Gabe—PLANT—Tennessee Gas Transmission Co., Tennessee Bldg., Houston, Tex., design and construction stripping plant to extract by products from natural gas, to Stone & Webster Eng. Corp., 49 Federal St., Boston, Mass. Approx. $9,000,000-$12,000,000. CD 2/28.

▲ S. C., Camden—PLANT—E. I. du Pont de Nemours & Co., Du Pont Bldg., Wilmington 98, Del., 2nd unit, 25x1,000 ft. "Orlon" yarn plant, own forces, to recent $2,500,000. CD 4/24/48.

UNCLASSIFIED

BIDS ASKED

† D. C., Wash.—PIER SUPERSTRUCTURE—B.A. 5/9—U. S. Eng., First and Douglas Sts., N.W., Zone 25, constructing Pier 4 superstructure, Potomac River, north side Washington Channel, Serial No. CIVIL-44-24-0-44. Extended date. CD 4/12.

Mich., Detroit—PARKING AREA—B.A. 5/9—City, Dpt. P. Wks., 108 City Hall, Cadillac Sq., 2 macad. base, 1 conc. surf. pavement, parking area, with asph. macad. driveway with concrete curb and guard posts, Belle Ferry, Mariott Parking Area, G. R. Thompson, city engr. CD 3/3.

Mo., Columbia—STADIUM—B.A. 4/4—For Curators of University of Missouri. Leslie Cross, archt., Jesse Hall, structural steel, concrete East Stand Memorial Stadium addn; Jamieson & Spain, 16th Arcade Bldg., 8th & Olive St., St. Louis, Zone 1, engrs.

† N. Y., Oneonta—POWER SERVICE, etc.—B.A. 5/9—P. Wks. Proj. Third Naval Dist., 90 Church St., New York, Zone 7, power service and radio pattern installation at N.R.V.E.W. facilities, Hartwick College.

N. Y., Rockaway Beach—BOARDWALK DECKING, etc.—B.A. 5/9—Comr. Parks of Office Dist. Parks Arsenal Bldg., Central Park 64 St. and 5 Ave., New York, Zone 21, new decking and incidental work on Boardwalk at Rockaway Beach. Plans deposit $10. Beach 116 St. General Post Office, No. 4 and 116 St., CO 6-2345.

▲ N. C., Wilmington—DOCK—B.A. 4/19—North Carolina Ports Authy., Col. George A. Lintzis, exec. dir., Wilmington, invites bids to dock and provide berthing space for a vessel, $2,000,000. CO 4/21.

O., Toledo—SWIMMING POOL—B.A. 4/4—City Manager, City Hall, Lucas County, Toledo, plans swimming pool at Riverside Park, $120,000. Plans deposit $100. Lennox Bateman, c.e. & surveyor, archt. Chamber of Commerce Bldg., engrs. CO 4/7-16.

† Delaware—TOWER TOWER—B.A. 4/11—C. Eng., 22 N. Broad St., Phila., Pa., steel survey tower in Delaware Bay, about 12.4 mi. southeast 21 degrees from Fourteen Foot Bank Light and adjacent to sunken steamship Mohawk, about 3 mi. east of main ship channel in Delaware Bay, about 50 mi. downstream from Wilmington and about 25 mi. northeastward from Philadelphia. Civil Service to work 56 hr. week, $2.40 under $1.

Pennsylvania—AXE, etc.—B.A. 5/10—General State Auth., 18 and Herr Sts., Harrisburg, contract separation, use and dam at Lyman Run, Susquehannock State Forest, Potter Co., $500,000. Plans deposit $25. The Chester Engineers, 210 East Parkway, Pittsburgh, Zone 12, engrs.

Ont., Toronto—SUBWAY—B.A. 5/23—Toronto Transportation Comm., Keele St. Garage, Keele and Bloor Sts., Bridge Street Subway. Plans deposit $100. CO 1-9-46.

Calif., Berkeley—MEMORIAL STADIUM—B.A. 5/17—Ed. Regents University of California, Berkeley, Memorial Stadium addn. incl. 5,000 seats, restroom, steps, cedar plank seats, paving, etc. Approx. $50,000. Plans deposit $25. Walter T. Steilberg, 1 Orchard Line, Irvine, CO 12-2-49 under EB.

Miss., New Albany—NATURAL GAS SYSTEM—B.A. 5/2—City, City Hall, Albert Patterson, mayor. Boyce Burns & Salyer, 540 Lafayette St., Baton Rouge, La., engrs. CO 4/14.

Miss., Pontotoc—NATURAL GAS—B.A. 5/15—City, City Hall, Albert Patterson, mayor. Plans deposit $50. Porter, Burns & Salyer, 540 Lafayette St., Baton Rouge, La., engrs. CO 4/24.

† New Mexico—EQUIPMENT, etc.—B.A. 5/16—Bureau Reclamation, Dpt. Interior, Bldg. 1, A. Denver Federal Center, Denver, Colo., furnishing, del. f.o.b. cars shipping point or f.o.b. cars Eagle, Ida. Cruise, clearing and hauling one set equip. for Elephant Butte Power Plant for supervisory control and selective telemetering equipment for Elephant Butte Power Plant, switchyard and Caballo Substation; one set equip. for Caballo Substation for supervisory control and selective telemetering equipment for Caballo Substation; one set equip. for telemetering to Elephant Butte Power Plant kilowatts of power interchange at Las Cruces Substation; one set equip. for Las Cruces Substation for supervisory control and selective telemetering equipment for Las Cruces Switching Station for supervisory control and selective telemetering equipment for Elephant Butte Power Plant switchyard; one set equip. as required to operate supervisory control and selective telemetering channel from Elephant Butte Power Plant to Caballo Substation; one set equip. Caballo Substation for supervisory control and selective telemetering of Caballo Substation from Elephant Butte Power Plant; one set equip. Caballo Substation for telemetering to Elephant Butte Power Plant kilowatts of power interchange at Las Cruces Substation. W. Grande Proj. Spec. 2973.

† Ore., Portland—SEWERAGE, WATER WORKS—B.A. 5/16—Bureau Eng., 424 S. Marquam Way, Seattle 4, Wash., water supply well, Multnomah Cemetery, Serial No. 449. CO 4/24.

† Oregon—AIRPORT, etc.—B.A. 5/12—C. Eng., 628 Public Service Bldg., Portland, Ore., for Albert Lea-Freeborn County Airport, marine gate, storm sewer, pump plant and fire protection facilities, grading, surfacing, water and electrical work and drainage at Albert Lea Municipal Airport, Albert Lea, Minn. CO 4/24.

† California—TRANS-PACIFIC LINES—B.A. 5/18—Bureau Reclamation, Dpt. Interior, Bldg. 1, A. Denver Federal Center, Denver, Colo., furnishing, del. f.o.b. cars shipping point or f.o.b. cars Eagle, Ida. Cruise, clearing and hauling one set equip. for Elephant Butte Power Plant for supervisory control and selective telemetering equipment for Elephant Butte Power Plant, switchyard and Caballo Substation; one set equip. for Caballo Substation for supervisory control and selective telemetering equipment for Caballo Substation; one set equip. for telemetering to Elephant Butte Power Plant kilowatts of power interchange at Las Cruces Substation; one set equip. for Las Cruces Substation for supervisory control and selective telemetering equipment for Las Cruces Switching Station for supervisory control and selective telemetering equipment for Elephant Butte Power Plant switchyard; one set equip. as required to operate supervisory control and selective telemetering channel from Elephant Butte Power Plant to Caballo Substation; one set equip. Caballo Substation for supervisory control and selective telemetering of Caballo Substation from Elephant Butte Power Plant; one set equip. Caballo Substation for telemetering to Elephant Butte Power Plant kilowatts of power interchange at Las Cruces Substation. W. Grande Proj. Spec. 2973.

CONTRACTS AWARDED

▲ Tenn., Chattanooga—[illegible]

▲ † Puerto Rico, Sabana Seca—RADAR INSTALLATION—[illegible]

Proposal Advertisements, see pp. 95 to 99

OFFICIAL PROPOSALS

RATE: THE RATE FOR OFFICIAL PROPOSAL ADVERTISING IS $1.00 PER LINE (OR FRACTION) PER INSERTION

COPY RECEIVED UP TO 10:00 A. M. FRIDAY FOR ISSUE OUT NEXT THURSDAY SUBJECT TO SPACE OPEN FOR LAST MINUTE ADS

SEND COPY TO OFFICIAL PROPOSAL DIVISION, ENGINEERING NEWS-RECORD, 330 W. 42ND ST., NEW YORK 18, N. Y.

Bids: May 17, 1950 (722)

Maintenance Building

PENNSYLVANIA TURNPIKE COMMISSION

Harrisburg, Pennsylvania

NOTICE TO BIDDERS

Sealed proposals will be received by the Pennsylvania Turnpike Commission, through the Chairman, 11 North Fourth Street, Harrisburg, Pennsylvania, until 2:00 P.M. (Eastern Daylight Saving Time), the 17th day of May 1950, and immediately thereafter will be taken to the Public Utility Commission's Hearing Room No. 1, North office Building, State Capitol, Harrisburg, Pennsylvania, and publicly opened and read aloud, for the following contract and/or contracts:

For the construction of the Maintenance Building at the location listed below.

Contract No.	Maintenance Building No.	Station	County
228	2	240+50	York
229	2	62+00	Lancaster
240	2	1258+00	Lancaster
241	4	871+50	Chester

The work to be performed under this contract consists of the construction of the Maintenance Building, paved areas, road, concrete sidewalks, etc., at points on the Turnpike listed above, not including however, the plumbing, the heating systems, the electrical work, or the sealing and sodding, except as called for in the specifications or as shown on the Contract Drawings.

Copies of plans, specifications, and other contract documents will be on file and open for public inspection at the offices of the Pennsylvania Turnpike Commission, located at Harrisburg, Pennsylvania, on 2 May 1950. Plans, specifications and other contract documents will not be available before this date for inspection or for mailing to prospective bidders. Copies of special provisions for grading, drainage and structures, may be purchased from the Pennsylvania Turnpike Commission for the sum of five ($5.00) dollars per copy.

Plans and specifications may be obtained from the Commission upon deposit of ten ($10.00) dollars for each set, such deposits to be refunded in full to any actual bidder upon return of such documents in good condition within five (5) days after the date of the opening of the bids. Refund will be made for all plans and specifications returned if the project is withdrawn from letting by the Pennsylvania Turnpike Commission. Remittances are payable to the Pennsylvania Turnpike Commission and must accompany requests for contract drawings and specifications.

The Pennsylvania Turnpike Commission reserves the right to award each contract as a separate contract or in any combination of contracts.

The character and amount of bid security to be furnished in bidder is stated in the Instructions to Bidders.

No bids may be withdrawn for thirty (30) days after the scheduled closing time for receipt of bids.

The Pennsylvania Turnpike Commission reserves the right to waive any informalities in or to reject any or all bids.

PENNSYLVANIA TURNPIKE COMMISSION
James F. Torrance
Secretary and Treasurer

Harrisburg, Pennsylvania
2 April 1950
StoMA,EC)25Apr50

Bids: May 17, 1950 (716)

Plumbing Systems

PENNSYLVANIA TURNPIKE COMMISSION

Harrisburg, Pennsylvania

Sealed proposals will be received by the Pennsylvania Turnpike Commission, through the Chairman, 11 North Fourth Street, Harrisburg, Pennsylvania, until 2:00 P.M. (Eastern Daylight Saving Time), the 17th day of May 1950, and immediately thereafter will be taken to the Public Utility Commission's Hearing Room No. 1, North office Building, State Capitol, Harrisburg, Pennsylvania, and publicly opened and read aloud, for the following contract and/or contracts:

For the construction of Plumbing Systems for the following four (4) Maintenance Buildings on the Pennsylvania Turnpike as follows:

Contract No.	Maintenance Building No.	Station	County
228-A	1	240+50	York
229-A	2	62+00	Lancaster
240-A	2	1258+00	Lancaster
241-A	4	871+50	Chester

The work to be performed under this contract is generally in and around the Maintenance Building above mentioned and enumerated. The work does not include the Electrical System, the Heating System nor building construction except as noted in the specifications or as shown on the Contract Drawings.

Copies of plans and specifications and other contract documents, including Reference Drawings, will be on file and open to public inspection at the offices of the Pennsylvania Turnpike Commission, located at Harrisburg, Pennsylvania, on May 2, 1950. Plans and contract documents will not be available before this date for inspection or for mailing to prospective bidders. Copies of Reference Drawings may be purchased from the Pennsylvania Turnpike Commission for the sum of five ($5.00) dollars per set.

Plans and specifications may be obtained from the Commission upon deposit of ten ($10.00) dollars for each set, such deposits to be refunded in full to any actual bidder upon return of such documents in good condition within five (5) days after the date of the opening of the bids. Refund will be made for all plans and specifications returned if the project is withdrawn from letting by the Pennsylvania Turnpike Commission. Remittances are payable to the Pennsylvania Turnpike Commission and must accompany requests for contract drawings and specifications.

The Pennsylvania Turnpike Commission reserves the right to award each contract as a separate contract or in any combination of contracts.

The character and amount of bid security to be furnished in bidder is stated in the Instructions to Bidders.

No bids may be withdrawn for thirty (30) days after the scheduled closing time for receipt of bids.

The Pennsylvania Turnpike Commission reserves the right to waive any informalities in or to reject any or all bids.

PENNSYLVANIA TURNPIKE COMMISSION
James F. Torrance
Secretary and Treasurer

Harrisburg, Pennsylvania
April 25, 1950

(Continued on page 96)

OFFICIAL PROPOSALS

U. S. Government
(Continued from page 95)

Notice to Contractors

GENERAL SERVICES ADMINISTRATION
Community Facilities Service
Washington 25, D. C.

Sealed proposals will be received by Rufe B. Newman, Jr., Deputy Commissioner for Engineering and Construction, Community Facilities Service, General Services Administration, Room 5143, General Services Building, Washington, D. C., until 11:30 o'clock A.M. Eastern Standard Time, on May 17, 1950, for the construction of the following work at Charlotte Amalie, St. Thomas, Virgin Islands, comprising approximately the following quantities in the major items:

PROJECT NO. 53-106—WATERFRONT IMPROVEMENTS
ST. THOMAS, VIRGIN ISLANDS

3,600 cu. yds., Rock Fill
1,500 sq. yds., Grouted Riprap
37,000 lin. ft., Wood Piles
141,000 sq. ft., Steel Sheet Piling
194,000 lbs., Tie Rods
327,000 lbs., Steel Reinforcement
4,600 lin. ft., Creosoted Timber Guard Rail (8" x 16")
2,200 cu. yds., "A" Concrete
330,000 cu. yds., Earth Fill
5,500 lin. ft., Pipe in Storm Sewers (15" to 30")
1,500 cu. yds. Rubble Masonry
20 Manholes, Inlets and Catch Basins
2,700 lin. ft. Combined Curb and Gutter
9,500 sq. yds. 6" Concrete Pavement

At which time and place the proposals will be publicly opened and read aloud. Bids received after closing time of bid opening will be returned unopened.

Plans and specifications and other proposed contract documents are open for public inspection at the District Engineer's office, Charlotte Amalie, St. Thomas, Virgin Islands; the District Engineer's office, 501 Banco Popular Building, San Juan, Puerto Rico; and Room 5143, General Services Building, Washington, D. C.

A set of such documents may be procured from the office of R. L. Kenan & Associates, Consulting Engineers, Bell Building, Montgomery, Alabama, upon deposit of $40.00, all of which will be refunded to bona fide bidders upon the return of plans and specifications, in good condition, within seven days from date of bid opening.

To parties who procure plans and specifications upon payment of $40.00 and who do not submit a bid, $40.00 will be refunded *provided same are returned within seven days from date of bid opening. No refund will be made for return after this time.*

Each proposal must be accompanied by a bid security in an amount of not less than 5 per cent of the total bid.

The successful bidder will be required to furnish a performance bond in an amount equal to 100 per cent of the contract price, and a payment bond in an amount equal to 100 per cent of the contract price, such bonds to cover full performance of the contract and payment for labor and materials.

No proposal may be withdrawn after the scheduled closing time for receipt of bids for at least 30 days.

The Government reserves the right to reject any and all proposals and to waive informalities with respect thereto.

FERE F. SEWARD
Commissioner
(685)

Office of the District Engineer, Corps of Engineers, U. S. Army, 1217 U. S. Post Office and Custom House, St. Paul 1, Minnesota. Sealed bids in duplicate for furnishing all labor and materials and performing all work required for construction of Lower Lock and Dam 2 at St. Anthony Falls, Mississippi River, Minneapolis, Minnesota, will be received in this office until 11:00 A.M. (C.S.T.), 24 May 1950 and then publicly opened. Further information upon application. (7179)

U. S. Government

UNITED STATES DEPARTMENT OF THE INTERIOR, Bureau of Reclamation, Sealed bids (Specifications No. 29954) will be received by Bureau of Reclamation, Denver, Colorado, June 1, 1950, and then publicly opened for furnishing galvanized-steel double-circuit towers and appurtenances, including connection bolts for attaching tower legs to stub angles for the Garrison-Washburn-Bismarck 230-kilovolt transmission line for Missouri-Souris district, Transmission Division, North Dakota, Missouri River Basin Project. Delivery is desired within 300 days. For particulars, address Bureau of Reclamation, Building 1-A, Denver Federal Center, Denver, Colorado.

MICHAEL W. STRAUS, Commissioner.
(713)

UNITED STATES DEPARTMENT OF THE INTERIOR, Bureau of Reclamation, Sealed bids (Specifications No. 30081) will be received by Bureau of Reclamation, Coachella, California, May 24, 1950, and then publicly opened for furnishing labor and materials and performing all work for the construction of operating bridges, Stations 713+40, 1277+40, and 1653+50, Coachella Canal, All-American Canal System, Boulder Canyon Project, California. The work is situated near El Centro, California, and Yuma, Arizona. Principal items are approximately: furnishing and erecting 114,000 lbs. structural steel; 200 cu. yds. concrete; manufacturing and driving 1,670 lin. ft. concrete piles; and other work. Time allowed for completion will be 240 days. For particulars, address Bureau of Reclamation, Coachella, California; or Building 1-A, Denver Federal Center, Denver, Colorado.

MICHAEL W. STRAUS, Commissioner.
(715)

UNITED STATES DEPARTMENT OF THE INTERIOR, Bureau of Reclamation, Sealed bids (Specifications No. 29964) will be received by Bureau of Reclamation, Denver, Colorado, May 25, 1950, and then publicly opened for furnishing one 47,500-hp, 450-rpm, vertical-shaft turbine with pressure regulator and energy absorber and one 48,000-hp, 514-rpm, vertical-shaft turbine with pressure regulator and energy absorber, including model tests, and reports for Colorado-Big Thompson Project, Colorado. Delivery is desired within 660 days. For particulars, address Bureau of Reclamation, Building 1-A, Denver Federal Center, Denver, Colorado.

MICHAEL W. STRAUS, Commissioner.
(716)

OFFICIAL PROPOSALS

Bids: May 17, 1950 (721)

Borings

Kingston, New York
Vicinity of Kingston, N.Y.

Sealed proposals will be received by the New York State Bridge Authority at its office at 22 Ferry Street, Kingston, New York, until 2:00 o'clock P.M. Eastern Daylight Time, on Wednesday, May 17, 1950, at which time and place they will be publicly opened and read for the furnishing of labor and materials necessary in making borings, securing samples and other work incidental thereto in and adjacent to the Hudson River, in easterly waterway line, starting about the vicinity of Mills Point approximately three miles north of Kingston Point.

Plans, specifications, proposal blanks, form of contract, bond and information for bidders may be seen at the office of the New York State Bridge Authority, 22 Ferry Street, Kingston, New York, and copies of the same may be obtained upon application to D. B. Steinman, Consulting Engineer, 117 Liberty Street, New York 6, New York upon a deposit of Fifteen Dollars ($15.00) which sum will be refunded if the plans and specifications are returned to bidders in good condition within twenty (20) days of bids having been received and acted upon by the New York State Bridge Authority, and Ten Dollars ($10.00) of the deposit will be so returned to non-bidders.

A certified check on a National Bank, State Bank or Trust Company in the sum of ten per cent (10%) of the amount of the bid, made payable to the New York State Bridge Authority, must accompany the bid, as a guarantee that the contract will be entered into, if awarded.

A bond in the sum of one hundred per cent (100%) of the contract price will be required.

The New York State Bridge Authority reserves the right to reject any or all bids.

JAMES F. LOUGHRAN
Chairman.

OFFICIAL PROPOSALS

Bids: May 8, 1950 (720)

Furnishing and Delivering Air Compressors

WASHINGTON SUBURBAN SANITARY COMMISSION
CONTRACT NO. 773

Sealed proposals for furnishing and delivering six (6) 105 cubic foot air compressors, trailer mounted and two (2) 105 cubic foot air compressors on skids will be received at the office of the Washington Suburban Sanitary Commission, 4017 Hamilton Street, Hyattsville, Maryland until Monday, May 8th, 1950 at 2:29 P. M. Eastern Daylight Saving Time, at which time and place they will be publicly opened and read.

Specifications may be obtained from W. R. Douglas, Purchasing Agent of the Commission, Hyattsville, Maryland.

Dwight H. Gale, Chairman
Warren Browning
Leland G. Worthington
Commissioners

Bids: May 25, 1950 (712)

Electric Motor Driven Pumps

CITY OF DETROIT, MICHIGAN

Bids will be taken on May 25, 1950, by the Department of Public Works, on contract PW-1071A, for the furnishing and installing of four main electric motor driven pumping units, each having a rated capacity of 425 cubic feet per second against a 45 foot static head, and two dewatering pumping units, each having a rated capacity of 25 cubic feet per second at 65 feet total head for the new Freud avenue storm water pumping station.

Further information regarding bidding requirements may be obtained from the city engineer, 10th floor, Griswold Building, Detroit 26, Michigan.

Bids: May 15, 1950 (723)

New Mound Park Hospital

CITY OF ST. PETERSBURG, FLORIDA

Previously Advertisement for Bids on the new 251 bed hospital for the City of St. Petersburg, Florida, have appeared in this publication stating that proposals would be received at the City Manager until 11:00 AM (EST) on May 15, 1950. The time and date for receiving bids are hereby changed to 11:00 A.M. (E.S.T.), June 2, 1950. All other conditions of the original advertisement remain unchanged.

CITY OF ST. PETERSBURG, FLORIDA
By: Ross E. Wisdom, City Manager

(Continued on page 97)

CONTRACTORS WATCH THIS SECTION
for New Projects
Publish your announcements thru the "Proposal Section" of Engineering News-Record and get their bids.

U. S. Government
(Continued from page 96)

Notice to Contractors

GENERAL SERVICES ADMINISTRATION
Community Facilities Service
Washington 25, D. C.

Sealed proposals will be received by Rufe B. Newman, Jr., Director, Public Works Construction Division, Community Facilities Service, General Services Administration, Room 5143, General Services Building, Washington, D. C., until 11:00 o'clock A.M., Eastern Standard Time, on May 24, 1950, for the construction of telephone and radio link facilities and buildings on the Islands of St. Thomas and St. Croix (U. S. Virgin Islands) as follows:

PROJECT No. 53-III, ST. THOMAS TELEPHONE SYSTEM
(Project No. 13, Public Law 516, 78th Congress)

Subproject 13A — Outside Telephone Plant, St. Thomas.

Subproject 13B—Inside Telephone Plant, Charlotte Amalie.

Subproject 13C—Subscriber Telephone Plant, St. Thomas.

Subproject 13D—Radio Link Stations, Virgin Islands.

Subproject 13X—Telephone Exchange, Charlotte Amalie.

PROJECT No. 53-IV, ST. CROIX TELEPHONE SYSTEM
(Project No. 26, Public Law 516, 78th Congress)

Subproject 26A — Outside Telephone Plant, St. Croix.

Subproject 26B—Inside Telephone Plant, Christiansted and Frederiksted.

Subproject 26C—Subscriber Telephone Plant, St. Croix.

Subproject 26X—Telephone Exchanges, Christiansted and Frederiksted.

At which time and place the proposals will be publicly opened and read aloud. Bids received after closing time of bid opening will be returned unopened.

Plans and specifications and other proposed contract documents are open for public inspection at the Local Engineer's office, Charlotte Amalie, St. Thomas, U. S. Virgin Islands; the District Engineer's Office, 301 Banco Popular Building, San Juan, Puerto Rico and Room 5130, General Services Building, Washington, D. C. A set of such documents may be procured from any of the above-cited offices upon deposit of $40.00, all of which will be refunded to bona-fide bidders upon the return of plans and specifications in good condition within seven days of date of bid opening.

Each proposal must be accompanied by a bid security in an amount not less than 5 percent of the total bid.

Bids will be accepted on any single subproject or project.

The successful bidder(s) will be required to furnish performance bond(s) in an amount equal to 100 percent of his (their) contract and payment bond(s) in an amount equal to 100 percent of his (their) bid, such bond(s) to cover full performance of the contract(s) and payment for labor and materials.

No proposal may be withdrawn after the scheduled closing time for receipt of bids for at least 90 days.

The Government reserves the right to reject any and all proposals and to waive informalities with respect thereto.

PERE F. SEWARD
Commissioner
(852)

OFFICIAL PROPOSALS

Bids: May 17, 1950 (C78)

Heating Systems

PENNSYLVANIA TURNPIKE COMMISSION
Harrisburg, Pennsylvania

Sealed proposals will be received by the Pennsylvania Turnpike Commission through the Chairman, 11 North Fourth Street, Harrisburg, Pennsylvania, until 2:00 P.M. (Eastern Daylight Saving Time) the 17th day of May 1950, and immediately thereafter will be taken to the Public Utility Commission Hearing Room No. 1, North wing, State Capitol Building, Harrisburg, Pennsylvania and publicly opened and read aloud, for the following contract and/or contracts:

OFFICIAL PROPOSALS

For the construction of Heating Systems for the following four (4) Maintenance Buildings on the Pennsylvania Turnpike as follows:

Contract No.	Maintenance Building No.	Station	County
258-H	4	240+50	York
259-H	5	55+00	Lancaster
260-H	3	122+00	Lancaster
261-H	4	371+50	Chester

The work to be performed under this contract is generally in and around the Maintenance Buildings above mentioned and enumerated. The work does not include the Electrical systems, the Plumbing systems or building construction except as noted in the specifications or as shown on the Contract Drawings.

Copies of plans and specifications and other contract documents, including Reference Drawings, will be on file and open to public inspection at the Offices of the Pennsylvania Turnpike Commission, located at Harrisburg, Pennsylvania, on May 2, 1950. Plans and contract documents will not be available before this date for inspection or for mailing to prospective bidders. Copies of Reference Drawings may be purchased from the Pennsylvania Turnpike Commission for the sum of five ($5.00) dollars per set.

Plans and specifications may be obtained from the Commission upon deposit of ten ($10.00) dollars for each set, such deposits to be refunded in full to any actual bidder upon return of such documents in good condition within five (5) days after the date of the opening of the bids. Refund will be made for all plans and specifications returned if the project is withdrawn from letting by the Pennsylvania Turnpike Commission. Remittances are payable to the Pennsylvania Turnpike Commission and must accompany requests for contract drawings and specifications.

The Pennsylvania Turnpike Commission reserves the right to award each contract as a separate contract or to any combination of contracts.

The character and amount of bid security to be furnished by bidder is stated in the Instructions to Bidders.

No bids may be withdrawn for thirty (30) days after the scheduled closing time for receipt of bids.

The Pennsylvania Turnpike Commission reserves the right to waive any informalities in or to reject any or all bids.

PENNSYLVANIA TURNPIKE COMMISSION
James F. Torrance
Secretary and Treasurer

Harrisburg, Pennsylvania
April 25, 1950

Bids: May 17, 1950 (C69)

Electrical Systems

PENNSYLVANIA TURNPIKE COMMISSION
Harrisburg, Pennsylvania

Sealed proposals will be received by the Pennsylvania Turnpike Commission through the Chairman, 11 North Fourth Street, Harrisburg, Pennsylvania, until 2:00 P.M. (Eastern Daylight Saving Time) the 17th day of May 1950, and immediately thereafter will be taken to the Public Utility Commission Hearing Room No. 1, North wing, State Capitol Building, Harrisburg, Pennsylvania and publicly opened and read aloud, for the following contract and/or contracts:

For the construction of Electrical Systems for the following four (4) Maintenance Buildings on the Pennsylvania Turnpike as follows:

Contract No.	Maintenance Building No.	Station	County
258-E	4	240+50	York
259-E	5	55+00	Lancaster
260-E	3	122+00	Lancaster
261-E	4	371+50	Chester

The work to be performed under this contract is generally in and around the Maintenance Buildings above mentioned and enumerated. The work does not include the Plumbing Systems, the Heating systems or building construction except as noted in the specifications or as shown on the Contract Drawings.

Copies of plans and specifications and other contract documents, including Reference Drawings, will be on file and open to public inspection at the Offices of the Pennsylvania Turnpike Commission, located at Harrisburg, Pennsylvania, on May 2, 1950. Plans and contract documents will not be available before this date for inspection or for mailing to prospective bidders. Copies of Reference Drawings may be purchased from the Pennsylvania Turnpike Commission for the sum of five ($5.00) dollars per set.

Plans and specifications may be obtained from the Commission upon deposit of ten ($10.00) dollars for each set, such deposits to be refunded in full to any actual bidder upon return of such documents in good condition within five (5) days after the date of the opening of the bids. Refund will be made for all plans and specifications returned if the project is withdrawn from letting by the Pennsylvania Turnpike Commission. Remittances are payable to the Pennsylvania Turnpike Commission and must accompany requests for contract drawings and specifications.

The Pennsylvania Turnpike Commission reserves the right to award each contract as a separate contract or to any combination of contracts.

The character and amount of bid security to be furnished by bidder is stated in the Instructions to Bidders.

No bids may be withdrawn for thirty (30) days after the scheduled closing time for receipt of bids.

The Pennsylvania Turnpike Commission reserves the right to waive any informalities in or to reject any or all bids.

PENNSYLVANIA TURNPIKE COMMISSION
James F. Torrance
Secretary and Treasurer

Harrisburg, Pennsylvania
April 25, 1950

Bids: June 2, 1950 (C71)

Sewage Treatment Plant

STATE OF RHODE ISLAND AND PROVIDENCE PLANTATIONS
DEPARTMENT OF FINANCE
DIVISION OF PURCHASES

Sealed bids for constructing Bucklin Point Sewage Treatment Plant in East Providence, Rhode Island will be received at office of State Purchasing Agent, State House, Providence, until 10 A.M., Eastern Daylight Saving Time, on June 2, 1950 and publicly opened and read at that time.

Project includes construction of seven (7) sedimentation buildings from 24x36 ft to 24x96 ft in size, one (1) Primary Aeration Tank, 55x122 ft, two settling Tanks each 68x220 ft, two Chlorination Tanks, 15 ft diameter and 20 ft diameter respectively, two Sludge Digestion Tanks each 50 ft diameter, sewage, manhole, pump and pipe lines, equipment and appurtenant work.

Drawings and contract documents may be seen on or after May 1, 1950 at above office or office of Blackstone Valley Sewer District, Pawtucket, at State Office Building, Providence, Rhode Island. Copies may be obtained at Purchasing Agent's office, Room 45, State House, Providence, Rhode Island, Monday to Friday, except Saturdays and holidays, 9 A.M. to 4:30 P.M., and may be obtained from office of State Purchasing Agent on filing deposit, all of which will be refunded to unsuccessful bidders upon return of the drawings and documents in good condition, after award has been made.

Bid security $12,000 certified check, bid bond, or cash, performance bond 100%.

Prevailing wage rates and Public Work labor laws applicable.

FRANKLYN A. ADAMS
STATE PURCHASING AGENT

(Continued on page 98)

Contractors Watch This Section —

for new projects. Publish your announcements through the proposal sections of *Engineering News-Record* and get their bids.

U. S. Government
(Continued from page 97)

UNITED STATES DEPARTMENT OF THE INTERIOR, Bureau of Reclamation. Sealed bids (Specifications No. 3001) will be received by Bureau of Reclamation, Denver, Colorado, May 25, 1950, and then publicly opened for furnishing hollow-metal doors and fire doors for Grand Coulee Pumping plant and for service bay RS control bay R, and units R1 to R9, inclusive, for Grand Coulee Power Plant, Columbia Basin Project, Washington. Delivery is desired within 150 days. For particulars, address Bureau of Reclamation, Building 1-A, Denver Federal Center, Denver, Colorado.

MICHAEL W. STRAUS, Commissioner.
(7744)

UNITED STATES DEPARTMENT OF THE INTERIOR, Bureau of Reclamation. Sealed bids (Specifications No. 2953) will be received by Bureau of Reclamation, Coulee Dam, Washington, June 1, 1950, and then publicly opened for furnishing labor and materials and performing all work for the construction of machine shop, completion of warehouses A and B, and construction and installation of utilities in industrial area, Coulee Dam Division, Columbia Basin Project, Washington. The work is situated near the left abutment of Grand Coulee Dam, about 20 miles northeast of Cedar, Washington. Principal items are approximately excavation, 15,000 cu yds; erection of buildings, 72,000 sq ft; yds of concrete, 2,200; 272,000 lbs of structural steel; installation of crane, miscellaneous equipment, miscellaneous metalwork, and electrical systems; asphaltic concrete, 26,000 sq yds; and other work. Time allowed for completion will vary from 240 to 420 days. For particulars, address Bureau of Reclamation, Coulee Dam, Washington, or Building 1-A, Denver Federal Center, Denver, Colorado.

MICHAEL W. STRAUS, Commissioner.
(7745)

UNITED STATES DEPARTMENT OF THE INTERIOR, Bureau of Reclamation. Sealed bids (Specifications No. 3000) will be received by Bureau of Reclamation, Friant, California, May 25, 1950, and then publicly opened for furnishing labor and materials and performing all work for the construction of earthwork, pipe line and concrete, laterals 1-W-3.8 and 1-W-3.8 sublaterals, Lindmore Irrigation District, Friant-Kern Canal distribution systems, Central Valley Project, California. The work is situated in the vicinity of Lindsay, California. Principal items are approximately furnishing and laying 68 lin ft concrete pipe, 24 to 42 in diam, and heads; 23,000 cu yds excavation for pipe trenches; and other work. The work is subdivided into 2 schedules. Time allowed for completion will be 150 days. For particulars, address Bureau of Reclamation, Friant, California, or Building 1-A, Denver Federal Center, Denver, Colorado.

MICHAEL W. STRAUS, Commissioner.
(7775)

Department of Commerce, Bureau of Public Roads, April 18, 1950. SEALED BIDS will be received at the office of the Division Engineer, Bureau of Public Roads, 1400 Cherry Street, Augusta, Georgia, until 10:00 a.m., E.S.T. MAY 19, 1950, for Project 29E, Part B, Blue Ridge Parkway, Buncombe County, North Carolina, Grading, Draining, Reinforced Concrete Bridge, and other work, Length, Roadwork, 4.8 miles; Bridge, 0.12 mile. The approximate quantities of the principal items are: 125,000 cu yd Excavation; 12,000 ton Crushed Gravel or Crushed Stone Base Course; 800 cu yd Cement Concrete; and 7,840 lin ft Concrete Culvert Pipe. Minimum wage rates have been fixed as required by law. For plans and specifications, a deposit of $5.00 each or CERTIFIED checks made payable to the Treasurer of the United States will be required to insure their return within 10 days after the opening of bids. Plans, Specifications and Proposal forms may be obtained at the address given above or at Bureau of Public Roads, 450 State and City Office Building, Richmond, Virginia. H. G. Specht, Division Engineer.
(7781)

OFFICIAL PROPOSAL

RATE: $1.00 per line for each insertion.

CLOSING DATE: 2:00 p.m. Eastern Standard Time on

SEND COPY: Official Bureau, Room 1600, 330 West Broadway, New York 13, N. Y.

OFFICIAL PROPOSALS

Bids: May 23, 1950 (7700)

The Delaware Memorial Bridge

NOTICE TO BIDDERS

Sealed proposals for construction of "The Pennsylvania Railroad Overpass for "The Delaware Memorial Bridge" over the Delaware River near Wilmington, Delaware, will be received by the Delaware State Highway Department at the office of the Director, Delaware Crossing Division, Continental American Building, Wilmington, Delaware, until 11 o'clock Eastern Standard Time, May 23, 1950. Immediately thereafter proposals will be publicly opened and read in the Council Chamber, Wilmington Hall.

The work involves the following principal quantities:

- 350 cu yds Concrete in Footings
- 810 cu yds Concrete in Shafts
- 435 cu yds Concrete in Superstructure
- 5,000 lin ft Cast-in-Place Concrete Piles
- 163,000 lbs Reinforcing Steel
- 411,000 lbs Structural Steel
- 350 lin ft Pipe Railing

Performance of this contract shall begin promptly after execution of the contract and shall be completed on or before April 1, 1951.

Monthly payments will be made for ninety (90) per cent of the construction completed each month.

Bidders must submit proposals upon forms furnished by the Department.

Each proposal must be accompanied by an acceptable surety bond or certified check for a sum equal to at least ten (10) per cent of the total amount of the proposal.

The Contract will be awarded or proposals rejected within twenty (20) days from the date of opening proposals. The right is reserved to reject any or all bids.

The Plans and Specifications and other contract documents may be examined at the office of the Director, Delaware Crossing Division, and at the office of the Engineers, Howard, Needles, Tammen and Bergendoff, 55 Liberty Street, New York 5, N. Y. One complete set of the Plans and two copies of the Specifications may be obtained from the Engineers upon payment of $25.00. Any prospective bidder who has made such a deposit may secure extra blueprint copies of the Plans upon payment of 10 cents per drawing, and extra copies of the Specifications upon payment of $2.00 per copy.

All Plans and Specifications shall be returned to the Engineers, and on such return $10.00 of the above payment will be refunded. No refund will be made out of payments for extra prints of the Plans. Full refund of deposit will be made out of payments for extra copies of the Specifications.

All such refunds will be made only upon return of the documents within 10 days after the opening of proposals.

STATE HIGHWAY DEPARTMENT
J. Gordon Smith, Chairman
W. W. Mack, Director
Delaware Crossing Division
Wilmington, Delaware
April 17, 1950

OFFICIAL PROPOSALS

Bids: May 10, 1950 (7043)

State Road Work

NOTICE TO CONTRACTORS. STATE DEPARTMENT OF PUBLIC WORKS, ALBANY, N. Y. Pursuant to the provisions of Highway Law, as amended, and special provisions for projects financed with federal and State funds, sealed proposals will be received until ten-thirty o'clock A.M., advanced Standard time which is nine-thirty o'clock A.M., eastern standard time on Wednesday, May 10, 1950 by Henry A. Cohen, Director, Bureau of Contracts & Accounts, 18th Floor, The Governor Alfred E. Smith State office Building, Albany, N. Y., for the following projects. Maps, plans, specifications and proposal forms may be seen and obtained at the office of the State Department of Public Works, Bureau of Contracts & Accounts, Albany, N. Y., and at the office of the District Engineers noted below, and may also be seen at the office of the State Department of Public Works, 270 Broadway, New York City.

The deposit for plans and proposal forms for each contract containing 1 to 15 sheets is $5.00; 16 to 20 sheets, $10.00; 21 to 50 sheets, $25.00; 51 to 100 sheets, $50.00; over 100 sheets, $100.00. A refund will be made in full to bidders for the return of one set in good condition within 30 days of award or rejection of bids; refund for all other sets in good condition, similar period, will be 50% of deposit.

County	Contract No.	Name	Miles	Type	Deposit	Est. Cost of Work
		DISTRICT No. 3				
		G. L. Norrie, Dist. Engr., 455 Broadway, Albany, N. Y.				
Essex	FASS 56-1	Lake Placid-Saranac Rd., Pt. 1 & 2 Rd. Proj. 9045	4.44	R. S. Re-Treat Graded Gravel	$10.000 Plans $5	$124,000
Saratoga	RC 50-15	Ballston, Lake Bldg. 7625, 1 & 2 & 3 Pt. 2, 3 & 4 Bldg. 5281, Ballston Lake, Pt. 2, 3, 4 & 5	3.04	Asph. Conc. Pvt. 20' Wide = 1.92 sq Misc. Work = 0.92 sq	$15,000 Plans $10	$270,000
		DISTRICT No. 4				
		Wm. Rosevear, Dist. Engr., 301 E. Water St., Syracuse, N. Y.				
Oswego	FARC 50-11	Mexico-Sandy Creek, Pt. 1 & 2 Pt. 1, 2 & 3 Bldg. 5221, Pt. 1 & 2 Proj. 3253 Proj. & 3254	15.27	Asph. Conc. Type 1A, Opt.	$45,000 Plans $25	$1,755,000
Oswego	FASSH 55-5	New Haven-Texas, Pt. 1, 2 & 3 Proj. 5203.2	5.50	9' Con. Conc. Pave. 18' Wide, Reinf. Conc. Slab Br. 26' Span	$12,000 Plans $10	$560,000
		DISTRICT No. 4				
		A. R. Mattoon, Dist. Engr., Bridge Canal Terminal, Rochester, N. Y.				
Genesee	FASSH 56-6	Elba-Byron, Pt. 3 Proj. 5253.2	0.87	Rf. Mac. Opt. Rf. Mac. I-Beam, 1 Span 33.9½'	$6,000 Plans $10	$108,000
		DISTRICT No. 6				
		H. F. Becker, Dist. Engr., 40 West Main St., Bonnell, N. Y.				
Schuyler	FARC 50-14	Montour Falls, S. H. 5190 & Proj. 1479	0.63	Asph. Conc. Type 1A, Opt. 1 Span 1 I-Beam = 22' Span Viaduct $87.80	$18,000 Plans $10	$308,000
Steuben	FARC 50-12	Hammondsport-Kanona, S. H. 8-36 & 8202, Wayne-Keuka, Keuka Pave. Var., Pt. 1, S. H. 1179 & Proj. 1426-A	5.36	Asph. Conc. Type 1A, Opt. = 8.26 Mi. Misc. Work = 0.10 Mi.	$65,000 Plans $15	$1,213,000
Tioga	EC 50-13	Richford-Center Lisle, Pt. 1, 2, 3 & 5 S. H. 842	5.00	Rf. Mac. Opt. Rf. Mac. = 5.00 Mi. Misc. Work = 0.01 Mi.	$16,000 Plans $15	$256,000
		DISTRICT No. 8				
		J. S. Bruce, Dist. Engr., Pleasant Valley Road, Poughkeepsie, N. Y.				
Ulster	RC 50-17	New Paltz-Plattekill, S. H. 8-40 & 872	4.00	Asph. Conc., Type 1A, Opt.	$5,200 Plans $10	$84,000
		DISTRICT No. 10				
		J. J. Darcy, Dist. Engr., Montauk Hwy. at Little E. Neck Road, Babylon, L. I., N. Y.				
Bronx	FAMDE 50-4	Major Deegan Expressway I-29 Cont. 4A, Van Cortlandt Park Inter-Change, Bronx-Yonkers Proj. 1982.1		Grading & Misc. Work	$25,000 Plans $10	$441,000

Proposal for each contract must be submitted on a separate sealed envelope with the name and location of the contract plainly endorsed on the outside of the envelope. Each proposal must be accompanied by a check, draft or certified check, payable to the order of State of New York, Commissioner of Taxation & Finance, for the sum specified in the advertisement and the amount of the security and deposit of the bidding check. The execution of the contract must conform to the provisions of the Highway Law, as set forth in "Instructions to Bidders." Where optional types are permitted on contracts with federal funds, bidders must state in the space provided in the proposal the exact designation of the optional type upon which the proposal is predicated. The right is reserved to reject any or all bids.

H. G. TALLAMY
Supt. of Public Works

(Continued on page 99)

OFFICIAL PROPOSALS
(Continued from opposite page)

Bids: May 31, 1950 (699)

Sewage Treatment Plant, Intercepting and Outlet Sewers

THE LINDEN ROSELLE SEWERAGE AUTHORITY
LINDEN, N. J.

1. Sealed proposals for the construction of the herein described contracts of a pollution abatement project in the City of Linden, New Jersey, will be received by the Linden Roselle Sewerage Authority in the Council Chambers, City Hall, Linden, until 11:30 A.M. on Wednesday, May 31, 1950, and then publicly opened and read immediately thereafter.

2. The work will consist of providing all labor, materials, equipment and incidentals required for the construction of the following:

Contract I—Intercepting and outfall sewer (Approx. 7400 L.F. of 36-inch R.C. Pipe, 1500 L.F. of 18-inch R.C. Pipe, 3500 L.F. of 60-inch R.C. Pipe and appurtenant structures). *Contract II—Plant Outlet Conduit & Sludge Force Main* (Approx. 2880 L.F. of concrete flume, 26,000 L.F. timber piling, 3860 L.F. 24-inch R.C. Pipe and appurtenant structures). *Contract III—Sewage Treatment Plant—General Construction* (Primary treatment works including pumping station and including approx. 32,000 cu. yds. excavation, 5500 cu. yds. of concrete, 2850 tons of cast iron pipe and fittings, 1500 L.F. timber piling, valves, sluice gates, mechanical equipment and appurtenances). *Contract IV—Sewage Treatment Plant Superstructures* (Six brick and concrete buildings, approximate volume 170,000 cu. ft.). *Contract VII—Structural Steel* (For plant buildings. Approx. 80 tons). *Contract VIII—Heating and Ventilating* (For plant buildings). *Contract IX—Plumbing Work* (For plant buildings). *Contract X—Electrical Work* (At sewage treatment plant).

3. Plans, specifications, bidding and contract documents may be examined at the office of the Consulting Engineers, Alvord, Burdick & Howson, 20 North Wacker Drive, Chicago 6, Ill., and at the office of Ammann & Whitney, 11 Broadway, New York 4, N. Y., and may be obtained upon the following deposits per set:

Contract I, Intercepting and Outfall Sewer, $50.00; Contract II, Plant Outlet Conduit and Force Main, $25.00; Contract V, Sewage Treatment Plant—General Construction, $15.00; Contract VI, Sewage Treatment Plant—Superstructures, $25.00; Contract VII, Sewage Treatment Plant—Structural Steel, $10.00; Contract VIII—Sewage Treatment Plant, Heating & Ventilating, $20.00; Contract IX—Sewage Treatment Plant—Plumbing Work, $20.00; Contract X—Sewage Treatment Plant—Electrical Work, $20.00.

Full refund will be made to bidders for return of one (1) set in good condition, within two weeks after closing date for receipt of bids. Refund to unsuccessful bidders, in good condition, within the same period, will be fifty percent (50%) of the deposit. Plan deposit checks should be made payable to order of Alvord, Burdick & Howson.

4. All proposals must be on the form furnished by the Authority.

5. All bids must be accompanied by a certified check or acceptable bidder bond in the amount of ten (10%) per cent of the amount of the bid, made payable to The Linden Roselle Sewerage Authority. Said checks or bonds to be returned to the unsuccessful bidders not later than sixty (60) days after opening of bids.

6. The successful bidder in each of the several contracts will be required to furnish a Performance Bond conditioned upon the faithful performance of the contract and upon the payment of all persons supplying labor and furnishing materials on the respective contracts.

7. No bidder may withdraw his bid within sixty (60) days after closing date for receipt of bids.

8. The Authority reserves the right to reject any or all bids and to waive any informality in the bid.

BY ORDER OF THE ACTING SECRETARY OF THE LINDEN ROSELLE SEWERAGE AUTHORITY
Charles H. Grier

DATED: April 27, 1950

READ THE OFFICIAL PROPOSAL COLUMNS OF ENGINEERING NEWS-RECORD THIS WEEK AND EVERY WEEK

SEARCHLIGHT SECTION

Classified Advertising

EMPLOYMENT: BUSINESS: **"OPPORTUNITIES"** :EQUIPMENT :USED OR RESALE

UNDISPLAYED RATE

(Not available for equipment advertising)

$1.25 a Line, minimum 4 lines. To figure advance payment count 5 average words as a line.
INDIVIDUAL EMPLOYMENT WANTED undisplayed advertising rate is one-half of above rate, payable in advance.
Box Numbers in care of our New York, Chicago and San Francisco offices count as one additional line.
Replies are forwarded each day as received at each of the offices mentioned without additional charge.
Discount of 10% is allowed if full payment is made in advance for 4 consecutive insertions.

DISPLAYED RATE

The advertising rate is $11.50 per inch for all advertising appearing on other than a contract basis. Contract rate quoted on request.
An advertising inch is measured ⅞ inch vertically on one col., 3 cols. = 10 inches to a page. E.N.R.

Now advertisements received by May 8th will appear in the May 18th issue.

ESTIMATOR—Wanted

Growing concern, doing building, sewer, road and general construction in Ohio. Experienced man preferred, permanent position. State qualifications, exp., age, former employer, references, salary expected, first letter.

P-6463, Engineering News-Record, 330 W. 42nd St., New York 18, N. Y.

REPLIES should be addressed to office nearest you
NEW YORK, 330 W. 42nd St. (18)
CHICAGO, 520 N. Michigan Ave. (11)
SAN FRANCISCO, 68 Post St. (4)

CIVIL SERVICE

THOROUGHLY EXPERIENCED construction Superintendent with satisfactory background in prison construction and handling prison labor. Protestant, engineering degree (Illinois) and attorney's license. Salary open. Furnish complete resume of experience, education, references and salary required. P-6446, Engineering News-Record.

POSITIONS VACANT

WANTED: ESTIMATOR on reinforcing bars, sheet steel and steel windows. Must be experienced and capable of handling entire estimate. Also Project Engineer who can direct field and sales people; must have estimating experience; salary expected. Phone, write or wire. Box P-6453, Engineering News-Record.

CONTRACTORS' ENGINEER-Superintendent for heavy marine construction. Must be experienced in pile driving, dredging, concrete work, building bulkheads, etc. Location New York City. Give complete resume of experience with references and salary expected in first letter. Address Box P-6454, Engineering News-Record.

HEATING MECHANICAL Engineer. Exp. with A.S.H.V.E. Guide in building alterations. Length of service, salary open. Give full particulars in first letter. Address application to M. Shook, Chief Engineer, The Morgan Cement Company, Hamilton, Kansas.

ESTIMATOR-TOOL Pittsburgh industrial contracting organization needs in first letter data to be submitted on basis preferences, record of earnings and salary expected. Write P-6414, Engineering News-Record.

MAID DRAFTSMEN and computer Long Island sewage works, 40-hour week, give sample of work and salary expected. P-6447, Engineering News-Record.

CIVIL ENGINEER, experienced in general engineering, heavy construction, in Texas. Must be willing to go anywhere. Salary open. Reply stating experience, age, family status, and salary desired. The Contractors, Box 1, Corpus Christi, Texas.

WANTED
PROJECT ENGINEERS
FIELD ENGINEERS

and inspection staff by large, long-established engineering organization for long term water development program in Texas and Oklahoma areas. Supervisory and inspection staff must be experienced on dams, powerhouses, water supply, and irrigation. Vacancies include resident engineers, layout engineers, concrete technicians, field accountants, surveyors, and inspectors. Resident engineers must be college graduates qualified by ample experience to take complete charge of engineering on large contract projects under Chief Engineer. Please submit completely detailed personal, education, and experience record and salary requirements with first letter. All replies strictly confidential.

P-6413, Engineering News-Record
520 N. Michigan Ave., Chicago 11, Ill.

ESTIMATOR

Experienced ENGINEER, familiar with Oil Refinery design and capable of estimating process equipment from flow diagrams.

Give full information, experience record and salary expected.

ARTHUR G. McKEE & CO.
2300 CHESTER AVE
CLEVELAND 1, OHIO

GRAVEL PLANT SUPERINTENDENT

Wanted for operating and managing portable and permanent plants in Indiana and Michigan. State experience, references and salary.

P-6206, Engineering News-Record
520 N. Michigan Ave., Chicago 11, Ill.

ENGINEER, LICENSED
in New York State
Also Sales Engineer

Experienced in bridge construction and alterations. Permanent position for right man. Reply stating experience to

P-6106, Engineering News-Record
330 W. 42nd Street, New York 18, N. Y.

Additional Employment Advertising on page 100

A Course of Instruction by Mail in

STRUCTURAL ENGINEERING

FOR FORTY YEARS our courses have helped thousands to better positions and to pass State Board Examinations.

Information sent without obligation. Write today.

WILSON ENGINEERING CORP.
College House Offices - Dept. E
Harvard Sq. Cambridge, Mass.

WANTED SUPERINTENDENT

For Sewage and Water line construction operating principally in Indiana. Write only for interview, giving experience in the above line of work, age, reference, salary expected.

P-6318, Engineering News-Record
520 N. Michigan Ave., Chicago 11, Ill.

ESTIMATOR
WANTED

In Phila., experienced in general heavy construction work. Give information on experience, salary, availability. Experience with contractors preferred.

P-6444, Engineering News-Record
330 W. 42nd St., New York 18, N. Y.

SURVEYOR WANTED

Top notch registered surveyor capable of assuming charge of highway and bridge surveys for consulting engineer in Pittsburgh. Good salary, working conditions, and permanency. Our employees know of this ad.

P-6461, Engineering News-Record
330 W. 42nd St., New York 18, N. Y.

CONSTRUCTION SUPERINTENDENT

Full charge experience on largest Class A buildings only.

Apply before May 12.

Rm. 305 State Bldg. 217 W. 1st St., L.A.

WANTED
CONSTRUCTION SUPERINTENDENT

For open caisson work. Write for interview, state age, experience, qualifications, reference and salary expected. Apply

P-6425, Engineering News-Record
330 W. 42nd St., New York 18, N. Y.

ESTIMATOR

Wanted by old established Pittsburgh firm of commercial and industrial contractors. Must have had experience with contractors engaged in similar work. State salary experience and when available. Splendid opportunity for advancement.

P-6499, Engineering News-Record
330 W. 42nd St., New York 18, N. Y.

for
DIRECT CONTACT
with the
MOST ACTIVE BUYERS
throughout the field of
ENGINEERING
CONSTRUCTION—

Use the
Searchlight Section
ENGINEERING NEWS-RECORD

POSITIONS WANTED

MECHANICAL SUPERINTENDENT. Twenty-five years experience with erection operation and maintenance of heavy industrial construction and mining equipment. Past six years on Latin American operations. Speaks Spanish fluently. Will go anywhere. Immediately available. PW-6418, Engineering News-Record

AMBITIOUS CHIEF Accountant, Controller. Twenty-five years with leading engineering and construction firms. Know corporate setups, finances and costs all types construction. Broad experience large joint venture and cost plus fixed fee projects. Employed but desire change, references and bond. Go anywhere. PW-6415, Engineering News-Record

GRADUATE CIVIL Engineer, 27, married, three years engineering experience with the U. S. Army Corps of Engineers. Desires job in east or middle west. Available August 1st. PW-6363, Engineering News-Record

SUPERINTENDENT CONSTRUCTION, 25 years broad experience, commercial, industrial or institutional projects. Engineer, go anywhere. Salary $6000 yr. PW-6467, Engineering News-Record

CIVIL ENGINEER, P.E. license. Age 36, 15 years experience in planning, designing, administration, consulting, and plant engineering. Desires association with Architect or Consulting Engineer, or responsible position with General Contractor. Interested in well paying opportunity with future. PW-6219, Engineering News-Record

CONSTRUCTION ENGINEER—Superintendent 24 years experience supervising and managing both large and small projects. Commercial, industrial and bridge construction, including process piping, electrical and conditioning, refrigeration, instrument and machinery installations. Thorough knowledge estimating, subcontracting, job supervision, scheduling and cost control. College graduate. PW-6476, Engineering News-Record

CIVIL ENGINEERING Graduate, 25, single. 2½ years experience with Consulting Sanitary Engineers. Construction work in midwest preferred. PW-6471, Engineering News-Record

STRUCTURAL DESIGNER, checker, college graduate, many years varied experience steel, reinforced concrete and shop details. $8 $100.00 week. Will travel. PW-6452, Engineering News-Record

CONSTRUCTION MGR. Gen'l Supt. Exp. includes all details of office heavy and light bldg. and allied units. 30 yrs exp. Salary $175.00/week. PW-6480, Engineering News-Record

AVAILABLE AT once. Graduate Mechanical Engineer, Texas A&M, 8 yrs. exp. executive in steel and textile manufacturing, 2 yrs. shop experience in food processing. Desires plant engr. job or supply of maint. R. W. Dallmer, 511 N. Vine St., Marshfield, Wisconsin. Phone 1229-R.

FAMILY MAN, 38, seeking fairly localized position of business opportunity. Consider anywhere U. S. 18 years varied experience in industrial and municipal engineering and construction. Experience includes such positions as engineer, superintendent, job engineer, job accountant, bid purchasing agent, inspector. Well versed in all phases of subcontracting. Presently employed 3½ years with one company in petroleum and chemical engineering and construction. PW-6495, Engineering News-Record

PART TIME WORK WANTED

ENGINEER SKILLED airp. designer. Know latest methods, costs and contracting practices. Let me serve your needs. Box 882, Philadelphia 5, Pa.

EXCAVATION WORK

Wanted for shovel, 2 bucklines, all grades and types of hard rock. Will take sub-contract or ratings basis. Anywhere in the United States or Canada. Give full particulars and lowest price in first letter. Write

IMPERIAL COAL & CONST. CO.
Box 346 Rupert, W. Va. Tel. 26 R 5

SUBMERGED PIPE LINE CONSTRUCTION
BOYCE COMPANY
Phone 3-2530 Clearwater, Fla.

Legal Notice

1. SEALED BIDS for the sale of
BOILERS AND STEAM POWERED
ELECTRIC GENERATING EQUIPMENT
WITH APPURTENANCES
will be received by the City of Coshocton, Ohio, at the office of the Director of Public Service in the City Hall, Coshocton, Ohio until
12 O'CLOCK, NOON,
EASTERN STANDARD TIME,
THURSDAY, MAY 25, 1950
and at that time and place will be publicly opened and read aloud.

2. The equipment which is no longer required, and is being offered for sale by the City of Coshocton, consists in general of the following boilers and generating equipment WHI appurtenances now located in the existing waterworks power plant of the City:

a. 2—each 150 H.P. Erie City water tube boilers with automatic stokers powered by 7.5 H.P. electric motors with one spare motor, 2—simplex steam powered feed water pumps, feed water regulator, Cochrane feed water heater, zeolite water softening unit.

b. 2—each 250 H.P. Skinner Engine Company universal Uniflow steam engines connected to 175 K.V.A. generators with exciters.

c. 1—Power and Light Switchboard with Voltage Regulator.

d. Steam Piping and miscellaneous other piping and conduits with wiring.

3. All bids shall be submitted in letter form to the said Director, shall be on the basis of the purchase by the bidder of the equipment as said equipment is now installed and shall include the removal of the equipment by the bidder from the existing power plant to the place of disposal by the bidder.

4. All bids shall be signed, shall state the prices for materials and labor separately, and shall be inclosed in a sealed envelope marked "Bid for Purchase and Removal of Existing Power Plant Equipment."

Each bid must contain the name of every person, firm or corporation interested in the same and shall be accompanied by a certified check on a solvent bank, in the amount of 50% of the bid, made payable to the City of Coshocton, Ohio, as a guaranty that if the bid is accepted a contract will be entered into. The remaining 50% of the purchase price shall be paid to the City prior to the removal of all of the equipment. Successful bidder shall furnish Public Liability and Property Damage insurance with limits satisfactory to the Director of Public Service, and Workmen's Compensation Insurance. Unsuccessful bidders' checks will be returned within 48 hours of the scheduled time for receipt of bids.

5. The City of Coshocton, Ohio reserves the right to reject any or all bids, to waive any irregularities in bidding, and to accept the highest and best bid.

By Order of the Director
of Public Service
City of Coshocton, Ohio
Russell W. Hanlon, Director

FOR PROMPT ANSWERS
to your business problems
use
The SEARCHLIGHT SECTIONS
(Classified Advertising)

American Machinist	Engineering News-Record
Aviation Week	Factory Management and Maintenance
Business Week	F. & M. J. Markets
Bus Transportation	Floor Covering Daily
Chemical Engineering	Food Industries
Coal Age	Nucleonics
Construction Methods	Operating Engineer
Electrical Construction and Maintenance	Power
Electrical Merchandising	Product Engineering
Electrical World	Textile World
Electronics	Welding Engineer
Engineering and Mining Journal	

For advertising rates or other information address

Classified Advertising Division
McGRAW-HILL PUBLISHING CO., INC.
New York 18, N. Y.

USED EQUIPMENT

AVAILABLE FOR QUICK DELIVERY

New—**MARION**, 20 ton Motor Crane, 80' folding boom, 30' lib, BUDA gas engine powered.

HUGHES-KEENAN Rustabout CRANE Model MC1R with 16' boom mounted on International Harvester TD-14 DIESEL CRAWLER TRACTOR. In fair condition.

New—**INTERNATIONAL-HARVESTER** SUPER —A WHEEL TRACTOR with OTTOWA LOADER.
Bargain priced to move.

LORAIN, Model TL-20 CRAWLER, powered by WAUKESHA gas engine, 30' boom, clamshell equipment and lifting crane equipment. Made in 1948. In excellent condition.

INGERSOLL-RAND, Model 500, 2 stage Air compressor. WAUKESHA gas engine, clutch, electric starter, 4 solid rubber tires. New in 1939, good condition.

P & H Model 600, 1¼ yard CRAWLER Shovel powered by gas engine.
This is an outstanding "BUY"

New—No. 3 and No. 5 DUREX SAW TABLES with gasoline power.
Specially priced for quick disposal.

ALLIS-CHALMERS, Model HD-7 TRACTOR, 63" tread, canopy, starter, Gar Wood hydraulic bulldozer. Mfg. in 1947. In good condition.

ALLIS-CHALMERS, Model HD-5 Tracto-Shovel, Hydraulically operated bucket, starter, cab, 13" shoes. In good condition.

BUCYRUS-ERIE, Model TD-9 DOZER SHOVEL, Backfiller blade, 7 CW Bucket. 1946. Very good condition.

INTERNATIONAL HARVESTER, Model TD-14, 74" tread, standard operating attachments, B-E hydraulic bulldozer. New Track shoes. Mfg. in 1945. In very good condition.

INTERNATIONAL-HARVESTER, Model TD-18, 74" tread, with electric starter and lights, standard equipment and Isaacson hydraulic bulldozer. New in 1947. In good condition.

PUMPCRETE, DOUBLE, Model 180, powered by WAUKESHA, 8 cyl. engine with remixer powered by Le Roi gas engine. Few fittings, no pipe. On skids. Made in 1939. In good condition.

HOUGH, Model HLD Payloader, Hydraulic bucket control and backfiller blade. New in 1948. In excellent condition.

HOUGH HLA PAYLOADER, hydraulic bucket control. New in 1947. Excellent condition.

EXPORT SERVICE — SUBJECT TO PRIOR SALE — IMMEDIATE DELIVERY

Distributors of Thew-Lorain Cranes & Shovels—International Harvester Tractors—Chain Belt "Rex" Equipment—Barber-Greene Bituminous & Material Handling equipment—Adams Graders—Hough Pay-loaders and others.

EHRBAR

SINCE 1903

UNION, N. J. Unionville 2-7400 | BROOKLYN, N. Y. Evergreen 3-5000 | WESTBURY, L. I. Westbury 7-1990

FOR SALE

200 ton Hot Mix Asphalt Plant.

100 ton self propelled derrick scow.

30 ton electric gantry cranes.

Diesel Locomotive Cranes, 30 ton cap.

100 ton cap. pneumatic tired roller.

Scotch Marine 50 h.p. boiler.

2½ yd., P&H dragline, 120' boom.

6 yd. page dragline, walker, diesel power.

STONE the CRANE MAN

306 Architects Bldg. Detroit 1, Mich.

OWNER SALE — EQUIPMENT

Tank	(Rubber Lined)	10'6" dia. x 18'9¼"
Recuperators	(Coltan-Lang)	10' dia. x 14'11"
Bucket Wheel Feeders		36" & 54"
Mixing Tanks	(U Shaped)	10' x 8' x 30'
		10' x 8' x 12'
Turbovane Fan	(Strutevant # 135)	75,000 C.F.M.

ATTRACTIVE PRICES

Many other items ● Partial listing available

MILL & QUARRY EQUIPMENT COMPANY

Phone 5-7741 Baton Rouge, Louisiana P. O. Box 1486

STORAGE BATTERIES FOR SALE

24—Exide locomotive type TLM27 60 cells 120 volts, new in 1948 49; some never used. New price $6200 ea. Will sell for $3400.00 ea. with box, guaranteed.

LYNN ENGINEERING CO.

510 Russ Bldg., San Francisco, Calif. Phone GA 1845.

ATLAS DIESEL ENGINE

Used, Model SEN668, 5 cylinders 9" Bore x 10½" Stroke, 200 H.P. at 514 R.P.M. with Air Compressor. Starter and Compressor excellent condition, located at Teterboro, N. J.

EN-6330, Engineering News-Record, 330 W. 42nd St., New York 18, N. Y.

TOURNADOZER

FOR SALE—1 "Tournadozer", latest model, only used 100 hrs., practically new. Reason for sale—going out of business. This new and speedy Bulldozer is a buy at $13,000.

EN-6158, Engineering News-Record, 330 W. 42nd St., New York 18, N. Y.

GRADER & ROLLER

FOR SALE

Allis Chalmers Model AD Tandem tires, fully equipped, diesel.

Huber 5 to 8 ton, Tandem, hydraulic steering, gas.

Both in excellent condition and attractive price.

LOCATED IN OUR YARD.

HODGE & HAMMOND, INC.

1162 Grinnell Place, New York, 59, N. Y. Dayton 9-5300

Four Cat D. W. 10 with Laplante Choate Scrapers manufactured in 1945 in good running condition and priced right.

AIR COMPRESSOR RENTAL CO.

19615 NOTTINGHAM RD. CLEVELAND

KENMORE 1-8000

FOR SALE

1 1947 TD-9 International Dozer with Bucyrus-Erie Hydraulic Blade. Excellent Condition.

1 1946 TD-18 International Dozer with Heil Cable Controlled "Trailbuilder" Angle Blade. Very good condition.

1 1949 TD-24 International Dozer with Bucyrus-Erie cable controlled "Trailbuilder" Angle Blade. This machine is brand new, it has never been used.

1 1936 P & H ½ yd. Truck Crane, Model 150, 50' boom, Model 150 Clamshell bucket attachment. Very good Condition.

1 1941 P & H Gas Shovel, Model 255A, Crawler Type.

1 1948 ½ Ton Ford Pickup, Excellent Condition.

1 1948 ½ Ton Ford Pickup, Excellent Condition.

SORANNO CONSTRUCTION CO.

Morristown, N. J.

FOR SALE

ONE (1) 34 E DUAL DRUM KOEHRING PAVER

New, Never Used. Sacrifice price.

ELWOOD M. JENKS

Box 345 Clarksburg, W. Va.

FOR RENT

20-10 TON TO 25 TON CAPACITY

TRUCK CRANES

SECTIONAL BOOM LENGTHS TO 130 FEET

LIMA & P & H CRAWLER CRANES

30 TON TO 50 TON CAPACITY

SECTIONAL BOOM LENGTHS TO 175 FEET

THE ROGER SHERMAN TRANSFER CO.
EAST HARTFORD, CONN.

Branches: SPRINGFIELD, MASS. NEW HAVEN, CONN. ALBANY, N. Y.

U. S. AIR CORPS TYPE
NEW, SAFER, SHOCK RESISTANT

SUN GLASSES

Reduce Eyestrain From Glare & Harmful Rays

Cool green meniscus curved lenses in highly polished lens of nickalac with gold plated frame, pearling and bevel bar and bow pads. Made to meet U. S. Govt. specifications. Complete with case.

Reg. $10.00 Quality
$2.25 P. Post Paid
2 For $4.00



MAKE QUICK ACCURATE SIGHTS
•
NEW IMPROVED HAND

SIGHTING LEVEL

COMP. WITH U. S. ARMY PLASTIC POUCH

Compact, handy to use. Needed when laying drains, pipe lines, foundations, grading and determining depressions or elevations.

SPECIAL LOW PRICE $1.85
SHIP. CHG. 15c EXTRA EACH

BE SAFE—BE SURE ON LAND OR SEA
Brand New U. S. Navy

POCKET COMPASS

DEPENDABLE - ACCURATE
Has Many Features Not Found in Compasses Many Times This Price.

A fine precision compass designed for hard usage. Has water tight transparent plastic case and luminous dial marked in 360 degrees. Quarter reed.

Regular $10.00 Value
$3.00 P. POST PAID

J. JACOB SHANNON & CO.
214 N. 22nd St. Phila. 3, Pa.
The Oldest Equipment House in Phila.

FOR SALE

New and Guaranteed Used STEEL TANKS, Welded—Bolted—Riveted. For high pressure and ordinary storage: up to 74,000 barrel capacity.
200 open and closed White Oak and Cypress WOOD TANKS, approx. 10' dia., from 8' to 18' high, complete with round hoops and lugs.
Approx. 300 ton of steel SHEETS 3/16"—1/4" and 5/16".
New and Guaranteed Used Steel PIPE and TUBING up to 36" in diameter. Large stocks carried everywhere for IMMEDIATE SHIPMENT.

Your inquiry will be appreciated

A. GREENSPON PIPE CO., INC.
The Business Is 3 Years
3615 Olive St. St. Louis 8, Mo.
LUcas 5651

FOR QUICK SALE

5—Super C Turnapulls with L. P. Scrapers, 15 cu. yd.
2—Super C Turnapulls with 210AW Tournatrailers
1—210AW Tournatrailer unit only

Location — Pennsylvania. Generally good condition. Entire lot offered at very attractive figure.

FS-6016, Engineering News-Record
330 W. 42nd St., New York 18, N. Y.

GRADERS

Adams 511, Caterpillar, Austin Western 99M
Truck Cranes, Tractors

UNITED MOTOR EQUIPMENT
914 Spring St. U. S. #1 Elizabeth, N. J.

STRUCTURAL BEAMS

70 Pcs. 18" x 24" lg.—24 Pcs. 30" x 32" lg.—7 Pcs. 36" x 35' lg.—6 Pcs. 36" x 40' lg. and 6 Pcs. 36" x 54' lg. Also used structural timbers for sale—Phone or write

JUTTON-KELLY COMPANY
13240 Alber Avenue Dearborn, Michigan

LIFTING BLOCKS

75—Single, Triple, and Quad. 18" sheave blocks, new, 1" cable, 2" pin, forked and swivel—shackle. Price: $15.00, $36.00, and $48.00.

R. A. PARKINSON & SON
519 N. Delaware Ave. Philadelphia 23, Pa.

FOR SALE

BUCKETS

Distributors for Pettibone Mulliken Corp.
1—Gradall 10A Truck Crane 10 wheel
1—Browning Truck Crane 15" magnet
1—Kaiss Creeper Loader Model 22C
1—Kaiss Creeper Loader Model 55

VAN HOUTEN MACHINERY CO.
908 Van Houten Ave. Clifton, N. J.

FOR RENT

Modern Caterpillar Mounted CRANE, CLAMSHELL & DRAGLINES

40 to 60 ton Capacity

CLEMENS CONSTRUCTION COMPANY
P. O. Box 266 West New York, N. J.
PEnna 6-0655

FOR SALE

IN CORPUS CHRISTI, TEXAS

Insulated 12' x 8' x 8' Tanks, 3/16" Steel, Tarred
P & H Model 1055 LC Crane Crawler Mounted 100 ft. boom and 25 ft. gib 250 HP Buda Diesel A-1 condition

HALLIBURTON PORTLAND CEMENT COMPANY
P. O. BOX 1200 CORPUS CHRISTI, TEXAS

SALE OR RENT—MOTOR CRANE

Michigan TLDT20, 95' Boom, 15' Jib. Like New. Used on Steel Erection Work only. $13,500.00. FOB Abilene, Texas.

Bill B. Hendricks—Steel Erection
2617 East First St. Ft. Worth, Texas
ED 8102

FOR SALE

ONE JAQUES EARTH BORING MACHINE

Model HM with Buffalo-Springfield 6 MC 6 cyl. engine, mounted on Mack 6 x 6 truck. Also equipped with Pacific 6" Deep Well Jetting Rig. Has been used to drill 6" wells to depths of 300'. Machine in excellent condition. Available September 15th.

MIDWEST FENCE CONSTRUCTION CO.
1252 S. Vandeventer Ave. St. Louis 10, Mo.

RENT WITH PURCHASE OPTION PAVING EQUIPMENT EXCAVATING EQUIPMENT

Forms, Bins, Finishers, Spreaders, Pavers, etc. etc. Tournapulls—Scrapers—Tournadozers, etc.

DRAVO-DOYLE COMPANY
PITTSBURGH, PA.

CATERPILLAR D-7

Latest model serial 3T4235 with starter, canopy top and LaPlant-Choate hydraulic bulldozer. Excellent condition, with new tracks, idlers, sprockets, rollers. For sale or rent (also with option).

BENDIX MACHINERY CO., INC.
101 Broadway New York 13 Tel. Canal 6-3651

INSTRUMENT REPAIR BY CRAFTSMEN

Our craftsmen have a completely equipped department fully able to accommodate the repair of all makes of transits, levels and measuring tape. Work includes thorough overhaul, cleaning, oiling and adjustment.

Precision work guaranteed.

DAVID WHITE COMPANY
317 W. Court St., Milwaukee 12, Wis.

INSTRUMENTS FOR RENT

We rent transits and levels on a monthly or yearly basis. Reasonable rates. All instruments are fully guaranteed in first class working order.

DAVID WHITE COMPANY
317 W. Court St. • Milwaukee 12, Wis.

PUMPCRETES

Rebuilt Current Models

For Sale or Rent

CONCRETE EQUIPMENT COMPANY
312 E. Wisconsin Ave.
Milwaukee 2, Wis.

PILING

• STRUCTURAL STEEL SHAPES •

New and Used—Immediate Delivery

At present our inventory of steel shapes and forms includes a full line of both new and used steel especially for heavy construction work. 4" I beam to 36" Girder Beam.

BEARING PILE SECTION

Stock list on request. Write, wire or phone.

HY DRACHMAN STEEL CORPORATION

Warehouse
14-23 34th Ave., Astoria L. I., N. Y.
Astoria 8-8023; 8-4484-5

Sales Office
563 E. Tremont Ave., New York City, N. Y.
Cypress 9-5440-1

We do a Nation-Wide business in

STEEL SHEET PILING

New & Used — Rented & Sold

100 pcs. 60 ft. Beth. AP3-Buffalo
212 pcs. 50 & 40 ft. Carn. M115-Chicago
136 pcs. 40 & 30 ft. Carn. M115-Kentucky
51 pcs. 35-29 ft. Beth. SP4-South Car.
800 pcs. 30-25 ft. Carn. M112-Minn.

Other lengths & sections at various locations

All sizes Vulcan & McKiernan Pile Hammers & Extractors for Rent and Sale—Shop Rebuilt

Regardless of location of your job, wire or write

MISSISSIPPI VALLEY EQUIPMENT CO.
509 Locust St., St. Louis, Mo.
"WE BUY STEEL PILING FOR CASH"



$1.50 Each
P. Post 75¢ within 300 miles of Phila.

U. S. ARMY **5 GAL. JEEP CANS**

COMP. WITH NEW 15" DETACHABLE FLEXIBLE SPOUT

A unused can for fuel and oil storage for field equipment. Can is used but in good condition. Spout is new with breather tool and hose tube.

12 Cans	$ 15.00
48 Cans	$ 54.00
100 Cans	$100.00

F. O. B. Phila.

Rated Firms Open Account—Others Send Check

J. JACOB SHANNON & CO.
214 N. 22nd St., Phila. 3, Pa.
The Oldest Equipment House in Philadelphia

SHEET PILING

Location—Birmingham, Ala.

163 Pcs. SP6a 14 to 17 feet
60 Pcs. SP6A 11 to 14 feet
346 Pcs. SP7A 14 to 17 feet
60 Pcs. SP7A 11 to 14 feet
21 SP6A Corners
62 SP7A Corners

FRAZIER-DAVIS CONSTRUCTION COMPANY
1319 Macklind Ave. St. Louis, Mo.

"CAST IRON PIPE FOR SALE"

4's Lengths 16" x 18' Super DeLavaud Bell & Spigot approximate weight per Joint 2260 lb.
10's Lengths 12" x 18' Super DeLavaud Bell & Spigot approximate weight per Joint 1120 lb.
2's Lengths 10" x 18' Super DeLavaud Bell & Spigot approximate weight per Joint 1010 lb.
12's Lengths 8" x 18' Super DeLavaud Bell & Spigot approximate weight per Joint 755 lb.
Also 36 Lengths 12" x 16' Sand Spun MONO Bell & Spigot approximate weight per Joint 1180 lb.

All of the above pipe is in good condition and ready for use. While it has been laid in, it was not used as the plant was dismantled before completion. Send inquiries to

LOUISIANA IRON & SUPPLY CO.
Shreveport, La.

OR

RANDALL ZOGG SUPPLY CO.
Owensboro, Ky.

RAILS-TIES

TRACK ACCESSORIES

FOR SALE OR RENT

ALL LATE MODELS

1—N.W. Shovel 2½ c.y. Model 80D
1—N.W. Shovel 1½ c. y. Model 6
5—DW 10's—3000 hrs. or less
1—Caterpillar D8 Angledozer
1—Caterpillar D7 Bulldozer

Williams Construction Co.
Box 145, Middle River
Baltimore 20, Md.
Phone—Essex 1310

For Sale or Rent

STEEL SHEET PILING

Bethlehem SP-4 section

First class redrivable

102 Pcs. 42 to 39 ft
249 Pcs. 37 to 34 ft
932 Pcs. 33 to 30 ft
575 Pcs. 29 to 26 ft
586 Pcs. 24 to 20 ft

Also Tee Pieces

Immediate shipment from southeast

MISSISSIPPI VALLEY EQUIPMENT CO.
509 Locust St. St. Louis, Mo.

Need RAILS?

You'll get them "Faster From Foster"

Largest stocks in U.S.
NEW & RELAYING RAILS
Track Tools and Accessories

Foster guarantees material satisfactory or returnable freight both ways, our expense.

✔PIPE ✔PILING ✔WIRE ROPE & SLINGS

L. B. FOSTER CO

Pittsburgh 30, Pa. — New York 7, N.Y.
Chicago 4, Ill. — Houston 2, Tex.

FOR SALE

1—1½ Cu. Yd. Amsco Shovel bucket, new, complete with teeth and sheave for P & H Shovel. Price $1450.00

Phone Williams 1-8600
Hillsgrove, Rhode Island

INTERLOCKING STEEL SHEET PILING

All lengths & strengths RENT or BUY

L. B. FOSTER CO

Pittsburgh 30; New York 7; Chicago 4; Houston 2

FOR SALE

1—Robinson Air Activated Conveyor Tank

WAMIX, INC.
4839 Bengal Street, Dallas, Texas

FOR SALE OR RENT

STEEL SHEET PILING

100 PCS. BETH. AP3—60 Ft. with cut
500 PCS. BETH. DP2—70—60—50—20 Ft.
2146 PCS. BETH. SP6A—20 to 40 Ft.
500 PCS. BETH. DP1—27, 30 & 45 Ft.
2000 PCS. BETH. SP4—20 to 40 Ft.
9 McK. T. HAMMERS NOS. 10B1, 9B1, 7 & 5
2 McK. T. & 400A VULCAN EXTRACTORS

STANHOPE, 60 E. 42nd St., N. Y., N. Y.

New **RAILS** Relay

Track Accessories — Steel Storage Tanks

W. H. DYER CO., INC.
1859-X Railway Exchange Bldg., St. Louis, Mo.
Stocks at Various Points

New Guaranteed . . . 60 TON

HYDRAULIC JACKS

Navy Surplus
ILLUSTRATED CATALOG 60% off

BERKELEY DISTRIBUTORS INC.
10 JOHNSON AVE. HACKENSACK, N. J.

BRAND NEW

IMPORTED
44" SWEDISH STEEL CHAIN SAW
28 FLEXIBLE LINKS
Coils into metal & leather case
Complete with detachable handles

9/16 Tooth

A versatile compact saw for any construction project, designed for one man operation. Manufactured in Sweden of best quality Swedish steel. Lightweight and efficient. Does the work of a two man saw, will cut in space impossible for regular saw or axe to be used.

HAS THOUSANDS OF USES, CUT—
- TIMBERS
- LOGS
- ROOTS
- TREES
- PILINGS
- RAFTERS

REG. $30.00 VALUE
NOW ONLY **$5.50** 2 for $10.00
P. POST PAID

Rated Firms Open Account—Others Send Check

1744 Shannon

I. JACOB SHANNON & CO.
214 NORTH 22nd ST., PHILA., 3, PA.
"THE OLDEST EQUIPMENT HOUSE IN PHILADELPHIA"

CONTRACTORS SURPLUS
SALE OR RENT

2—Lima Crane-Shovels M-602 & 750—130' Boom & 1½ Cat D-13000 and Cummins NHIS Engines.
2—Lima Shovel Attach. 1½ & 1¾ Yd.—M-602 & 750.
1—75' Crane Boom Fits Lima 602-750-802.
1—55' Crane Boom Fits Lima 602-750-802.
1—2½ Cu. Yd. Page Dragline Bucket.
1—10S Jaeger Concrete Mixer W Power Skip.
1—2 Bag C M C Plaster & Mortar Mixer.
1—Sets Drum Lagging Fits Northwest M 6-7BD-80D at 75 set.

C. V. CASTALDO CONSTRUCTION CORP.
3170 JEROME AVE.
BRONX 58, N. Y. SEDGWICK 3-5748

FOR SALE
PONTOON/CELLS
Eighty 5'x5'x7' Navy pontoon cells in good condition for assembling into barges. Located Selinsgrove, Pennsylvania.
A. S. WIKSTROM, INC.
Skaneateles, N. Y.

FOR SALE
Koehring Model 803, 2 cu. yd., combination CRANE, DRAGLINE and CLAMSHELL.
GANTRY OR CAT. mounting available.
Reply
BX-7460, Engineering News-Record
330 W. 42nd St., New York 18, N. Y.

WANTED

WANTED
HYSTER WINCHES
Towing or Worm Drive
Models D8N—D7N—D6N and D4N
JOHN FABICK TRACTOR CO.
3100 Gravois St. Louis 18, Mo.
Phone Laclede 8900, L D—5

WANTED
#7 McKIERNAN-TERRY PILE HAMMER
GOOD CONDITION
State best price, age, serial and location
W-6893, Engineering News-Record
330 W. 42nd St., New York 18, N. Y.

WANTED
STEAM HAMMER
A 9B2 or 9B3 McKiernan
A. S. WIKSTROM, INC.
SKANEATELES, N. Y.

WANTED
TO RENT OR BUY
500 to 800 Yard Dump Scow
Within Reasonable Towing Distance of Albany
W-6891, Engineering News-Record
330 W. 42nd St., New York 18, N. Y.

WANTED TO BUY
Good Used 3½ Cu. Yd.
SHOVEL BUCKET
to Work on Model 1201 Lima
McGEORGE CONTRACTING CO., INC.
P. O. Box 995 Pine Bluff, Arkansas

WE BUY OR SELL
All Types of
TRENCHING MACHINES
AIR COMPRESSOR RENTAL CO.
19615 NOTTINGHAM RD. CLEVELAND
Kenmore 1-8000

WANTED
10-ton good used TANDEM
or 3-WHEEL ROLLER
gas or diesel
LENMAR CONSTRUCTION CO., INC.
Call HYacinth 7-1260 Brooklyn, N. Y.

TO HELP YOU . . .
find equipment you need
"Searchlight" Advertising

At Your Service

—for bringing business needs or "opportunities" to the attention of men associated in executive, management, sales and responsible technical, engineering and operating capacities with the industries served by the following McGraw-Hill publications:

The SEARCHLIGHT SECTIONS of

(Classified Advertising)

American Machinist
Aviation Week
Business Week
Bus Transportation
Chemical Engineering
Coal Age
Construction Methods
Electrical Construction & Maintenance
Electrical Merchandising
Electrical World
Electronics
Engineering and Mining Journal
Engineering News-Record
E. & M. J. Markets
Factory Management and Maintenance
Food Industries
Operating Engineer
Power
Product Engineering
Textile World
Welding Engineer

For advertising rates or other information address the

Classified Advertising Division

McGRAW-HILL PUBLISHING CO., Inc.
330 West 42nd Street
New York 18, N. Y.

WEISS STEEL CO., INC.
600 W. Jackson Blvd.
Chicago 6, Illinois

OFFERS
HOT ROLLED DEFORMED REINFORCING BARS INTERMEDIATE GRADE

85 tons ⅞" Rd. x 25'-30'
8 tons 1" Rd. x 25'-30'
16 tons 1¼" Rd. x 25'-30'
17 tons 1¼" Sq. x 25'-30'
18 tons 1¼" Sq. x 25'-30'

$69.00 net ton
f.o.b. Cleveland, Ohio

Phone CEntral 6-1939

TRACTORS

D7 series 47 cable BD. Excellent.
T9 gaso. hydraulic BD. Unused.
TD35 Hydraulic BD. Low price.

CRANES • TRENCHER • GRADER

Hanson crawler model 31 used 4 months any attachment. Guaranteed.
PSH ½ yd. on single axle truck. Rebuilt.
Cleveland 295 trencher. Rebuilt.
211 Caterpillar grader. Low price.

GENERAL EQUIPMENT CO.
133-18 227th St. Laurelton, L. I., N. Y.

PORTABLE OFFICES FOR CONTRACTORS

MOBILE FIELD OFFICES

Powered by General Motors Engines. Can be used for tool sheds, field laboratories, transportation, etc. Unit has 240 square feet of floor area.

Cheaper than offices constructed on location.

Immediate Delivery

Write for complete information.

FRAZIER-FENCIL CORP.
1323 MACKLIND AVE. ST. LOUIS 10, MO.

FOR SALE
ONE 75A LORAIN SHOVEL
1¼ yard dipper, 21' boom, 18' stick, 75 H.P. Waukesha gas engine, in good condition. Shovel Serial No. 4024 located and in operation near Whitlock, Tennessee.
KENTUCKY TENNESSEE CITY CO., INC.
MAYFIELD, KY.

FOR SALE
1 Austen Western Badger ½ yard Shovel, Serial No. 2598, with back hoe equipment. Two back hoe buckets 29" and 33". All in good condition. Call or write the
Lock Haven Construction Company
Lock Haven, Pa.

LORAIN MODEL 80
1¼ cy. Shovel and 80' Dragline Crane
D13000 Caterpillar Diesel engine
rebuilt—A1 condition
for sale or rent with option prompt delivery
BENDIX MACHINERY CO., INC.
101 Broadway, New York 13 Tel. Canal 6-5691

PROFESSIONAL SERVICES

Cards arranged by states, cities, names — **Additional cards on following pages**

Polk, Powell and Hendon
Engineers—Consultants
Harry H. Hendon
Hugh A. Powell
Water Supply, Sewers and Sewage Treatment, Plants, Steam and Hydro Electric Plants, Industrial Plants, Buildings, Reports, Valuations, Studies and Investigations, Supervision of Construction and Operation
620 Chamber of Commerce Bldg.
Birmingham 3, Ala.

Palmer and Baker, Inc.
Consulting Engineers
For Problems of Transportation
Subaqueous Vehicular Tunnels
Bridges
Tunnels
Grade Separations
Highways
Airports
Traffic Studies
Parking Problems
Waterfront & Harbor Structures
Mobile, Alabama

John S. Cotton
Consulting Engineer
Water Supply, Sewerage, Flood Control, Drainage, Power Projects, Industrial Plants, Subdivisions, Investigations, Reports, Valuations, Rates
28 Brookside Dr., San Anselmo, Calif.

Heron Engineering Co.
Consulting Mining, Industrial and Hydro Engineers
Dams, Plants, Irrigation, Water Supply, Power, Industrial, Subdivisions, Large Housing Developments, Airports, Drainage and Water Pipe Lines
2000 Arapahoe Street, Denver 15, Colorado
Carlsbad, New Mexico

Industrial Drilling and Boring Corp.
FOUNDATION BORINGS
GEOLOGICAL SURVEYS
P. O. Box 1264 — 1016 E. Adams St.
Jacksonville, Florida

Patchen & Zimmerman
Engineers
Consultation, Plans, Specifications, Supervision, Reports, Valuations, Water Supply and Treatment, Sewerage and Sewage Treatment, Water Supply and Treatment, Superintendence, Surveys, Reports
Dallas Love Airport
Dallas, Tex.

E. J. Albrecht Company
Engineers—Contractors
Steel, structural and power plants, dams, flood control projects, railroads, bridges, tunnels, locks and subways
2626 West 26th Street, Chicago 8

Alvord, Burdick & Howson
Charles H. Burdick
Leslie B. Howson — Donald H. Maxwell
Consulting Engineers
Water Works — Sewerage
Water Purification — Sewage Treatment
Flood Relief — Power Generation
Drainage — Appraisals
Engineers Club Bldg.
53 West Jackson Blvd., Chicago

Consoer, Townsend & Associates
Water Supply, Sewerage, Flood Control & Drainage, Bridges, Tunnels, Expressways, Parking, Power Plants, Appraisals, Reports, Traffic Studies, Airports
351 East Ohio St., Chicago 11, Illinois

De Leuw, Cather & Company
CONSULTING ENGINEERS
Transportation, Public Transit and Traffic Problems
Industrial Plants, Grade Separation, Railroads, Expressways, Power Plants, Municipal Works
150 North Wacker Drive
Chicago 6, Ill.
74 New Montgomery Street
San Francisco 5, Calif.

Greeley and Hansen
Engineers
Water Supply, Water Purification, Sewerage, Sewage Treatment, Flood Control, Drainage, Refuse Disposal
220 S. State Street, Chicago 4

Hazelet & Erdal
Consulting Engineers
Fixed and Movable Bridges, Designs, Supervision, Superstructures, Investigations, Industrial Buildings, Reports, Airports, Dams, Surveys
Monadnock Block, Chicago 4, Ill.
Dixie Terminal Bldg., Cincinnati 2, O.
Heyburn Bldg., Louisville 2, Ky.

Harza Engineering Co.
Consulting Engineers
E. M. Harza
E. Mumford Finch, Calvin V. Davis
Hydro-Electric Power Projects, Transmission Lines, System Studies, Design, Construction Supervision, Reports, Valuations, Harbor Structures, Soil Mechanics
400 W. Madison St., Chicago 6, Ill.

Pioneer Service & Engineering Co.
Consulting and Design Engineers
Investigations, Purchasing, Appraisals, Construction, Operation, Public Utilities, Industrials
231 S. La Salle St., Chicago 4

Sargent & Lundy
ENGINEERS
Steam and Electric Plants
Industrial Buildings
Design, Reports
Investigations
Chicago

Interstate Engineering
Consulting Engineers
Design and Supervision of Municipal Improvements
Water, Power, Sewage, Drainage, Refuse Disposal
Rock Island, Illinois

Jenkins, Merchant & Nankivil Consulting Engineers
Water Systems, Power Development, Flood Control, Airports, Traffic Surveys, Municipal Improvements, Sewerage, Industrials, Plants, Recreational Facilities, Investigations and Reports
305 East Miller St., Springfield, Ill.

Boyd E. Phelps, Inc.
Engineers
Water Supply and Purification, Sewage and Industrial Waste Treatment, Power Generation, Airfields, Reports, Investigations, Appraisals
627 E. Franklin St., Michigan City, Ind.

PROFESSIONAL SERVICES

Cards arranged by states, cities, names — **Additional cards on preceding and following pages**

Chas. W. Cole & Son

Sewerage, Sewage Treatment, Industrial Wastes, Water Supply, Water Treatment, Airports, Industrial Buildings
Chas. W. Cole, Sr. Chas. W. Cole, Jr.
Ralph J. Hoshee, M. J. McKlain
Wilbur H. Gartner
220 W. LaSalle, South Bend, Ind.

Stanley Engineering Company,

Consulting Engineers

Airports — Irrigation — Electric Power Line & Control — Industrial — Rate Studies — Sewerage — Valuations — Water Works
Herndon Building — Muscatine, Ia.

G. Douglas Andrews Associates

Engineering Consultants

General Engineering and Accounting Services
Valuations and Management
212 Washington Avenue
Towson, Baltimore 4
Maryland

Saxe, Williar & Robertson

ENGINEERS - CONSULTANTS

Bridges, Structures, Foundations, Industrial Buildings

Baltimore — Richmond
Maryland — Virginia

Whitman, Requardt and Associates

Engineers — Consultants

Civil — Sanitary — Structural
Mechanical — Electrical
Reports, Plans, Supervision, Appraisals
1304 St. Paul Street
Baltimore 2, Maryland

Chas. T. Main, Inc.

Engineers

Design and Supervision of Construction & Industrial Plants
Electrical, Steam and Hydraulic Engineering
Investigations, Reports and Appraisals
Chamber of Commerce Bldg.
89 Federal St., Boston, Mass.

Metcalf & Eddy

ENGINEERS

Investigations — Reports — Design — Supervision of Construction — and Operation — Management — Valuation — Laboratory
Statler Building — 130 Federal St.
Boston 16 — San Francisco 4

Philip B. Streander and Affiliates

Water Supply Engineers — Consulting Sanitary Engineers

Water Supply — Treatment — Distribution — Sewerage — Disposal — Reports
One Atlantic Ave., Boston 10, Mass.

Chas. F. Dingman

Engineer

Consultation-Construction-Cost
Appraisals-Reports
Estimates of Cost of Projected Construction or Expansion
Established 1923
Peoria, Illinois

Black & Veatch

Consulting Engineers

Water, Sewage, Electricity, Industry
Reports, Design, Supervision of Construction, Investigations, Valuation and Rates
1500 Broadway, Kansas City 2, Mo.

Burns & McDonnell Engineering Company

Consulting Engineers — *78 Years*

Water, Water, Light and Power, Sewerage, Reports, Design, Supply, Rate Investigations
Box 7887, Country Club P. O.
9400 N. Tracy, Kansas City, Mo.

Harrington & Cortelyou

Consulting Engineers

Frank M. Cortelyou
E. M. Newman — F. M. Cortelyou, Jr.
Movable and Fixed Bridges of All Types, Foundations and Related Structures.
1001 Baltimore — Kansas City 6, Mo.

Russell & Axon

Consulting Engineers

Geo. S. Russell — F. E. Weiget
Joe Williamson, Jr.
Water Works, Sewerage, Sewage Disposal, Industrial and Power Plants, Appraisals
495 Olive Street, Municipal Airport
St. Louis 2, Mo. — Daytona Beach, Fla.

Sverdrup & Parcel

Consulting Engineers

Bridges, Structures and Reports, Industrial and Power Plant Engineering
Syndicate Trust Bldg., St. Louis 1, Mo.

William J. Wenzel

Consulting Engineer

Great Falls, Montana
Developing the Great Northwest

Edwards and Kelcey

ENGINEERS

Surveys, Reports, Economic Studies, Design, Supervision, Transportation, Traffic, Parking, Terminals, Highways, Expressways, Grade Separations, Bridges, Tunnels, Water Supply
One Passaic Building, Water Supply
200 Market Street, Newark 2, N. J.

Benjamin L. Smith & Associates

Engineers

Investigations, Reports, Design, Supervision, Valuations
Municipal Engineering and Public Utilities
21 North Pearl St. — Albany 7, N. Y.

F. D. Cooper

Consulting Engineer

Foundations
Design
Investigation
20 Lakeside Road
Newton, New York

E. Lee Heidenreich, Jr.

Consulting Engineer

Quarries — Plant Layout
Crushing Plants — Storage
Milling Plants — Methods
Concrete Pipe — Design
Mixing Plants — Appraisals
40 Central St., Saugerties, New York

Barker & Wheeler

Water Supply — Utility and Sewerage — Industrial
Sewage Disposal — Valuations
Power Systems — Reports

New York City, 11 Park Place
Albany, N. Y., 36 State St.

Clinton L. Bogert Associates

Consulting Engineers

Water and Sewage Works
Refuse Disposal — Industrial Wastes
Drainage — Flood Control
521 Madison Ave., New York 22, N. Y.

Bowe, Albertson & Associates

Engineers

Water and Sewage Works, Design & Supervision
Water, Refuse Disposal, Municipal Engineering, Valuations, Laboratory
Laboratory, Laboratory
1115 Wilson Ave., New York 37, N. Y.

Buck, Seifert & Jost

Consulting Engineers

Formerly Nicholas S. Hill Associates

Water Supply — Sewage — Hydraulic Developments, Reports and Valuations
Chemical and Biological Laboratories
New York City, 112 E. 19th St.

L. Coff

Consulting Engineer

Prestressed Concrete
Bridges and Frames
299 Broadway — New York 7, N. Y.

Hugh L. Cooper & Co.

Incorporated

General Hydraulic Engineering

Including the design, financing, construction and management of hydro-electric power plants.

350 Fifth Ave., New York 1, N. Y.

Ebasco Services Inc.

ENGINEERS
CONSTRUCTORS
BUSINESS CONSULTANTS

Design and Construction
Financial and Operating Consultation
Investigations and Reports
Consulting Engineering

Two Rector Street — New York
208 S. LaSalle Street — Chic. 4, Ill.
1004 K Street, N.W. — Wash. D. C.

Fay, Spofford & Thorndike

Engineers

Charles M. Spofford — Ralph W. Horne
John Ayer — William L. Hyland
Glen A. Bowman — Frank L. Lincoln
Carroll A. Farwell — Howard J. Williams

Bridges and Industrial Plants
Water Supply and Sewerage Works
Port and Terminal Works — Airports
Valuations, Investigations, Designs, Supervision of Construction.

11 Beacon St., Boston, Mass.
420 Lexington Ave., N. Y.
(Graybar Bldg.)

Fraser-Brace Engineering Co., Inc.

DESIGN - CONSTRUCTION - REPORTS - APPRAISALS
COMPLETE MANAGEMENT OF PROJECTS

10 East 40th St.
New York 16, N. Y.

The Haller Testing Laboratories, Inc.

Testing and Inspecting of Concrete, Bituminous and Soil Materials
[illegible] Ave., New York 17, N. Y.
New York, N. Y. • Hartford, Conn.
New Haven, Conn. • Trenton, N. J.

Hardesty & Hanover

Consulting Engineers

Successors to Waddell & Hardesty

Bridges
Any Spans of All Types
Movable: Lift, Bascule and Swing
Hammer-Skew Bascule
Steel and Concrete Spans
Grade Crossing Eliminations

Other Structures
Foundations
Supervision, Reports, Appraisals

101 Park Avenue, New York 17, N. Y.

Frederic R. Harris, Inc.

CONSULTING ENGINEERS

Harbors, Ports & Docks, Drydock, Foundations, Soil Mechanics, Sanitary & Industrial Waste Disposal, Water Supply, Flood Control, Airports, Highways, Bridges, Power, Industrial Plants

25 William Street — New York
Fidelity Title & Trust Bldg. — Philadelphia
Ferry Bldg. — San Francisco

Howard, Needles, Tammen & Bergendoff

Consulting Engineers

Bridges and Structures

New York, N. Y., 55 Liberty St.
Kansas City, Mo., 921 Walnut St.

Knappen Tippetts Abbett Engineering Co.

Ports, Harbors, Flood Control, Power, Dams, Bridges, Tunnels, Highways, Subways, Airports, Traffic, Foundations, Water Supply, Sewerage, Reports, Design, Supervision, Consultation.

62 West 47th Street, New York City

Lockwood, Kessler & Bartlett, Inc.

ENGINEERS — SURVEYORS

General Engineering Services
Aerial and Ground Surveys
Photogrammetric Mapping
Domestic and Foreign

32 Court St. — Brooklyn 2, N. Y.

Modjeski and Masters

Consulting Engineers

Design, Supervision, Reports, Inspection and Investigations of Bridges, Structures and Foundations.
135 Fifth Ave. — State Street Bldg.
New York, N. Y. — Harrisburg, Penna.

Moran, Proctor, Freeman & Mueser

Consulting Engineers

Foundations for Buildings, Bridges and Dams, Tunnels, Bulkheads, Marine Structures, Soil Studies and Tests; Reports, design and supervision.

New York 17, N. Y., 420 Lexington Ave.

PARIS — PROCTOR — FREEMAN
A. MUESER
Ap. Corrlos 614 — Caracas, Venezuela

Parsons, Brinckerhoff, Hall & Macdonald

ENGINEERS

Airports, Bridges, Tunnels, Highways, Traffic and Transportation Reports, Subways, Foundations, Harbor Works, Valuations, Power Developments, Industrial Buildings, Dams, Sewerage, Water Supply.

51 Broadway, New York 6, N. Y.

D. B. Steinman

Consulting Engineer

Bridges
Design, Construction, Strengthening, Investigations, Reports, Advisory Service.

117 Liberty St., New York 6, N. Y.

Economy

The service of the Consultant can usually be an economy in coping with your most intricate problems.

PROFESSIONAL SERVICES

Cards arranged by states, cities, names — **Additional cards on preceding pages**

Malcolm Pirnie Engineers

Civil & Sanitary Engineers

Malcolm Pirnie — Ernest W. Whitlock
Richard Hazen — G. G. Werner, Jr.

Investigations, Reports, Plans, Supervision of Construction and Operations, Appraisals and Rates

25 W. 43rd St., New York 18, N. Y.

The Pitometer Company

Engineers

Water Waste Surveys
Trunk Main Surveys
Water Distribution Studies
Pentstock Gaugings

New York, 50 Church St.

Alexander Potter Associates

Consulting Engineers

Water Works, Sewerage, Industrial Wastes, Hydraulic Works, Reports, Designs, Appraisals.

50 Church St., New York, N. Y.

Clyde Potts

Weston Gaseti—Stanley N. Williams
Consulting Sanitary Engineers
Sewerage and Sewage Disposal
Water Works and Water Supply
Valuations and Appraisals
30 Church Street, New York 7

Sanderson & Porter

Engineers and Constructors

New York — Chicago
San Francisco — Los Angeles

Scheidenhelm, F. W.

Consulting Engineer

Hydraulic Engineering, Hydro-electric Development, Water Supply, Flood Control, Engineering Problems relating to Water Rights and Water Power Law, Appraisals. 50 Church Street, New York 7, N. Y.

Seelye, Stevenson & Value

Consulting Engineers

Successors to
Ewen E. Seelye & Company
101 Park Avenue
New York 17, N. Y.

Airports, Highways, Dams, Concrete, Steel, Water Supply, Studies, Appraisals & Industrial Plants.

Ewen E. Seelye, Albert L. Stevenson, Holcombe R. Value

H. S. Woodward, Assist. M. ASCE
C. H. Hamilton, J. Parke, Jr., M. ASCE
Theo. R. Salzberg, W. D. Bailey, J. L. Wissenbaker, A. R. Kelly

Ole Singstad

Consulting Engineer

TUNNELS

Investigations, Reports, Design, Construction Supervision

15 Whitehall St., New York 4, N. Y.

Frederick Snare Corporation

Engineers - Contractors

Harbor Works, Bridges, Power Plants, Docks, Docks and Terminals, Difficult and Unusual Foundations & Specialty

233 Broadway, New York City 7
1500 South Penn Square, Philadelphia

Havana, Cuba — Lima, Peru
Bogota, Colombia, Caracas, Venezuela
San Juan, Puerto Rico, Guayaquil, Ecuador

Sy-Co Engineers

G. A. Sverdrup, G. Randolph Sverdrup, H. Sverdrup, Consultants
Industrial Plants, Commercial Buildings, Power Plants, Materials Handling Systems
Estimates, Reports, Design, Supervision

New York 6, N. Y.

Taylor, Henry W.

Water Supply, Sewerage
Garbage Disposal, Incineration
Industrial Wastes Disposal
Hydraulic Developments

11 Park Place, New York City

The J. G. White Engineering Corporation

Design—Construction
Reports—Appraisals

80 Broad Street, New York 4

James M. Caird

Established 1898

C. E. Clifton, H. A. Bennett
Chemists and Bacteriologist

WATER ANALYSIS
Trials of Filter Plants

Cannon Building, Troy, N. Y.

Keis & Holroyd

Consulting Engineers

Formerly Solomon & Keis
Since 1906
Water Supply, Sewage Disposal, Garbage & Refuse Incineration, Industrial buildings

Troy, N. Y. — Ft. Lauderdale, Fla.

The Austin Company

Design and Construction

Manufacturing and Process Plants
Airports & Air Transport Buildings
Railroad Terminals and Facilities
Power Plants—Industrial & Institutional
Industrial Office Buildings and Laboratories
Reports and Plant Location Surveys

New York — CLEVELAND — Los Angeles
Chicago — Houston — Oakland
Detroit — Seattle

Havens and Emerson

W. L. Havens — A. A. Emerson
A. A. Burger, F. C. Tilles, F. W. Jones
CONSULTING ENGINEERS
Water, Sewage, Garbage, Industrial Wastes, Valuations, Laboratories

Leader Bldg. — Wadsworth Bldg.
Cleveland 14 — New York 7

Burgess & Niple

Civil and Sanitary Engineers

Consultants since 1909

Water supply treatment and distribution, sewage and industrial wastes disposal, investigations, reports, appraisals, rates, plant operation, laboratory, plans and specifications.

584 E. Broad St. — Columbus 15, Ohio

Jones, Henry & Schoonmaker

Formerly Jones & Henry
Consulting Sanitary Engineers

Water Works, Sewerage & Treatment
Waste Disposal
Stevens Building — Toledo 4, Ohio

Toledo Testing Laboratory

Engineers - Chemists

Inspection — Tests
Research — Development
Concrete, Asphalt, Soils, Cements
Foundations, Reinforcing
Bridges — Structural Steel
Lead Tests

1410 North 10th St. — Toledo 2, Ohio

Glancy, Carle & Marseglia

Engineers

Steel & Concrete Structures
Industrial & Commercial Buildings
Bridges, Piers, Docks, Foundations
Flood Control, Drainage, Reports
1700 Marker Street, Cleveland, Ohio

Benham Engineering Co.

ENGINEERS

Webster L. Benham
M. Am. Soc. C. E.

Water Supply & Purification, Sewerage, Sewage Disposal, Electric Light & Power, Roads, Drainage
Am National Bldg., Oklahoma City, Okla.

Capitol Engineering Corporation

Engineers - Constructors - Management

Bridges — Dams
Planning — Airports
Sewage Systems — Water Works
Design and Surveys — Roads & Streets
Executive Offices: Dillsburg, Penna.

Brookhart & Tyo, Inc.

Engineers

Highways
Industrial Buildings
Bridges and Structures
Design, Estimates, Reports

1720 N. Front St. — Harrisburg, Pa.

Gannett Fleming Corddry & Carpenter, Inc.

ENGINEERS

Water Works, Sewage, Industrial Wastes & Garbage Disposal. Roads, Airports, Bridges & Flood Control. Town Planning, Appraisals, Investigations & Reports.

Scranton Pa. — Pittsburgh, Pa.
Harrisburg, Pa.

Aero Service Corporation

Photogrammetric Engineers

Aerial Topographic Maps
Precise Plane Measurements
Public Relief Models

210 E. Courtland St.
Philadelphia 20, Pa.

Albright & Friel, Inc.

Consulting Engineers

Water, Sewage and Industrial Waste Problems. Flood Relief Projects. Supervision of Construction. Reports, Valuations.

121 So. Broad St., Philadelphia 7, Pa.

Day & Zimmermann, Inc.

Engineers

Designs, Construction, Valuations
Reports and Management
Public Utilities and Industrials
Philadelphia

New York Packard Building Chicago

Frederick H. Dechant

Consulting Engineer

Flood Control
Water Works, Hydroelectric Power, Sewerage, Refuse Disposal
Water Conditioning, Corrosion Prevention
Reports, Valuations, Rates
New York 17 Williamson Bldg.

Fridy - Gauker - Truscott & Fridy

Architects & Engineers

Water, Sewerage, Industrial Waste Investigations, Power & Distribution Airports, Buildings, Town Planning

121 Arch Street, Philadelphia 7, Pa.

William A. Goff, Inc.

General Engineering and Consulting Services

Water, Sewerage, Refuse Incineration, Industrial Buildings, Power Plants, Airports, Town Planning, Plans, Supervision, Valuations, Reports

Land Title Building, Philadelphia 10, Pa.

Hunting, Larsen & Dunnells

Engineers

Industrial Plants, Structures
Bridges, Steel and Reinforced Concrete
Design and Supervision, Reports
1150 Century Bldg., Pittsburgh, Pa.

Morris Knowles, Inc.

Engineers

Water Supply and Purification, Sewerage and Sewage Disposal, Valuations, Laboratory, City Planning

Pittsburgh, Pa.

Gilbert Associates, Inc.

Engineers and Consultants
Design and Supervision of
Steam, Hydro, Water Supply, Sewage Disposal, Diesel Plants and Airports, Valuations, Laboratory

Reading, Pa. — 612 Washington St.
New York — 61 Broadway
Houston — 901 Scanlan Building
Washington, D. C. — 1417 K St., N. W.

Michael Baker, Jr., Inc.

THE BAKER ENGINEERS
CIVIL ENGINEERS, PLANNERS, AND ECONOMISTS
MUNICIPAL ENGINEERS
Airport Design, Sewage Disposal Systems, Water Works Design and Operation, Cons., Surv., Surveys & Maps

Rochester, Pa. — Jackson, Miss.

Lacy, Atherton & Davis

Architects and Engineers

Hotel Sterling Building
Wilkes-Barre, Pa.

Myers & Noyes & Associates

Consulting Engineers

Water Supply, Sewage, Flood Control, Shore Protection, Irrigation and Reclamation, Reports and Valuations
2704 Tower Petroleum Bldg., Dallas, Texas
720 Wilson Building
Corpus Christi, Texas

Lockwood & Andrews

Consulting Engineers

Airports, Paving, Industrial Plants, Drainage, Sewage, Site Examinations, Soils & Foundations, Water Supply Structures, Harbor Works, Valuations, Reports — Design — Supervision

Union Nat'l Bank Bldg., Houston, Tex.

Engineering Services

[illegible] & Erding Engineers
S. D. Caplan, M. ASCE, C. M. [illegible], M. ASCE
Reports, Investigations
Water Supply & Sewerage Systems
Municipal Engineering
Materials Testing
Commercial Bk. Bldg., Salt Lake City

Hutchings & Milani, Ltd.

Engineers & Contractors
Industrial Roads — Power Plants
Dams — Tunnels — Harbor Works
Bridges — Buildings
CARIBBEAN — WEST INDIES — SOUTH AMERICA
BERMUDA CARIBBEAN CONSTRUCTION, LTD.
Hamilton, Bermuda

[illegible] C. W. Milani, ASCE, C. W. Milani, R.I.B.A., N. F. [illegible], A.I.A., F. [illegible], C. E. [illegible], H. E. Wilson, H. B. Page, W. Wilson

HOME OFFICES AT HAMILTON, BERMUDA

Inspecting and Testing

Robert W. Hunt Co.

Inspecting and Testing Engineers

Inspection and Tests of Materials
Supervision of Construction for Utility Plants, Buildings, Bridges, Machinery and Equipment

General Offices and Laboratories
175 West Jackson Boulevard, Chicago
New York — Pittsburgh — 80 Cedar

The Gulick-Henderson Laboratories, Inc.

Inspecting & Testing Engineers

524 Fourth Ave., Pittsburgh 19, Pa.
27 West 42nd St., New York 18, N. Y.
431 South Dearborn St., Chicago 5, Ill.

Consult these Specialists:

[illegible]

BETTER MEASURE WITH LUFKIN

SPEED REPAIRS...
CUT "DOWN" TIME with LUFKIN Precision Tools!

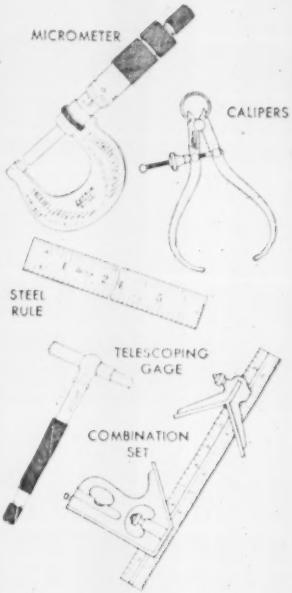

Accurate, fast measuring with *Lufkin* superior precision tools can speed up repairs . . . reduce the time equipment is "down" . . . increase maintenance efficiency? Every single *Lufkin* tool, several of which are illustrated above, is well designed, sturdily constructed, carefully finished, critically inspected. First with scores of improvements and features, *Lufkin* precision tools lead. Favor with mechanics everywhere. When you need Precision . . . Buy *Lufkin*. For complete details write for a copy of *Lufkin* Precision Tool Catalog #7.

Buy LUFKIN

TAPES • RULES • PRECISION TOOLS
THE LUFKIN RULE CO.
SAGINAW, MICH. • NEW YORK CITY • BARRIE, ONT.

NEW PRODUCTS

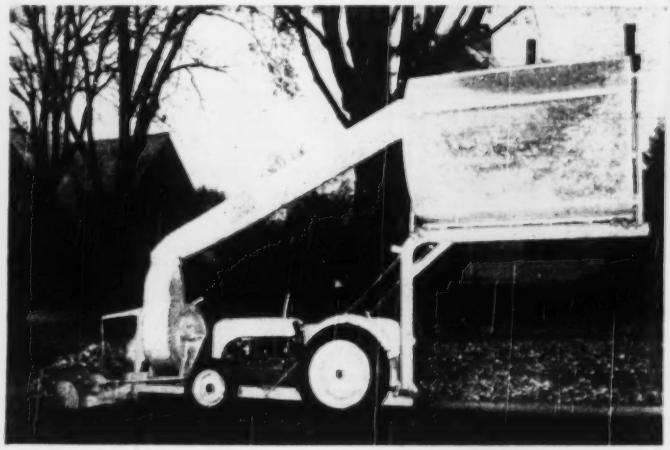

One-Man Leaf Collector

ROAD BOSS LEAF COLLECTOR is designed for quick installation on either Ford or Ferguson tractors, or as a complete unit. Operated by one man, it has a specially designed suction unit with blades that tend to cut leaves and twigs and pass stones, nails, and glass. The nozzle is raised or lowered hydraulically. Collected debris are blown into a hopper or metal basket from whence the load is dumped into a truck. Suction unit is powered by a multiple V-belt drive from the tractor "power take-off."—LAPORTE WELDING & MACHINE CO., P. O. Box 287, LAPORTE, IND.



New Line of Bulldozers

New line of bulldozers and Trailbuilder equipment is designed for use on current model Allis-Chalmers and Caterpillar tractors. Overhead A-frame structures have been eliminated to provide proper balance the full length of the track drive and better visibility for the operator. Equipment can be furnished for rear or front-mounted control units. Bulldozers are available in either rigid-bowl or tilting-bowl types.—SOUTHWEST WELDING & MFG. CO., ALHAMBRA, CALIF.

Electric Steam Boiler

Electro-Matic steam boiler produces small or moderate amounts of steam up to full 90 lbs pressure. It can be used as a steam cleaner and will handle two cleaning nozzles. Tested for working pressures up to 150 lb, it will stand a 300 lb cold-water test. The new Siebrig unit is available in 40, 60, and 90 gal sizes. Boiler hp depends upon number of elements. Each element of 10 kw develops 1 boiler hp. Boilers are furnished in sizes from 1/10th to 10 hp.—SIEBRIG MFG. CO., GEORGE, IOWA.

Electronic Pipe Detector

Feature of the Model 505 pipe detector is use of a metal case to increase durability, and to shield loops and increase efficiency. The 505 can be used to locate pipes and cable, trace their path, to center pipes exactly, and to obtain an estimate of the depth. Location of services, stubs, and valve boxes can also be detected.—DETECTRON CO., 5637 CAHUENGA BLVD., DEPT. E, NORTH HOLLYWOOD, CALIF.

Conveyor Safety Backstop

Automatic prevention of backing up or running away of inclined conveyors, bucket elevators, and similar equip-

(Continued on page 111)

PRODUCTION IS UP!

COSTS ARE DOWN!

WITH P&H ELECTRIC SHOVELS . . .

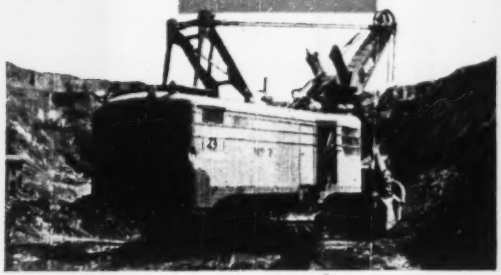

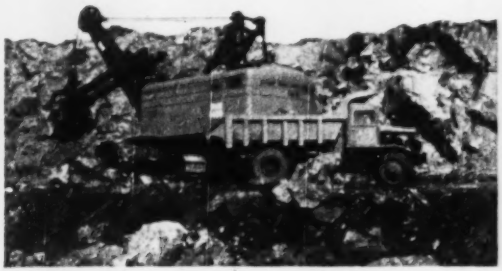

. . . at the Steep Rock Iron Mines in Canada. Here, the first P&H Model 1400 (4 cu. yds.) was quickly followed by two more.

Bigger tonnage at lower cost . . . that's the real test. And there's where you'll find the P&H 1400 leads the way with such features as the Magnetorque* which electro-magnetically powers the hoisting motions . . . *smoother, faster,* and more *dependably.* Quicker move-ups by independent propel add *more* tonnage. Stepless electrical control saves time by eliminating *all* contactor troubles. These and many other P&H features combine to give you increased production. Greater production means greater profits for you. Write, today, for information.

*Trade-mark of Harnischfeger Corporation for electro-magnetic type clutch.

Every third P&H electric shovel sold is a repeat order.

P&H ELECTRIC SHOVELS
4404 West National Avenue
Milwaukee 14, Wisconsin

HARNISCHFEGER CORPORATION

these 12 square inches can mean a vital difference of 20 cubic feet

3 CUBIC YARD MIXER
GUARANTEED TO HOLD, MIX AND AGITATE ITS RATED CAPACITIES AND CERTIFIED TO COMPLY WITH TRUCK MIXER MANUFACTURERS BUREAU STANDARDS AS APPROVED BY N.R.M.C.A.
NATIONAL RMCA CONCRETE INSPECTION
4 1/4 CUBIC YARD AGITATOR
N.R.M.C.A. REGISTRY No. D 3948

Every architect, engineer and contractor knows that a concrete mixer drum must provide elbow room for the materials to mix properly.

Concrete authorities have accurately determined the proportions of such *free mixing space* needed in truck mixers and agitators to insure high strength, quality concrete.

Your eye cannot detect that a machine which claims 3 cubic yards capacity as a truck mixer actually has 20 cubic feet less than the minimum requirement for good mixing—***but it can always see that such a non-standard truck mixer never bears this rating plate.***

Look for this rating plate on the truck mixers that supply your jobs. It guarantees that the supplier is maintaining these quality standards on which the $250,000,000 ready-mixed concrete industry has been built.

The Bureau rating plate is available to any manufacturer who meets its quality standards and requirements

Affiliated with The National Ready Mixed Concrete Association

Truck Mixer Manufacturers Bureau

BLAW-KNOX DIVISION
Pittsburgh, Pa.
CHAIN BELT COMPANY
Milwaukee, Wis.
CONCRETE TRANSPORT MIXER CO.
St. Louis, Mo.
THE JAEGER MACHINE COMPANY
Columbus, Ohio
WORTHINGTON PUMP & MACHINERY CORP.
Dunellen, N. J.
THE T. L. SMITH COMPANY
Milwaukee, Wis.

ment is made possible by a simplified backstop device. This ratchet-type unit automatically operates when power interruption, overload cutout, or failure of the prime mover occurs. It can be mounted in any position on the head shafts of conveyors or elevators.—The American Pulley Co., 4200 Wissahickon Ave., Philadelphia 29, Pa.



Improved Model Gradalls

New design refinements incorporated in the Gradall include: Width of circular roller path around main turntable has been increased; bogie-mounted pair of rollers has taken the place of each single tapered roller formerly used; hydraulic control valve manifold has been moved back adjacent to pumps at the engine, permitting redesign of the operator's cab; a 2,000-lb counterweight at inboard end of main boom balances extended portion of the telescoping boom and increases its lifting capacity; and boom extension rides on five rollers. Appearance has been streamlined and the Gradall is now offered with a diesel power unit as optional alternate to a gasoline engine.—The Warner & Swasey Co., 5701 Carnegie Ave., Cleveland 3, Ohio.



Chalk-Line Box

Self-chalking chalk-line box features an air-tight case for holding both line and pigment. These containers have self-locking handles and feature light weight. Each box is furnished with 50 ft of line, and has a capacity for

(Continued on page 114)

HOW TO CHECK WATER WASTE AND LEAKAGE

with Simplex Pitot Equipment

MLC RECORDER



MAC MANOMETER

PF PITOT ROD

Here is an easy solution to the problems of harassed municipal engineers who are constantly seeking ways of detecting leaking pipe joints or pipe breaks . . . to conserve precious water supplies and prevent wastes. The Simplex pitot rod, manometer, and recorder form an unbeatable team for checking water wastes and measurement of flow through pipe lines in inaccessible places or where permanent measuring equipment is not installed.

Each unit is completely portable, light in weight, rugged in construction and designed to withstand the hard treatment of being moved from station to station. By using this equipment, complete and accurate flow records through branches or trunk mains are obtainable with minimum effort.

Write for free Bulletin #50 describing this equipment, to Simplex Valve & Meter Company, Dept. 5, 6751 Upland Street, Philadelphia 42, Pa.

SIMPLEX

VALVE AND METER COMPANY

BURSTING STRENGTH

Without bursting strength—or, for that matter—without all of the strength factors listed opposite—no pipe laid 100 years ago in *city streets* would be in service today. But, in spite of the evolution of traffic from horse-drawn vehicles to heavy trucks and buses—and today's vast complexity of subway and underground utility services—cast iron gas and water mains, laid over a century ago, are serving in the streets of more than 30 cities in the United States and Canada. Such service records prove that cast iron pipe combines all the strength factors of long life with ample margins of safety. No pipe that is provably deficient in any of these strength factors should ever be laid in city streets. Cast Iron Pipe Research Association, Thos. F. Wolfe, Engineer, 122 So. Michigan Ave., Chicago 3.

CAST IRON PIPE

Strength factors of Long Life !

No pipe that is provably deficient in any of these strength factors should ever be laid in city streets

BURSTING STRENGTH

In full length bursting tests standard 6-inch cast iron pipe withstands more than 2500 lbs. per square inch internal hydrostatic pressure, which proves ample ability to resist water-hammer or unusual working pressures.

SHOCK STRENGTH

The toughness of cast iron pipe which enables it to withstand impact and traffic shocks, as well as the hazards in handling, is demonstrated by the Impact Test. While under hydrostatic pressure and the heavy blows from a 50 pound hammer, standard 6-inch cast iron pipe does not crack until the hammer is dropped 6 times *on the same spot* from progressively increased heights of 6 inches.

CRUSHING STRENGTH

The ability of cast iron pipe to withstand external loads imposed by heavy fill and unusual traffic loads is proved by the Ring Compression Test. Standard 6-inch cast iron pipe withstands a crushing weight of more than 14,000 lbs. per foot.

BEAM STRENGTH

When cast iron pipe is subjected to beam stress caused by soil settlement, or disturbance of soil by other utilities, or resting on an obstruction, tests prove that standard 6-inch cast iron pipe in 10-foot span sustains a load of 15,000 lbs.

CAST IRON

SERVES FOR CENTURIES

1947 1948 1949 1950
Everthing Points
FORECAST

TO A BIGGER CONSTRUCTION YEAR
and MORE BOOMS with..
Owens will point
toward
NEW JOBS!



TODAY, contractors can successfully cope with competitive bidders by equipping themselves with construction machinery that will "pay its own way" by doing more of better work in less time, with lower operating cost.

The "Performance Earned" top rating of Owen Buckets by progressive contractors everywhere is fortified by continued principles of sound design and rugged construction with highest grade materials.

OWEN builds buckets for each and every job requirement

GET THIS NEW CATALOG OF

Owen Buckets and Grapples

THE OWEN BUCKET CO.
6010 BREAKWATER AVE., CLEVELAND 2, OHIO
Branches
New York • Philadelphia • Chicago • Berkeley, Calif.

50 more. Dimensions: 5 in. long, 3 in. wide, and 1 in. deep.—STRAIT LINE PRODUCTS, P. O. BOX 417, SANTA ANA, CALIF.

Hoe-Type Mixer

Mortar, plaster, and concrete mixer has a 6 cu ft drum capacity. The DeLuxe Wonder features sealed hoe and pick shaft bearings, renewable blades, telescoping axle, and adjustable scraper blades. When equipped with caster type wheels, it has a 51 in. overall width. The CMC mixer can be equipped with special grating and bag splitter to comply with safety codes. Abrasion-resisting steel liner is available for heavy-duty work.—CONSTRUCTION MACHINERY CO., BOX 120, WATERLOO, IOWA.

New Product Briefs

Gas unit heater is self-contained and fully automatic. Users of unit heating systems for large buildings requiring instant warmth can heat or restrict heat in sections and rooms at will without basic alterations of the system. Maker: Rezner Mfg. Co., Mercer, Pa.

Fluorescent light starter automatically starts good lamps and cuts out inoperative ones eliminating annoying flicker and conserving the starter. The Gold-O-Matic starter is bonus rated for 10,000 starts. Maker: Luxor Light Products, Inc., New York, N. Y.

Quick-disconnect coupling in 6-in. pipe size is designed for heavy-duty applications. A 90-deg turn makes or breaks the connection. Maker: Roylyn, Inc., Glendale 5, Calif.

Close-coupled steam turbines have integral reduction gears for low-speed applications. The Type E turbine is manufactured by Westinghouse.

Contractors!

Here's the Compressor

YOU ASKED FOR

Built to meet your exacting specifications for a heavy-duty unit from 125 to 350 hp . . . 80 to 125 psi pressures

1. **Built for reliable, continuous full-load service.**
2. **Packaged design** for minimum floor space, and specially balanced for minimum foundation . . . ideal for skid-mounting.
3. **Easy to install and relocate** . . . ready-to-run assembled shipment . . . simplified air and water piping.
4. **Simplifies support for air piping** because connections are on sturdy compressor frame instead of on cylinders.
5. **Totally enclosed, dust-tight construction.**
6. **Easy to operate** . . . push-button starting, grouped controls, automatic force-feed lubrication, automatic condensate removal, automatic air-operated starting unloaders and capacity control.
7. **Easy to maintain** . . . simplified, long-life construction . . . full-floating, cool-running aluminum-alloy bearings . . . no adjustments necessary, no need to open crankcase which stays clean.
8. **Low operating costs** . . . new, high-efficiency, long-life I-R Channel Valves result in compressor efficiency comparable to large units . . . high-efficiency tube-and-finned intercooler saves water . . . efficient direct-connected motor.
9. **Wide range of sizes** . . . 125, 150, 200, 250, 300, 350 horsepower for 80-125 psi discharge pressures.

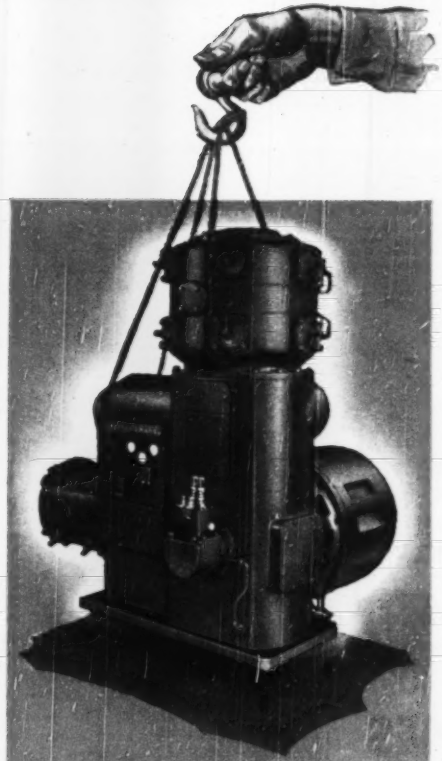

- A "new look" with these new ideas
- Air connections on sturdy frame
- Pipeless, thru-frame air flow
- Packaged, high efficiency intercooler
- Improved Channel valves
- Aluminum, full-floating bearings

Ingersoll-Rand XLE

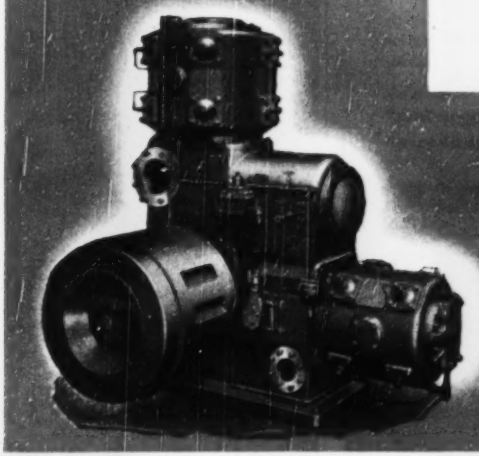

The new *Packaged* L-DESIGN
AIR COMPRESSOR
you'll want to know more about the XLE

Ingersoll-Rand
11 BROADWAY, NEW YORK 4, N. Y. 508-1

ROCK DRILLS • AIR & ELECTRIC TOOLS • OIL & GAS ENGINES • PUMPS • TURBO BLOWERS

only a 1-Man JOB WITH A SAUERMAN EXCAVATOR

Nothing else moves earth quite like a Sauerman Scraper or Cableway Excavator. It saves you dollars and headaches on long range material handling jobs with its simple operation—low fuel requirements—small maintenance charges—flexibility—sturdiness and dependability.

Tough ground conditions don't stop a Sauerman Machine. It will dig and haul anywhere—on a hillside, in muck, deep under water. Controlled by one easily trained man. Gasoline, electric or Diesel power. There's a wide range of sizes and models to meet every requirement.

Illustrations of typical uses, complete specifications, engineering data, are given in the Sauerman Catalog. Write for it now.

Sauerman Slackline Cableway of 1 cu. yd. size pictured above, digs gravel from under water and delivers to screens on top of bins. One man's labor and a moderate expenditure of power moves 65 cu. yd. an hour.

Here is a small Sauerman Power Drag Scraper delivering gravel to a hopper that feeds to a crusher. The scraper, controlled by one man from a central operating station, swings in a wide arc to dig a large, deep pit.

SAUERMAN BROS., Inc.

532 S. Clinton St. Chicago 7, Ill.

Why WISCONSIN ENGINES are Air-Cooled

Air-Cooling, as developed and perfected by Wisconsin Motor Corporation engineers, has these important advantages for the power user:

1. Greatest freedom from cooling chores and troubles. More Service FROM the engine, less service TO the engine; fewer Man-Hours lost; more H.P. Hours on the job.

2. Most efficient cooling at all engine speeds and all temperatures, from sub-zero to tropical highs. The engine never runs out of AIR!

3. Lowest maintenance cost. Integrally cast flywheel fan eliminates all cooling "accessories" . . . nothing to get out of order, wear out, or require replacement.

4. Lighter engine weight and greater compactness . . . for most convenient portability and greatest installation adaptability as power components on original equipment.

Every Wisconsin Engine from the smallest to the largest (3 to 30 hp., single cylinder, 2-cylinder and 4-cylinder) has all the advantages of dependable AIR-COOLING, plus heavy-duty design and construction throughout.

WISCONSIN MOTOR CORPORATION

World's Largest Builders of Heavy-Duty Air-Cooled Engines

MILWAUKEE 14, WISCONSIN

Manufacturers' Publications

Lighting Guide—Concise 32-p "Planning Guide to Improved Plant Lighting" describes latest concepts of good lighting. The guide covers the subject from management's viewpoint, breaking the problem into three major parts: Economics, Program Development, and Equivalent Selection.—BENJAMIN ELECTRIC MFG. CO., DES PLAINES, ILL.

Welding Handbook—Complete data on several new products are presented in revised 52-p pocket-size combination low-temperature welding handbook and catalog. This illustrated booklet lists the All-State rods and fluxes, contains tables of characteristics, full application information, and helpful hints of general interest.—ALL-STATE WELDING ALLOYS CO., INC., 275 FERRIS AVE., WHITE PLAINS, N. Y.

Equipment for Power Control—Loose-leaf catalog describes panel boards, switchboards, control consoles, gage boards, and other power control equipment. Loose-leaf style permits the insertion of timely data sheets as they are made available. The present edition consists of eleven pages describing, besides the equipment listed, the T&C engineering department, list of users of T&C equipment, an example of a typical problem solved by T&C, and other miscellaneous data.—TALLER & COOPER, INC., 75 FRONT ST., BROOKLYN 1, N. Y.

Dust Collectors—Fly-ash collectors for coal and bark-burning boilers are completely described in two bulletins. One bulletin describes the Buhar Type S collector designed to meet plant requirements at minimum operating cost; the other is a thorough discussions of dust and dust problems. The discussion is amplified by the use of numerous engineering tables and charts. Bulletin on the Type S is free; "Dust Problems" costs $1.00.—BUHAR DUST SYSTEMS, INC., OLD LYME, CONN.

Sectional Scaffolding—Basic units and adaptations for constructing sectional scaffolding are subject of a 6-p data sheet. Individual components are illustrated and described in detail. These include the special Waco lock, standard end frames, brackets, putlog, adjustment screw, braces, casters, hangars, and hoist standard. The data sheet lists safety rules for using scaf-

(Continued on page 119)

Don't Let It Rain *Under* Your Pavement

Moisture and other foreign matter...infiltrating at the joint...play havoc with pavement. Get Positive protection with FLINTSEAL.

Here's a short cut to long life and low maintenance for highways, airport runways and other concrete pavement: *protect each and every joint with Flintseal.**

You'll get a smooth, neat joint that *far* outlasts old-fashioned materials. And you get a trouble-free, *positive* seal.

Why? Because Flintseal *stays* resilient. It won't flow . . . even in hottest weather. It won't become brittle and crack . . . even on the coldest days. As a result, Flintseal forms a tight, lasting bond to concrete that maintains a *positive* seal throughout repeated cycles of expansion and contraction of the slab.

Complete information and application data on Flintseal are yours for the asking. Write, today, for your *free* copy of our latest folder on this modern, rubber-bearing, thermoplastic joint-sealing compound.

FOR BEST RESULTS, PREPARE AND POUR FLINTSEAL IN RECOMMENDED EQUIPMENT



One of the specially designed melting kettles used with Flintseal on large jobs.

This recently developed portable kettle is ideally suited to prepare the small amounts of Flintseal necessary for sealing industrial floors, steps, stadia, swimming pools, driveways, roofs and the like.



A special shoe to fill and wipe the joint means that you'll get a clean, neat job with this type pouring pot. Circulating hot oil bath in the jacketed kettle keeps Flintseal at proper pouring temperature.

THE FLINTKOTE COMPANY, *Industrial Products Division*
30 ROCKEFELLER PLAZA, NEW YORK 20, N. Y.

ATLANTA • BOSTON • CHICAGO HEIGHTS • DETROIT • LOS ANGELES
NEW ORLEANS • WASHINGTON • TORONTO • MONTREAL

Flintseal* — FLINTKOTE INDUSTRIAL PRODUCTS

HOT-POURED JOINT-SEALING COMPOUND

when the
BUTLER ENGINEER
has a Hand
in it
...the Design
is RIGHT!
Lines that come from the BUTLER
Engineer's drafting pen are much more than space
dimensions. They represent ingenious solutions
to problems of terrain, material storage and
material flow. They designate the most efficient
traffic movement for workers and vehicles.
They point the way to highly automatic operations
that drastically cut labor costs, that reach
new standards of fast production and greater
profits to the owner.
So, whether it's to be a Road
builder's Plant, — a Ready
Mixed Concrete installation,
or a Concrete Products
Plant — for the
RIGHT solution call in the
BUTLER Engineer.
BUTLER BIN
COMPANY
947 BLACKSTONE AVE.
WAUKESHA, WISCONSIN

foldings, and illustrates typical application of the Waco units.—Wilson-Albrecht Co., Inc., 3565 Woodpale Ave., Minneapolis 16, Minn.

Hand Hoists—Compact, efficient hand hoists in capacities from ½ to 4 tons are described in 6-p Folder DH-164. The booklet includes such information as complete specifications, action photographs, cross-sectional views of the hoists, graphic illustrations, and a listing of the hoist features.—Wright Hoist Division, American Chain & Cable Co., Inc., York, Pa.

The Repair of Cutting Tools—"How to Repair Broken Cutting Tools with Easy-Flo Silver Brazing Alloy" is the subject of Bulletin No. 14. More than twenty before-and-after pictures are used to show the strength, durability, and money-saving features of the use of silver brazing alloy. A 6-p. preface explains the use of these low-temperature alloys in repairing drills, gears, saw blades, and other cutting tools.—Central Steel & Wire Co., P. O. Box 5310-A, Chicago 80, Ill.

One-Ton Lift Truck—Eight pages of model views, action photographs, and descriptive text make up Catalog H35 covering the Hyster 2,000-lb capacity Model 20 lift truck. New features, specifications, and other details of the Model 20 are listed in this bulletin.—Hyster Co., 2953 N. E. Clackamas, Portland 8, Ore.

How to Handle Shellac—Accurate and interesting information on how to use shellac is available in an 18-p. handbook. This bulletin describes the properties of shellac, recommended uses, how to thin shellac, how to cut it to proper consistency, and how to apply it. The booklet also describes staining and color, use of shellac as a base for wax, varnish, paint or lacquer, and other uses.—The Shellac Information Bureau, 65 Pine St., New York, N. Y.

Diesel Engines, Tractors—Caterpillar catalogs available this month include Form 12676 (29 pp) on the D8 tractor, and Form 12725 (16 pp) on Models D397, D386, D375 and D364 diesel engines. Both catalogs are thoroughly illustrated and contain complete specifications and capacity ratings.—Caterpillar Tractor Co., Peoria 8, Ill.

Storage-Tank Floating Roofs—Horton floating roofs for reduction of evaporation loss and corrosion and elimination of fire hazards in flat-bottom tanks storing volatile liquids and

(Continued on page 122)

CLEVELANDS

Built to DELIVER
ON THE TRENCHING JOBS

GAS
WATER
DRAINAGE
SEWER
OIL
CABLE
CONDUIT
GASOLINE
BUILDING
FOUNDATIONS
IRRIGATION

And CLEVELANDS will deliver on your jobs as they have on thousands of miles of trench in all parts of the world for more than 25 years. CLEVELANDS give you more and cleaner trench on more different kinds of jobs through correct wheel-type design and a wide range of transmission-controlled digging and crawler speed combinations. CLEVELANDS give you more actual working time through their tough all-welded construction that means less maintenance down-time and through their quick moves from job to job on truck or trailer. CLEVELANDS give you easy handling and remarkable maneuverability through hairline controls and perfect balance on a wide full-crawler mounting. And CLEVELANDS give you the guts and power to keep your trench out in front under the most punishing field conditions during more months of the year. See your local distributor today or write direct for the full story on how CLEVELANDS deliver MORE TRENCH—IN MORE PLACES—AT LESS COST

THE CLEVELAND TRENCHER CO.
20100 ST. CLAIR AVENUE • CLEVELAND 17, OHIO

NO PUSH . . . NO PULL . . . with

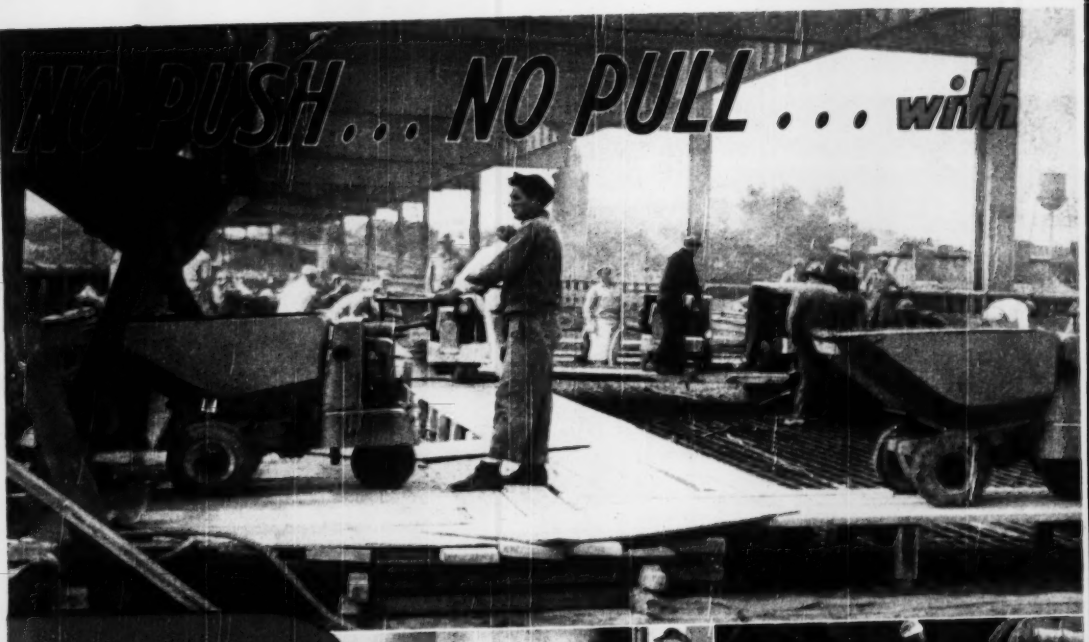

Cuts HARD WORK, HIGH COSTS

Kwik-Mix fully-powered Moto-Bug travels 1½ to 4 m.p.h. both forward AND REVERSE. Power does ALL the hard work.

Positive steering, plus riding step (optional), lets operator ride while traveling, spotting and backing up.

Carries 10 cu. ft. load in big hopper or 1200 lbs. on 4-ft. flat-bed, with one-man economy of operation.

Standard-make 4 h.p., 4-cycle gas engine easily takes full load up 20% grades or ramps.

Results: bigger loads, less operator fatigue, more trips . . . 3 to 4 times more production per man-hour with Moto-Bug.



Handy 33" width easily clears narrow doorways and crowded aisles. Moto-Bug turns in own length. Maneuvering is easy with positive steer.

Low 38" hopper height permits direct discharge from mixer (6-S Dandie illustrated). Power carries load from mixer to forms, keeps output high.

Sturdy 4-ft. flat-bed platform carries 1200-lb. loads . . . has stake pockets for sideboards. Quickly interchangeable with 10 cu. ft. hopper.

Gravity dumps hopper instantly . . . or operator can control rate of discharge by handy rope control. Scoop-shaped hopper is free-flowing.

Send for Moto-Bug bulletin to KWIK-MIX CO. Port Washington, Wisconsin

Name _____ Title _____

Company _____ Dept. _____

Street _____

City _____ State _____

KWIK

(KOEHRING SUBSIDIARY)

Moto Bug

Quick spot, quick dump speed pouring on building and bridge floors. Dual drive wheels are optional equipment . . . dual steel wheels, standard.

Moto Bug easily takes full load up 20% ramps. Operator rides on back step . . . takes it easy . . . moves bigger loads, makes more trips per hour.

-MIX COMPANY

CHESS FORT WASHINGTON, WIS.

ACCURATE . . . "HI-SPEED" ROADBUILDERS' Batcher

Johnson Roadbuilders' Batchers are completely portable . . . adaptable to fit similar bins . . . provide accurate control . . . produce top-quality concrete with utmost economy of materials. Handle 2, 3 or 4 aggregates in sizes for 34-E paver batch or 2, 3 or 4 yd. batch for charging transit mix trucks. Other Johnson sizes, types to fit production problems of any plant.



C. S. JOHNSON COMPANY

Champaign, Ill.

Koehring Subsidiary

310 TRENCHLINER* digs 15' deep, up to 54" wide

For your heaviest sewer, gas and water-main excavation, check this heavy-duty Parsons 310 Trenchliner. Digs to 15' deep . . . 54" wide . . . has 45 digging speeds from 8" to 186" per minute. Boom is telescopic, easily adjusted for digging depths . . . shifts to cut within 15" of either side of machine. Power shifts the arc-type spoil conveyor. 4 smaller Trenchliners also available.



PARSONS COMPANY

Newton, Iowa

HALF-YARD 205 has self-adjusted clutches

With Koehring ½-yard 205, there's no time out for daily manual clutch adjustments . . . no "compromise" settings. You get top operating efficiency from start to end of shift because heat-compensator springs on the 205's six main clutches make all tension changes automatically. That's only one of many ways this heavy-duty 205 gives you more work-time . . . bigger daily output. It will pay you to get all the facts on the 205.

KOEHRING COMPANY

Milwaukee 10, Wis.

Compact...

and TOUGH

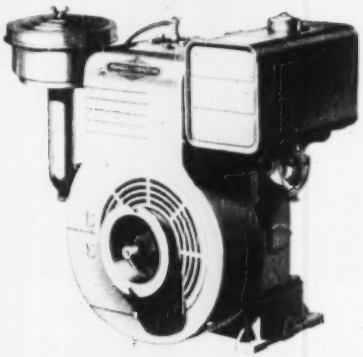

Designed right – then built right – for the toughest kind of service, year after year.

Briggs & Stratton 4-cycle, single-cylinder, air-cooled gasoline engines are produced by an organization with over 30 years of engineering and manufacturing experience gained during the building of more than 4½ million air-cooled engines.

BRIGGS & STRATTON CORPORATION
Milwaukee 1, Wisconsin, U. S. A.

4 CYCLE
BRIGGS & STRATTON
GASOLINE ENGINES

chemicals are described in 20-p Booklet B. Double-deck, pontoon, and pan-type roofs are described, and the type of service for each is discussed. Cutaway views, typical plan views, and cross-section sketches illustrate construction and accessories included with each installation. Details are included for the sealing ring which closes the space between rim of roof and the tank shell.—CHICAGO BRIDGE & IRON CO., 332 S. MICHIGAN AVE., CHICAGO 4, ILL.

Handling of Special Steels—Methods for forming, joining, and painting Zincgrip-Paintgrip sheet steel is contained in an illustrated 12-p. booklet. This Armco product is a special zinc-coated and bonderized sheet steel which can be formed and drawn like mild steel and can be used for house panels, metal ceilings, tunnel equipment, roofing panels, templates, and other applications. Helpful suggestions are supplied on how to weld, solder, clean, and paint this material.—ARMCO STEEL CORP., 1049 CURTIS ST., MIDDLETOWN, OHIO.

Vertical Speed Reducers—Type ND (gear shaft downward) and Type NU (gear shaft upward) vertical speed reducers are completely described in Bulletin 125 (8 pp.). The bulletin lists six outstanding features of the Cleveland units, contains complete dimensional data, cross-section drawing, and thrust and overhung load capacity charts. Specifications are provided for the seven sizes in which each is available.—THE CLEVELAND WORM & GEAR CO., 3249 E. 80TH ST., CLEVELAND 4, OHIO.

Air-Recovery Bulletin—Activated-carbon air-recovery cells for air conditioning systems and units are the subject of this 12-pager. Bulletin 117-C features a description of the Connor Type C unit which is designed to be installed and serviced like standard dust filters, and which require no preliminary engineering design and minimum duct and accomodations. Specifications, arrangement details, capacity and resistance curves, and various types of applications are contained.—W. B. CONNOR ENGINEERING CORP., 116 E. 32 ST., NEW YORK 16, N. Y.

Convector Radiators—Heating With Convector Radiators is the title of a booklet now available. It features the use of clear illustrations and non-technical language to explain principles and advantages of this type of home heating.—CONVECTOR MANUFACTURER'S ASSOCIATION, 221 N. LA SALLE ST., CHICAGO 1, ILL.

ADVERTISERS IN THIS ISSUE

Aero Service Corp. ... 71
Allied Steel Prdcts. Corp. ... 84
American Creosoting Co. ... 4
American Mutual Liability Ins. Co. ... 68, 69
American Steel Dredge Co., Inc. ... 88
Armco Drainage & Metal Products, Inc. ... 16
Autolene Lubricants Co. ... 51

Barber-Greene Co. ... Insert 61-64
Blaw-Knox Div. of Blaw-Knox Co. ... 92
Briggs & Stratton Corp. ... 122
Bucyrus-Erie Co. ... 10, 11
Buff & Buff Mfg. Co. ... 83
Buffalo Products, Inc. ... 83
Builders-Providence, Inc. ... 89
Butler Bin Co. ... 118

Cast Iron Pipe Research Assn. ... 112, 113
Caterpillar Tractor Co. ... 6, 7
Cement Gun Co. ... 89
Chicago Bridge & Iron Co. ... 2nd cover
Cleaver-Brooks Co. ... 91
Cleveland Trencher Co., The ... 119
Concrete Surfacing Machry. Co. ... 87

David House Moving Co., E. F. ... 82
duPont de Nemours & Co., E. I. ... 52

Ellicott Machine Corp. ... 9

Faber, Inc., A. W. ... 80
Fairbanks, Morse & Co. ... 80
Flexible Steel Lacing Co. ... 123
Flintkote Co. ... 117

Gunite Concrete & Construction Co. ... 84
Gunite Florida Corp. ... 82

Harnischfeger Corp. ... 109
Hartford Fire Insurance Co. ... 66
Hayward Co., The ... 84
Hendrix Mfg. Co., Inc. ... 88
Homelite Corp. ... 20
Hyatt Bearing Div., General Motors Corp. ... 14

Ingersoll-Rand ... 115
Imperial Pencil Tracing Cloth ... 65
Ingalls Industries ... 85

Jaeger Machine Co. ... 22
Johnson Co., C. S. ... 121
Johnson, Mfg. Corp. ... 88

Keasbey & Mattison Co. ... 47
Koehring Co. ... 125
Kwik-Mix Co. ... 120, 121

Lehigh Portland Cement Co. ... 24
Leopold & Stevens Instruments ... 3
LeTourneau, Inc., R. G. ... 15
Leyman Mfg. Corp. ... 123
Lufkin Rule Co., The ... 108
Luna Engineering Corp. ... 8

Martin Machine Co. ... 74
McKiernan-Terry Corp. ... 83
Mixermobile Mfgrs. ... 46
Moretrench Corp. ... 67
Murphy Diesel Co. ... 5

Oliver Corp., The ... 1
Owen Bucket Co., The ... 114

Parsons Co. ... 121
Phoenix Bridge Co. ... 86
Pioneer Engineering Works ... 55

Raymond Concrete Pile Co. ... 3rd cover
Rogers Bros. Corp. ... 12

SKF Industries ... 48
Sanstorm Mfg. Co. ... 87
Sauerman Bros., Inc. ... 116
Seaman Motors, Inc. ... 85
Sika Chemical Corp. ... 54
Simplex Valve & Meter Co. ... 111
Smith Co., S. Morgan ... 72
Smooth Ceilings System ... 87
Sprague & Henwood, Inc. ... 88
Staedtler, Inc., J. S. ... 57
Stemco Corp. ... 58

Taylor Forge & Pipe Wks. ... 13
Timken Roller Bearing Co. ... 4th cover
Trinity Div., General Portland Cement Co. ... 90
Truck Mixer Mfgrs. Bureau ... 110

Union Wire Rope Corp. ... 60
Unit Crane & Shovel Corp. ... 9
United States Gypsum Co. ... 75
Universal Mfg. Corp. ... 56
Upright Scaffolds ... 81

Wallace & Tiernan Co., Inc. ... 18
Wayer Impactor, Inc. ... 46
Wellman Engineering Co. ... 86
White & McColl, Inc. ... 80
Wisconsin Motor Corp. ... 116
Worthington Pump & Machry. Corp. ... 8

Yesnaldo Bros. Co. ... 53

Professional Services ... 105, 106, 107

SEARCHLIGHT SECTION

(Classified Advertising)

Employment
Positions Vacant ... 99, 100
Civil Service ... 99
Positions Wanted ... 100
Part Time Work ... 100
Educational
Schools ... 100
Notices
Legal ... 100
Proposals ... 95-99
Equipment
Used & Surplus New
For Rent ... 102
For Sale ... 101-103
Piling ... 103
Pipe ... 103
Rail ... 103
Surveying Instruments ... 102
Wanted
Equipment ... 104

ENGINEERING NEWS RECORD

Business Manager ... Sales Manager

Sales Representatives



NEW! a modern line of self priming-centrifugal CONTRACTORS PUMPS by McGOWAN

Here's the pump with high capacity at low operation speed for longer engine life. All welded construction for lighter, stronger, more durable unit. Automatic priming—no moving parts or jets. Improved non-clogging impeller of special iron alloy. Hardened wear plate, for longer life. Fewer moving parts—hence less wear and lower maintenance cost. Large access plates—making inspection and repairs easier. Fully tested and trouble-free shaft seal.

All McGowan Pumps comply with contractors pump standards as adopted by the AGC. New Units—Rental Units. Repair Parts carried in stock by nation-wide dealers.

LEYMAN MANUFACTURING CORP., CINCINNATI 2, O.

KEEP YOUR CONVEYOR BELTS GOING

FLEXCO H D RIP PLATES are used in repairing rips and patching conveyor belts. Their use saves expensive replacements and extended shut-downs.

● Avoid shutdowns and lengthen the life of your conveyor belts and bucket elevator belts by using Flexco belt fasteners. Thousands of companies have stepped up the performance of conveyor lines and cut costs by using Flexco methods.

FLEXCO H D BELT FASTENERS make a strong, tight butt joint with long life. Reversible plates embed in belt, compress belt ends and prevent pile separation. Serrated in steel and always

Bulletin F-100 shows exactly how to make tight butt joints in conveyor belts with Flexco. Also illustrates step by step the latest practice in repairing rips and putting in patches.

Write for your copy.

FLEXIBLE STEEL LACING CO.
4656 W. Lexington St., Chicago

FLEXCO H D BELT FASTENERS

Sold by supply houses everywhere

PERSPECTIVE . . .

". . . and damned if you don't"

If you're going to set up an authority to do public works, or direct or work for one, here's one fact for constant reference:

You may be only quasi-public—you may be paying your own way out of tolls or other charges, and have no taxing powers—but to the public you're a public agency. Your every action is open to examination, criticism and suggestion by a public that feels it may comment.

The public wants you to run your business on business principles. But the minute you start acting like big business—rejecting contracts, for example, because you don't think the bidder can do the job, or for other good business reasons—you can expect something that doesn't worry big business. The public want to know why.

• **Non-political, but**—The public wants you to stay out of politics too. At least it does until the public has a relative who needs a job, or unless a contractor feels aggrieved that he was not considered qualified. Then pressure is brought, and since your authority is non-political it is a wide-open and rather defenseless target.

Take it from Austin J. Tobin, executive director of the mammoth Port of New York Authority, that isn't the end of the tribulations. You decide to select or prequalify your bidders, so that you won't have to reject any of them, and the contractors not selected raise hue and cry. You're damned if you do, and damned if you don't.

Tobin should know. It's all happened to him, and recently. Solidly built, of medium size, gray-haired and rather handsome, he employs a lawyer's command of gesture and words to make his points. Independent, politically without blemish, he was on the PNYA legal staff 15 years before acceding to his present $45,000-a-year post eight years ago.

• **First—a purpose**—The nutshell, says Tobin, is this: An authority can get a lot of things done that a municipality or a state cannot. But it's no sleight-of-hand trick.

To run an authority and have it function, you need a purpose like that behind PNYA: the development of the vast Port of New York. Here was a job that couldn't be done separately by the two states (New York and New Jersey) and the dozen cities that share the world's greatest natural harbor.

So, in 1921, the states entered what was in effect a treaty, pledging themselves to regional cooperation in developing the whole harbor area and northern New Jersey, through PNYA. The terms of the treaty were very broad—authorizing development of terminal and transportation facilities even to include air transport.

No lusty infant, the authority was immediately put on its own—it was directed to proceed "as rapidly as may be economically practicable" with the details of a plan submitted in 1922) for the port development. Actually, it took 10 years—during which operation of the mint-like Holland tunnel was turned over to the agency—before PNYA finally became self-supporting. Up to then, the two states had appropriated $300,000 a year each to the support of their growing child, plus "substantial" contributions toward the construction of its four bridges.

Until the war days—with a few exceptions such as the Union railroad freight terminal in lower Manhattan—the authority commissioners had kept their agency pretty well in the business of building highway transport facilities. During the depression and the war, it operated these facilities. Postwar, it got up new steam to carry forward the plan of port development, to build truck terminals, take over airports (Newark, LaGuardia, Idlewild), and take over one port facility (Newark) and make offers (after the cities had requested them) to take over others (Jersey City, Hoboken, New York).

• **Then a staff**—Next in importance, in Tobin's book, is an independent board of commissioners, with wide business and professional experience. PNYA's 12 non-salaried commissioners represent almost every major interest in the two-state area, act in the capacity of the Board of Directors of any large corporation.

The staff below this level must be in a well-paid career service, offering advancement and pay-



Austin Tobin. . . . He's in the middle.

ment, efficiency and exams.

• **Then business**—Fiscal policies rate high in importance. PNYA, whose 1950 budget is $82,075,600, has set itself a two-point policy:

(1) To impress the need for budgeting on every staff member; (2) to make the budget sufficiently accurate for "intelligent cost comparisons, and sufficiently flexible to meet new developments with a minimum of red tape and delay.

So PNYA starts each year with a lump-sum budget, subject to change by the board if conditions warrant. Each unit and division with responsibility for performance of a job is held to budgetary responsibility for that job; the accounting system has been integrated with the budget so that accounting information needed for budget control is always available.

PNYA uses a corporate accounting system far different from normal municipal or governmental accounting. Thus operating facilities are charged with all overhead, including allocated overhead for use of centralized services and the cost of general management.

And just to prove PNYA is big business, here are some added facts. During its 30 years, the Authority has issued bonds (for projects or refunding) with a face value of $670 million, has spent over $300 million for construction of bridges, tunnels, waterfront facilities, airports and terminals for trucks, buses and railroads. In 1949, vehicular facilities handled 52,700,000 trucks, buses and cars.

• **And a caution**—"Please remember," adds Tobin, "that there is no inherent magic in the creation of an authority. The important thing is not the form, but the degree of determination and the quality and quantity of work that you leaders will devote to it."

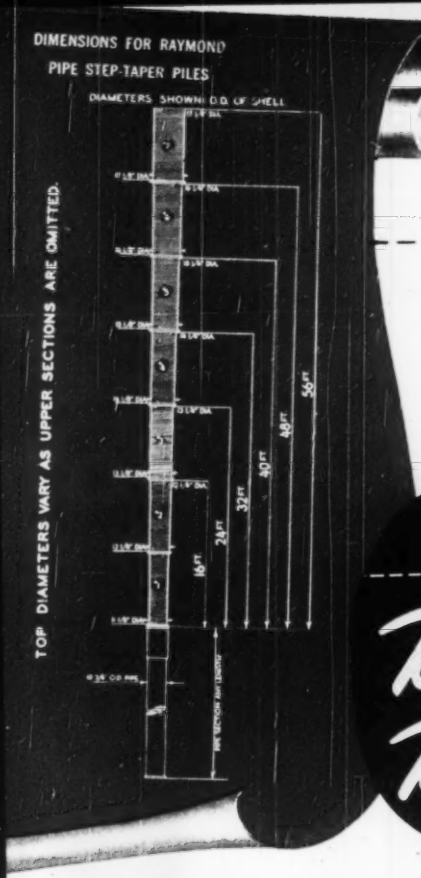

Raymond

MAKES 5 TYPES OF CONCRETE PILES

1. STANDARD . . . 2. STEP-TAPER . . . 3. PIPE STEP-TAPER
4. COMPOSITE . . . 5. GOW CAISSONS

Raymond installs every type of pile: cast-in-place concrete, precast concrete, steel pipe, wood and H-beam. Raymond operations include underpinning, borings and soil investigations, waterfront construction and harbor and river improvements; also cement mortar lining of pipes by the Centriline Corporation, a Raymond Subsidiary.

3. PIPE STEP-TAPER PILES

Deep and Dependable

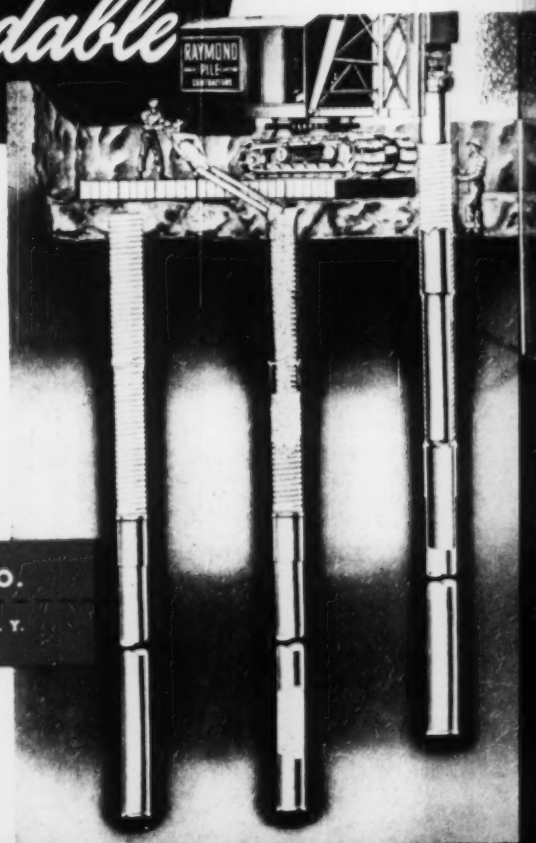

Raymond Pipe Step-Taper Piles are composed of an upper section of Step-Taper Shell Pile and a lower section of closed end steel pipe pile. These piles are generally used to penetrate thick beds of soft soil to reach hard bottom at depths as great as 150 feet or more. The pipe-step-taper pile is a most dependable pile available for reaching hard ground at great depths.

Raymond's methods result in efficiencies and substantial savings that are well worth investigating. Consult our engineers for more detailed information.

RAYMOND PILES MAINTAIN DRIVING RESISTANCE

Raymond CONCRETE PILE CO.

140 CEDAR STREET, NEW YORK 6, N. Y.

BRANCH OFFICES: Boston, Syracuse, Philadelphia, Baltimore, Washington, Pittsburgh, Atlanta, Miami, Houston, Kansas City, St. Louis, Cleveland, Chicago, Detroit, Salt Lake City, Portland, San Francisco, Oakland, Los Angeles and principal cities in Latin America

New Payloader has 4-wheel drive and 20 TIMKEN bearings

IN addition to 4-wheel drive, the new Payloader recently introduced by The Frank G. Hough Company offers a whole raft of features. Power booster steering. Fully reversing transmission. Timken Detroit axle assembly. 4 speeds forward and reverse. And many others. And to insure long life and trouble-free operation, the wheels, steering axle and front axle are equipped with Timken® tapered roller bearings.

Due to the line contact between the rolls and races, Timken tapered roller bearings have extra load carrying capacity. Their tapered construction enables them to take any combination of radial and thrust loads. Wheels and shafts are held in proper alignment.

Timken bearings are manufactured to extreme limits of precision and finished to incredible smoothness, resulting in practically friction-free operation. Under normal usage they last the life of the machine because they are (1) carefully engineered for the job, (2) made of Timken fine alloy steel, and (3) precision manufactured.

For over half a century, the dependable performance of Timken bearings has made Timken-equipped products first choice throughout industry. When you specify bearings, specify Timken bearings. And when you buy new equipment, look for the Timken bearing equipped label on the machine—the trade-mark "Timken" on the bearings. The Timken Roller Bearing Company, Canton 6, Ohio. Cable address: "TIMROSCO"

This symbol on a product means its bearings are the best.

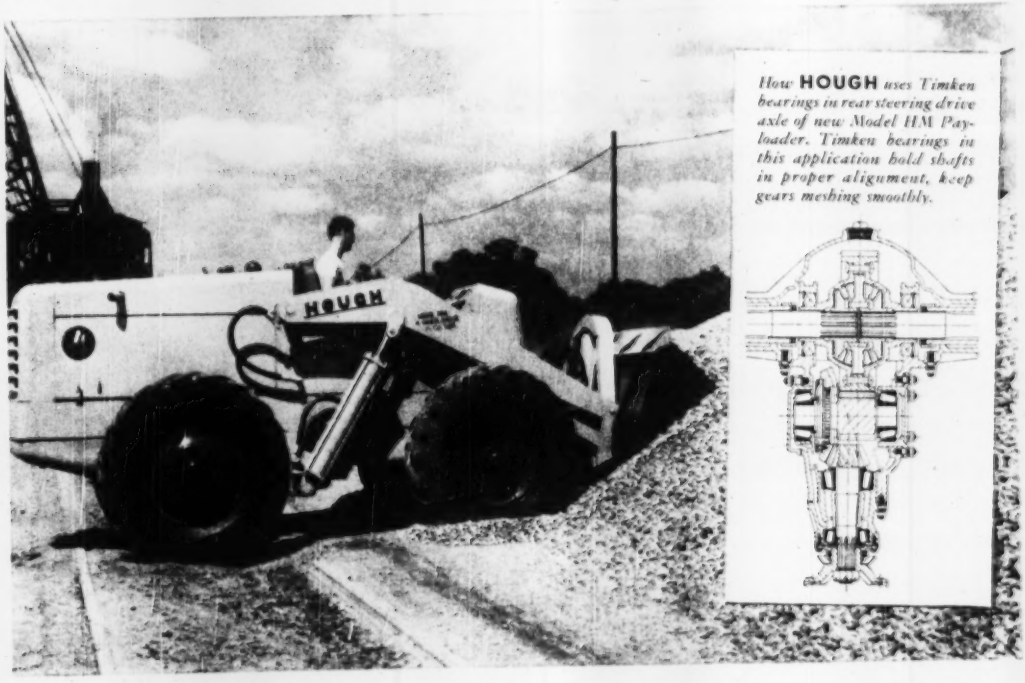

How **HOUGH** *uses Timken bearings in rear steering drive axle of new Model HM Payloader. Timken bearings in this application hold shafts in proper alignment, keep gears meshing smoothly.*

WE MAKE OUR OWN STEEL

The special grade alloy steel which gives Timken bearings their strength and resistance to wear, is made in our own steel mills.

The Timken Roller Bearing Company is the acknowledged leader in 1. advanced design, 2. precision manufacturing, 3. rigid quality control, 4. special analysis steels.

TIMKEN

TAPERED ROLLER BEARINGS



NOT JUST A BALL NOT JUST A ROLLER THE TIMKEN TAPERED ROLLER BEARING TAKES RADIAL AND THRUST LOADS OR ANY COMBINATION